



okuma

2022 Europe & Russia Tackle

INSPIRED FISHING

RISING WITH EVERY CHALLENGE

The average person might stumble upon a remote beach and find inspiration in the texture of the sand, curl of the waves and the salty spice of the air. For the community of anglers, however, playing witness to nature is far less satisfying than direct participation.

As we approach every piece of water, our attention inevitably falls to what lies beneath the surface: beneath the waves, off the point, on the edge of structure, at the intersection of currents. It's the fish and their habits, their power and speed that captivate our attention. Through rod and reel we find our connection. Some call it sport. We call it a way of life that's rich with experiences.

At Okuma Fishing Tackle, our goal is to enhance every encounter. Integrating the latest advancements in materials and construction techniques is a means to downplay the presence of the gear. Eliminate weight and increase feel. Enjoy a running fish instead of fearing it. Button down the drag and go toe-to-toe with complete confidence. Your focus is not on the equipment; it's on the fish.

Wherever your travels take you, from the local pond to distant reef, we're proud to be your partner in the discovery of what lies beneath.

OKUMA FISHING TACKLE CORPORATION



1 SPINNING REELS

- 15 Makaira
- 17 Cedros
- 20 Azores
- 21 Azores XP
- 22 Helios SX
- 23 Inspira
- 27 ITX Carbon
- 28 Epixor XT
- 29 Epixor LS
- 30 Ceymar XT
- 31 Ceymar TG
- 32 Avenger
- 33 Tomcat / Scorpio
- 34 Safina Pro / Safina
- 35 Solaris / Jaw
- 36 Altera / Alaris
- 37 Azaki / Pink Pearl V2
- 38 Carbonite / Revenger Pro
- 39 Revenger / Cascade
- 40 Aria "A" / Electron
- 42 Surf 8K / Rockaway
- 43 Distance Surf Arena / Distance DTA
- 44 LS Baitfeeder
- 46 8K Baitfeeder
- 48 T-REX / Custom Black
- 49 Big Bomber Spod / INC
- 50 Custom Carp
- 51 Custom
- 52 Booster Carp / Atomic Carp
- 53 C-Fight / Custom Black Feeder
- 54 Coronado CDX / Aventa Baitfeeder
- 55 Tomcat Baitfeeder / Avenger ABF
- 56 Ceymar Baitfeeder
- 57 Longbow / Longbow XT Baitfeeder
- 58 Pulzar Baitfeeder / Barbarian Baitfeeder
- 59 Dyna Drag XP Baitfeeder / Powerliner Pro
- 60 Lotus Baitfeeder / AK Baitfeeder
- 61 Carbonite B-feeder / Carbonite XP Baitfeeder
- 62 Ceymar XT Mach FD / Carbonite V2 Match
- 63 Carbonite XP Feeder / Carbonite Match

2 BAITCAST REELS

- 67 Hakai
- 68 Komodo SS
- 69 Citrix / Serrano
- 70 JAW / Ceymar
- 71 Scorpio / Fuel Spin

3 TROLLING REELS

- 74 Tesoro
- 75 Cortez
- 76 Magda Pro Line Counter
- 77 Convector Line Counter
- 78 Convector LP Line Counter
- 79 Cold Water Line Counter
- 80 Classic Pro XPD
- 81 Classic Pro
- 86 Makaira
- 88 Makaira SEa
- 90 Makaira SEa Silver
- 92 Alijos
- 94 Cavalla
- 96 Solterra SLX

4 FLY AND CENTERPIN REELS

- 100 Airframe / Aventa
- 101 Helios SX / SLV Fly / Sheffield

5 RODS

- 108 Helios Air
- 109 Helios SX Travel
- 110 Helios
- 111 ONE.rod
- 112 Inspira
- 113 Epixor
- 114 Epixor Travel
- 115 Pro Perch / Pro Crank
- 116 PCH Air / Specialist Heavy
- 117 Psycho Perch Spin
- 118 Predator Classic Pro 2 / Predator Classic Pro
- 119 Beater Tournament
- 120 Altera
- 121 Altera Travel
- 122 Alaris
- 124 Competition
- 125 Hexana II / Hexana
- 126 LRF / G-Control
- 127 Dead Ringer / Seatrout Spin
- 128 Azaki / Pink Pearl V2
- 129 Safina X / Hot Rod
- 130 Aria
- 131 Fuel Spin
- 132 Wave Power
- 133 Light Range Fishing / G-power Spin
- 134 Light Range Fishing Tele Spin / Altera Tele Spin
- 135 Carbonite Tele / Amigo Tele Spin / Aventa Tele
- 136 Magda Finn / Salar Trolling
- 137 Tournament Series
- 138 Makaira
- 140 Solterra / SLV
- 141 Cortez
- 142 Catalina / Classic Boat
- 143 Deep Sea Bolento
- 144 Hawaiian Custom Popping
- 145 Azores Slow Jigging
- 146 Magda Air / Cedros "A" Jigging
- 147 F2 / Eclipz / Fast Inchiku 2
- 148 Tataky Pro / Trio Force
- 149 Rodster Spin

- 150 Elettra Surf Performance / Distance Surf Arena
- 151 Surfliner Surf / Wave Power
- 152 Avenger Pro Tele Surf / Alaris Tele Surf
- 153 Avenger Tele Surf / Avenger Tele Boat
- 154 Egi Pro / Big Squid
- 155 Altera EGI / Eging Super
- 156 Aria EGI Tele / Altera EGI Tele
- 158 LS-8k Carp / 8K Carp
- 159 Epix V2 Carp / LS-6K Carp
- 160 Custom Black Carp / Longbow Carp
- 161 C-Fight Carp
- 162 Avenger Carp
- 163 Tomcat / Battle Cat
- 164 8k Feeder
- 165 LS-6K Feeder
- 166 Custom Black Feeder
- 167 Solitron Feeder / Ceymar Feeder
- 168 Revenger Feeder / Siika
- 169 Competition Pole / G-Power Tele Pole
- 170 Meridiana Bolo
- 171 Astral Bolo / Competition Bolo
- 172 Solitron Match / Ceymar Match
- 173 Custom Black Match

6 COMBOS

- 176 Fin-Chaser X / Steeler XP
- 177 Vibe
- 178 Air Frame Fly
- 179 Nomad Xpress Fly

7 ACCESSORIES

- 182 Okuma Clothing
- 185 Okuma Displays

SPINNING REEL TECHNOLOGY



MAXGEAR

Makaira reels feature a forged, machine cut stainless steel main gear paired with a 17-4 stainless steel pinion gear. This gear system is unmatched in this category.



ALG

With today's super braided lines & lighter more compact reels, ALG offers anglers lighter weight gears without compromising on strength & durability. Adding to their longevity, ALG gears are anodized to hold up to the elements much better than traditional gearing materials.



HDGII

Okuma's proprietary High Density Gearing II incorporates an extremely strong alloy composition with a special anti-corrosion coating process. The result is high density, corrosion resistant gears that are built to handle the severe elements & brutal strains placed on a reel's internal gear system.



PRECISION ELLIPTICAL GEARING SYSTEM

The Precision Elliptical Gearing System advantage boils down to one thing & one thing only - performance. By regulating the speed of the spindle stroke, reels equipped with this system wind line more consistently & uniformly on the spool, resulting in level line lay. This creates less friction during casting for increased distance, greater accuracy & longer line life, as well as smoother, more uniform drag pressures. Pick up any Okuma reel equipped with this feature & feel for yourself the balance, smoothness & power that are all characteristics of the Precision Elliptical Gearing System.



SPINNING REEL DUAL FORCE DRAG

DFD incorporates both surfaces of the spool to maximize high-end drag pressure, efficiency & overall smoothness. Mounted in the top of the spool & protected by the Hydro Block system is a multi-disc felt drag system that works in conjunction with a secondary drag system that is mounted under the spool. Even pressure is applied to both surfaces of the spool for maximum stability.



LITECAST™

Litecast™ is the latest in Okuma's reel technology. Reels with the Litecast™ structure are composed using a magnesium material in the casting process, making the integrity of the reel incredibly strong & 15% lighter than aluminum alloy reels. Okuma Cedros Saltwater Spinning Reels feature the new Litecast™ construction.

ALUMILITE FRAME CONSTRUCTION

AlumiLite construction incorporates Okuma's rigid aluminum body technology on spinning, trolling and fly reel designs. Aluminum frames are stronger and more rigid and are capable of withstanding more pressure and torque than traditional graphite frames. These lightweight, diecast aluminum frames provide more precise tolerances for precision gear alignment, maximum castability and ultimate durability.



C-40X

Okuma's C-40X carbon technology utilizes a specially blended graphite polymer. The carbon fibers in this material are elongated & reinforced, creating a substantially stronger composite than standard graphite materials. At 25% lighter, 1.5 times stronger & 100% anti-corrosive, C-40X translates into an extremely lightweight & durable construction.

TORSION CONTROL ARMOR

The Torsion Control Armor (TCA) design found on the new Inspira spinning reels is made with Okuma's C-40X long-strand carbon fiber technology. This not only makes the reel lighter, but also makes the reel extremely rigid which reduces twist & torque, keeping the internal parts in perfect alignment.



CFR CYCLONIC FLOW ROTOR

The Cyclonic Flow Rotor (CFR) was designed to create a "cyclonic" airflow, which significantly increases air flow through the ported rotor. This thoroughly tested design allows for a much faster drying time if the reel becomes wet, minimizing corrosion possibilities throughout the reel.

CENTRIFUGAL DISC BAIL

Okuma's Centrifugal Disc Bail (CDB) is a unique new design that incorporates a heavier brass disc that is perfectly weighted & balanced to create a smoother & easier bail operation, while increasing the strength & stability of the overall bail function.



SPINNING REEL TECHNOLOGY

QUICK-SET

This system allows for instant handle engagement & eliminates all handle back play commonly found in many reels. This is accomplished by using a corrosion-resistant stainless steel roller bearing that engages the reel in one direction for rock-solid hook sets.



EFR II

The Even Flow Roller System utilizes a ball bearing under the line roller to maximize efficiency. This roller helps reduce line twists by freely rolling over the line roller without friction. Without this system, line will naturally twist when drag is pulled.

BAITFEEDING SYSTEM

Okuma's baitfeeding system allows anglers to disengage their spinning reel spool & allow their bait to run freely. The baitfeeding system incorporates a secondary micro-adjustable drag system at the rear of the reel that allows for precise adjustment of the spool for bait control. In order to disengage this system simply turn the handle. The On/Off lever on the rear of the reel will automatically disengage the baitfeeding system so you can fight your fish with the main drag system.


RES II

The RES II System stands for Rotor Equalizing System. This second-generation RES System incorporates a computer-balanced weight precisely placed in the rotor. This weight allows for precision balance & eliminates all spool wobble for perfect alignments & smooth cranking.



HIGH PERFORMANCE BALL BEARINGS

The balls used on the HPB's are constructed from the same high-grade stainless steel material as the bearing housing. These bearings were designed to be more than 10 times more resistant to saltwater than standard stainless steel bearings. These bearings may even outlast the angler himself.



HYDRO BLOCK

The Hydro Block design features a rubber gasket mounted in the top of a spinning reel spool. This rubber seal blocks water & foreign materials from entering the drag system. The Hydro Block system ensures that your drag washers always perform at optimal levels.

LOW PROFILE REEL TECHNOLOGY



LITECAST™

Litecast™ is the latest in Okuma's reel technology. Reels with the Litecast™ structure are composed using a magnesium material in the casting process, making the integrity of the reel incredibly strong & 15% lighter than aluminum alloy reels. Okuma Hakai Baitfeeder Reels feature the new Litecast™ construction.

FLITE™ SPOOL

Flight spool is a Dream Tackle Design allowing Okuma to offer a super tuned spool on our premium baitcast reels. The spool is 33mm in diameter and was developed for long distance casting as well as finesse style fishing. The complete spool design weighs in at just 0.33 ounces as a result of its uniform thickness, which is what helps set this super tuned spool apart from others.



MCS

Okuma's Magnetic Control System reduces backlash & improves casting distance by utilizing the magnetic field generated by the high RPM spinning of the spool during casting. The magnetic field is influenced by the adjustable cast control magnets which exert an opposing force & allows for minute & accurate adjustments.



VELOCITY CONTROL

The Velocity Control System is an adjustable, 6-pin centrifugal braking system for precision spool control. Weights can be adjusted IN or OUT for additional spool control. Positioning the weights in toward the spool allows for more freespool, while adjusting the pins out away from the spool allows for more control. Anglers can alternate weights until they find that perfect balance for casting.



SPOOL ACCESS PORT

This unique new design can be found on Okuma's low profile baitcast reels. The Spool Access Port allows for quick access to the spool by simply sliding the lock/unlock lever on the sideplate opposite the handle. This system allows for quick spool changes, but more importantly it allows quick access for adjusting the Velocity Control System.



FLITE™ SHAFT

Flite shaft is a patented hollow stainless steel spool shaft with precision stainless steel balls pressed on each end. These balls rotate under pressure to reduce friction and help increase casting distance. Providing the perfect balance point between weight, strength and smoothness.



UNIVERSAL LINE DIAM INDICATOR

Always know what line you spooled on your reel when you pick it up.



TGT (Traction Grip Technology)

Okuma TGT is made of non-slip durable materials that not only provides maximum grip, but comfort and control in all weather conditions.

TROLLING AND CONVENTIONAL REEL TECHNOLOGY

XL GEARING



The XL gearing design found on both lever drag & star drag reels incorporates an oversized gear box that features an enlarged gearing system & enlarged drag system. The drag surface areas on this system are more than 50% larger than a standard gear-box design. For the gear system, the major advantage is that the gear teeth are substantially larger, allowing more strength & cranking power. This is how we are able to offer a high-speed gear ratio reel without sacrificing cranking power. Our XL gearing system essentially turns your reel into a winch.

SELF LUBRICATING GEAR SYSTEM

The self-lubricating gear system is a feature found on Okuma's higher-end star drag reels. The main gear on this system incorporates a heat-sensitive oil-impregnated brass bushing that is mounted in the center of the gear. This system releases oil if friction increases to keep the main gear & drive shaft running smoothly in all conditions. Okuma is the first company to adopt this technology which originated in the large machine industry where this function has been time tested for many years.



MACHINED RIGID FRAME



Okuma's Machined Rigid Frame construction incorporates a one-piece fully-machined aluminum frame. These rigid bar-stock aluminum frames are the ultimate in precision alignment & tolerances withstanding more pressure & torque than any other material used in our industry for frame materials. Okuma features these anodized frames on fly reels, baitcast reels, lever drag reels & star drag trolling reels.

LEVER DRAG DUAL FORCE DRAG

For extremely smooth & strong drag outputs, Okuma's Makaira and Alijo's 2-speed reels are designed with a patented Dual Force Drag system. This drag system is specifically engineered to be mounted in the right side of the spool, designed around a Pull Bar Drag System which keeps all mechanical workings in precise alignment & places no pressure on the frame. This system works in conjunction with a custom designed thrust bearing, which alleviates side load at heavy drag settings.



BODY ARMOR

Okuma's stainless steel Body Armor eliminates the frame flex commonly found in graphite framed trolling reels. This feature incorporates two large stainless steel rings that are mounted to both sides of the frame. The harness lugs are integrated into the body armor design & eliminate the pressure commonly placed on the harness lugs by redistributing the pressure to these large-diameter rings.



2-SPEED GEARING

Okuma's 2-speed technology incorporates two sets of stainless steel main & pinion gears, allowing anglers the option of a high-speed gear ratio or a powerful low-speed gear ratio for maximum power & torque. To shift gears it is as easy as pushing a button or popping a lever with Okuma's unique shifting design to obtain the appropriate gear ratio you desire.



SPEED LOC PINION GEAR SYSTEM

The SLG technology incorporates a dual-step pinion gear system on star drag reels that allows positive engaging at extreme high speeds. The SLG system allows for instant gear engagement when engaging from freespool to strike at speeds in excess of 50 MPH.




MSS

Strong, Stable, Smooth - Okuma's Mechanical Stabilizing System is a support system that ties the spool shaft, pinion gear, pinion gear bearing, drive shaft & main gear together with a single support system. While other reels on the market offer minimal or no gear stabilization, this patented Okuma design allows all of these critical parts to stay in precise alignment. Designed specifically to hold up to the demands of braided & wire line fishing, the MSS support system stabilizes the spool shaft at 3 key stress points to eliminate flex under pressure - which directly translates into a reel that is more durable, stronger & smoother than the competition.

MCS

Okuma's Magnetic Control System is a fully-sealed, 100% waterproof cast control system that reduces backlash & improves casting distance by utilizing the magnetic field generated by the high RPM spinning of the spool during casting. The magnetic field is influenced by the adjustable cast control magnet which exerts an opposing force & allows for minute & accurate adjustments.



WIDE MOUTH LEVELWIND

This heavy-duty, stainless steel levelwind is Titanium coated & built to withstand the punishment of both braided & wire lines. The guide has been designed with an increased opening to insure proper knot clearance when fishing with double lines. This wide space allows for Albright or similar connection knots, as well as swivels & copper line to pass through the guide easier & be wound directly on the spool.

STRIKE ZONE

Okuma's Strike Zone linecounter system incorporates a mechanical counter that precisely measures line based on spool revolutions. These counters measure in feet & are calibrated at the factory to be most accurate with a full spool & monofilament lines.



T-BAR HANDLE

T-Bar Handle: The patented design of the T-Bar handle offers a true ergonomically correct angle to ensure an angler gets maximum power with minimum fatigue. The T-bar takes full advantage of the natural dynamics of the human hand, wrist & forearm to help sustain power & endurance for the angler.

ERGO GRIP

The Ergo Grip handle knob is an extremely comfortable oversized handle-knob design for both speed & power. This soft-touch knob has been ergonomically designed to fit in the palm of your hand & will be found on certain Okuma lever drag reels, star drag reels & some spinning reel models.



HIPPO GRIP

The Hippo Grip is a unique reel-clamp design that serves triple duty when fishing offshore. This heavy-duty, forged aluminum reel clamp securely supports your reel to the rod for maximum safety. This clamp also incorporates a small hole that was designed to be used with a safety line for trolling. On the rear of the clamp is a large diameter hole that was designed to be used as a trigger. The large hole should be mounted facing the butt of the rod.



CRC

Okuma's Corrosion Resistance Coating (CRC) consists of a thin layer of Corrosion X HD applied to all internal & external parts. The CRC process actually penetrates & bonds to the metal, which helps significantly in the reduction of corrosion, & towards the long term protection of your reel.





SPINNING REELS

Spinning reels are an opportunity. Worldwide, they're most often the very first reel a beginning angler picks up, and for so many, they're the only reel type that's ever needed. As such, spinning reels define the experience from pond panfish to offshore big game. At every level the Okuma selection is angler-centric, delivering a fantastic fishing experience through better design, materials and construction techniques. Our reels need to inspire participation today, tomorrow and in the future ahead, a responsibility we gladly accept.

The left side of the image features a close-up of a metallic gear assembly. A large, cylindrical gear with a series of teeth is mounted on a shaft. Below it, another gear with a different tooth profile is visible. The MAXGEAR logo, consisting of a stylized 'M' made of three chevrons and the word 'MAXGEAR' in a bold, sans-serif font, is positioned above the gears.

MAXGEAR

The right side of the image shows a welder in a dark, industrial setting. The welder is wearing a protective mask and gloves, and is using a torch to weld a metal component. Bright sparks and a blue flame are visible at the point of contact. The background is dark and out of focus, emphasizing the welding process.

MAXGEAR REACH FOR THE MAX

Okuma's Makaira spinning reels are in a class of their own, featuring a forged stainless steel, machined MAXGEAR. While the majority of reels in this category feature bronze, aluminum or simple machine cut stainless steel gears, the Makaira's class leading main gears are machine cut forged stainless steel. We ported the main gear and incorporated other design elements to keep it light weight enough for you to fish all day. No compromises were made in the internal design of MAXGEAR. The pinion gear and heat treated spool shaft are 17-4 grade machine cut stainless steel. They are rust proof and were optimized to work with braided line and the reels high-output drag.



MAKAIRA[®] SPINNING REEL

Derived from the Okuma 4D Concept which focuses on Design, Drive, Drag and Durability as core performance elements, Makaira spinning reels are built from the ground up to be the toughest, most durable spinning reels an angler can own. Constructed from the finest and strongest materials available, Makaira series reels are big game reels developed to pursue everything from Giant Trevally, trophy-sized Yellowtail and Amberjack, to the most formidable adversaries in the ocean, like giant Bluefin Tuna, Marlin, cow Yellowfin Tuna and large sharks.



MAXGEAR

Makaira reels feature a forged, machine cut stainless steel main gear paired with a 17-4 stainless steel pinion gear. This gear system is unmatched in this category.



The Makaira is unmatched in elite level spinning reels with a forged, machine cut aluminum body, sideplate and rotor. There are no die-cast parts on this reel. The Mak is the elite reel in the category, with a complete forged aluminum housing.



The Makaira drag system utilizes the complete surface area of the carbon fiber drag washers; the system has been engineered to make full contact with the outer edges of our carbon washers, which maximizes efficiency and the ability to deliver high drag outputs. The DFD concept applies pressure to both sides of the spool in order to maximize use of the available surface area, enlarging the working surfaces of our drag system, and dramatically improving heat dissipation.



Makaira spinning reels are engineered to withstand the most brutal conditions the ocean can offer. To accomplish this, we equipped this series with 23 different oil-retaining o-rings and gaskets. Our engineers made this reel impervious to the elements, and by making it water tight, all the internal mechanisms are sealed and protected from salt. The result is the best-of-the-best when it comes to big game fishing reels.

MAKAIRA[®] SPINNING REEL

MAKAIRA SPINNING REELS FEATURE:

- Forged aluminum, machine cut body/sideplate
- Forged aluminum, machine cut Cyclonic Flow rotor
- Forged stainless steel main gear for ultimate power and strength
- Precision machine cut 17-4 grade stainless steel pinion gear
- Oversized 17-4 grade stainless steel spool shaft reduces flex
- Hydro Sealed Body and DFD system for maximum protection
- Carbonite high output drag with Cal's drag grease on full DFD
- Customized pre-set drag system, works like a lever drag reel
- 9HPB + 1RB corrosion resistant stainless steel bearings
- Dual anti-reverse system for maximum strength and reliability
- Quick-Set stainless steel German anti-reverse roller bearing
- CRC: Corrosion-resistant coating process
- Machined aluminum, 2-tone anodized spool with LCS lip
- Machined aluminum screw-in handle arm for added strength
- Right and Left handles are designed differently: Order by Rt/Lt
- Heavy duty, solid aluminum bail wire with manual trip function
- Rotor brake system works in conjunction with manual bail trip
- Machined aluminum handle knob: Custom options available



MK-20000LS
(Left Hand Model)



MK-30000LS
(Left Hand Model)

MAKAIRA SPINNING

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
Left handed High-speed spinning reels											
MK-10000L	4.9:1	9 + 1	810	101.6	25	0.35/380, 0.40/300, 0.45/225	AL	AL	AL	AL	789.00
MK-20000LS	5.8 : 1	9 + 1	997	131.1	30	0.45/450, 0.50/370, 0.55/300	AL	AL	AL	AL	819.00
MK-30000LS	5.8 : 1	9 + 1	1107	166.9	30	0.55/530, 0.60/450, 0.65/380	AL	AL	AL	AL	879.00



INSPIRED BY LIGHTWEIGHT



CEDROS

CEDROS SPINNING REELS FEATURE:

- DFD: Precision Dual Force Drag system
- Multi-disc drag adjustment for more precise settings
- LITECAST: Body construction is 15% lighter
- CRC: Corrosion resistant coating process
- 6HPB + 1RB corrosion resistant stainless steel bearings
- Dual anti-reverse feature on 8000-14000 sizes
- Quick-Set anti-reverse roller bearing
- Manual bail trip function 8000-14000 sizes
- HDGI: Corrosion resistant, High density gearing
- Precision machine cut brass pinion gear
- Machined aluminum, 2-tone anodized spool
- Machined aluminum, screw-in handle arm



CJ-4000H



CJ-10000

CEDROS SPINNING



Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
High Speed											
CJ-4000H	5.8:1	6+1	380	90	15	0.25/280, 0.30/185, 0.35/130	LC	LC	LC	AL	159.00
CJ-5000H	5.8:1	6+1	397	95	15	0.30/240, 0.35/170, 0.40/125	LC	LC	LC	AL	162.00
CJ-6000H	5.8:1	6+1	405	101	15	0.30/315, 0.35/220, 0.40/165	LC	LC	LC	AL	164.00
Regular Speed											
CJ-8000	5.4:1	6+1	624	104	20	0.40/230, 0.45/180, 0.50/140	LC	LC	LC	AL	171.00
CJ-10000	5.4:1	6+1	643	112	20	0.40/290, 0.45/220, 0.50/175	LC	LC	LC	AL	175.00
CJ-14000	5.4:1	6+1	646	116	20	0.40/370, 0.45/290, 0.50/230	LC	LC	LC	AL	179.00



MAG-ALLOY CONSTRUCTION DESIGN


Okuma's LITECAST construction design is 15% lighter than former Azores reels while maintaining maximum strength and durability.

DUAL FORCE DRAG SYSTEM

DFD incorporates both surfaces of the spool to maximize high-end drag pressure, efficiency and overall smoothness. Mounted in the top of the spool and protected by the Hydro Block system is a multi-disc felt drag system that works in conjunction with a secondary drag system that is mounted under the spool. Even pressure is applied to both surfaces of the spool for maximum stability and significantly increased drag output compared to traditional single drag systems.

CEDROS

Saltwater Spinning Reel

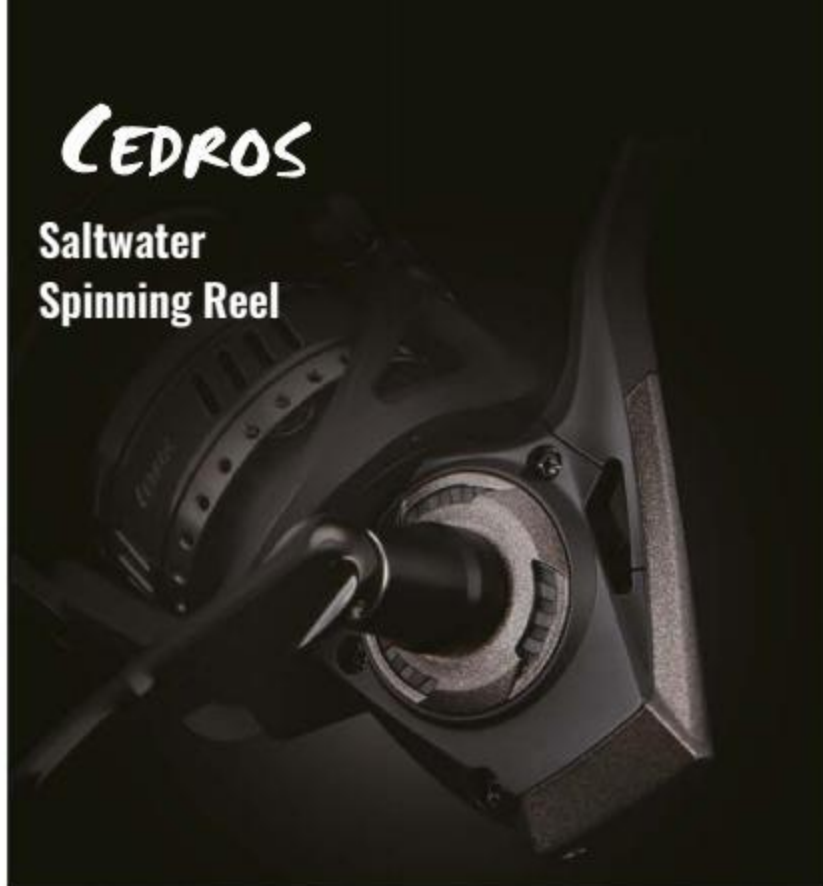

HIGH PERFORMANCE BEARING (HPB)

6 high performance ball bearings provide Cedros with outstanding smoothness and reliability in saltwater fishing environments. The balls used on the HPB's are constructed from the same high-grade stainless steel material as the bearing housing.



GEARING STABILIZATION DESIGN

Ultimate pinion stability for perfect main gear adjustment : super smooth gearing feeling and high durability.



MANUAL BAIL TRIP

Manual bail trip function for both reliability as well as reduces line twists.



AZORES BLUE SALTWATER SPINNING REELS FEATURE:

- DFD: Precision Dual Force Drag system
- Precision click drag adjustment for more precise settings
- Multi-disc, Carbonite and felt drag washers for DFD
- 6HPB + 1RB corrosion resistant stainless steel bearings
- Quick-Set anti-reverse roller bearing plus ratchet system
- Dual anti-reverse system for maximum security
- Precision machine cut brass pinion gear
- CRC: Corrosion-resistant coating process
- HDGII: Corrosion-resistant, High density gearing
- ALC: Rigid diecast aluminum body, sideplate and rotor
- MSS: carbon Mechanical Stabilizing System
- Machined aluminum, 2-tone anodized spool with LCS lip
- Machined aluminum handle arm for added strength
- Hydro Block water tight drag seal
- Heavy duty, solid aluminum bail wire



AZORES-6500

AZORES

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
Azores-4000	5.8:1	6+1	341	90.9	13	0.30/180, 0.35/135, 0.40/105	AL	AL	AL	AL	128.00
Azores-5500	5.8:1	6+1	524	104.6	13	0.35/250, 0.40/190, 0.50/125	AL	AL	AL	AL	139.00
Azores-6500	5.4:1	6+1	730	110.2	20	0.35/390, 0.40/300, 0.50/185	AL	AL	AL	AL	153.00
Azores-8000	5.4:1	6+1	748	120.4	20	0.45/310, 0.50/250, 0.55/210	AL	AL	AL	AL	157.00
Azores-9000	5.4:1	6+1	750	120.4	20	0.45/350, 0.50/280, 0.55/240	AL	AL	AL	AL	159.00



AZORES XP SPINNING REELS FEATURE:

- DFD: Precision Dual Force Drag system
- Precision click drag adjustment for more precise settings
- Multi-disc, Carbonite and felt drag washers for DFD
- 6HPB + 1RB corrosion resistant stainless steel bearings
- Quick-Set anti-reverse roller bearing plus ratchet system
- Dual anti-reverse system for maximum security
- Precision machine cut brass pinion gear
- CRC: Corrosion-resistant coating process
- HDGII: Corrosion-resistant, High density gearing
- ALC: Rigid diecast aluminum body, sideplate and rotor
- MSS: carbon Mechanical Stabilizing System
- Machined aluminum, 2-tone anodized spool with LCS lip
- Machined aluminum handle arm for added strength
- Hydro Block water tight drag seal
- Heavy duty, solid aluminum bail wire



ZXP-16000P

AZORES XP



Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
High Speed											
ZXP-4000H	5.8:1	6+1	335	91	13	0.25/290, 0.30/200, 0.35/150	AL	AL	AL	AL	126.00
ZXP-6000H	5.8:1	6+1	526	105	13	0.30/300, 0.35/220, 0.40/170	AL	AL	AL	AL	133.00
ZXP-8000H	5.4:1	6+1	720	110	20	0.40/250, 0.45/200, 0.50/160	AL	AL	AL	AL	145.00
ZXP-14000H	5.4:1	6+1	738	120	20	0.40/370, 0.45/290, 0.50/240	AL	AL	AL	AL	147.00
ZXP-16000H	5.4:1	6+1	740	120	20	0.40/420, 0.45/335, 0.50/270	AL	AL	AL	AL	149.00
Low Speed											
ZXP-6000P	4.8:1	6+1	526	87	13	0.30/300, 0.35/220, 0.40/170	AL	AL	AL	AL	133.00
ZXP-8000P	3.8:1	6+1	720	77	20	0.40/250, 0.45/200, 0.50/160	AL	AL	AL	AL	145.00
ZXP-14000P	3.8:1	6+1	738	84	20	0.40/370, 0.45/290, 0.50/240	AL	AL	AL	AL	147.00
ZXP-16000P	3.8:1	6+1	740	84	20	0.40/420, 0.45/335, 0.50/270	AL	AL	AL	AL	149.00

Helios SX

HELIOS SX SPINNING REELS FEATURE:

- Light weight C-40X carbon frame and sideplates
- C-40X Cyclonic Flow Rotor for corrosion resistance
- TCA: Torsion Control Armor reduces twisting
- 8HPB + 1RB corrosion resistant stainless steel bearings
- Quick-Set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- ALG: Precision AlumiLite alloy main gear and oscillating gears
- Rigid, machined aluminum, anodized handle

- Light weight, EVA handle knobs for comfort
- Precision Elliptical Gearing system
- Machined aluminum, 2-tone anodized spool
- Heavy duty, solid aluminum bail wire
- RESII: Computer balanced Rotor Equalizing System
- Metal line clip
- LCS line control spool



HSX-40



HSX-40



CYCLONIC FLOW ROTOR

The Cyclonic Flow Rotor (CFR) was designed to create a "cyclonic" airflow, which significantly increases air flow through the ported rotor. This thoroughly tested design allows for a much faster drying.



TORSION CONTROL ARMOR

The Torsion Control Armor (TCA) design found on the new Inspira spinning reels is made with Okuma's C-40X long-strand carbon fiber technology. This not only makes the reel lighter, but also makes the reel extremely rigid which reduces twist and torque and keeps the internal parts in perfect alignment.

HELIOS SX SPINNING

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
Regular Speed											
HSX-20	5.0:1	8+1	180	60.7	3	0.15/240, 0.20/140, 0.25/90	C-40X	C-40X	C-40X	AL	129.00
HSX-30	5.0:1	8+1	202	68.6	6	0.20/300, 0.25/200, 0.30/130	C-40X	C-40X	C-40X	AL	139.00
HSX-40	5.0:1	8+1	262	76.2	6	0.25/260, 0.30/180, 0.35/130	C-40X	C-40X	C-40X	AL	149.00
High Speed											
HSX-40S	5.8:1	8+1	260	91.2	6	0.25/260, 0.30/180, 0.35/130	C-40X	C-40X	C-40X	AL	149.00

Inspira

INSPIRA SPINNING REELS FEATURE:

- Light weight C-40X carbon frame and sideplates
- 8BB + 1RB stainless steel bearings
- Quick-Set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Rigid, forged aluminum, anodized handle
- Light weight, EVA handle knobs for comfort
- Precision Elliptical Gearing system
- Machined aluminum, 2-tone anodized spool
- Heavy duty, solid aluminum bail wire
- CFR: Cyclonic Flow Rotor



ISX-40B

INSPIRA

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
Inspira Blue version with C-40X finish											
ISX-20B	5.0:1	8+1	182	60.7	3	0.15/240, 0.20/140, 0.25/90	C-40X	C-40X	GR	AL	99.00
ISX-30B	5.0:1	8+1	213	68.6	6	0.20/300, 0.25/200, 0.30/130	C-40X	C-40X	GR	AL	104.00
ISX-40B	5.0:1	8+1	268	76.2	6	0.25/260, 0.30/180, 0.35/130	C-40X	C-40X	GR	AL	109.00






TORSION CONTROL ARMOR DOMINATE WITH POWER

Okuma's Torsion Control Armor (TCA) is a breakthrough in reel design that provides a stronger, more durable, reel construction. TCA technology offers maximum stability by eliminating reel stem twisting and keeping gears aligned; giving the confidence you need in fighting the fish of a lifetime.

Strengthen Against Weak Points

While traditional spinning body designs utilize single-side support, Torsion Control Armor uses a durable double-arm design to help decrease pressure from weak areas and body twisting points.

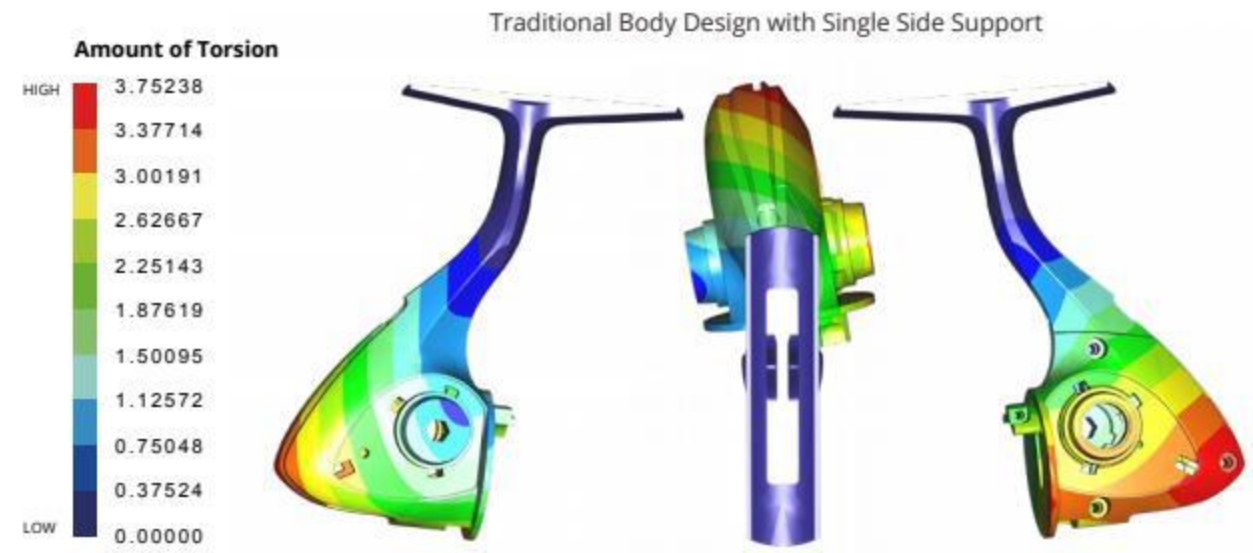

INSPIRED BY POWER

MACHINED ALUMINUM SCREW IN HANDLE DESIGN WITH TGT GRIP

The machined aluminum handle screws directly into the reel for the ultimate in a direct and secure connection.
(TGT: Traction Grip Technology)

LIGHTWEIGHT AND RIGID C-40X CARBON TCA AND ROTOR

The lightweight and rigid C-40X long strand carbon fiber is featured in TCA and rotor to give and provide extra strength where it is needed the most.



ITX

ITX CARBON SPINNING REELS FEATURE:

- Lightweight and rigid C-40X carbon TCA and rotor
- Multi-disc, carbon fiber drag system with Hydro Block gasket
- 7HPB + 1RB High Performance, grease packed bearings
- Quick-Set anti-reverse roller bearing
- CFR: Cyclonic Flow Rotor Technology
- Machined aluminum screw in handle design
- TGT Grip: Traction Grip Technology
- High speed on all models
- Precision machine cut brass pinion gear
- Machined aluminum, 2-tone anodized aluminum spool
- Heavy duty, solid aluminum bail wire
- RESil: Computer balanced Rotor Equalization System



ITX-3000H

ITX CARBON



Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
High Speed											
ITX-1000H	5.8:1	7+1	200	73	3	0.15/250, 0.20/140, 0.25/90	GR	GR	C-40X	AL	104.90
ITX-2500H	6.0:1	7+1	235	85	8	0.20/250, 0.25/165, 0.30/110	GR	GR	C-40X	AL	109.90
ITX-3000H	6.0:1	7+1	235	85	8	0.20/300, 0.25/200, 0.30/130	GR	GR	C-40X	AL	114.90
ITX-4000H	6.0:1	7+1	285	94	10	0.25/260, 0.30/180, 0.35/130	GR	GR	C-40X	AL	119.90
Regular Speed											
ITX-1000	5.0:1	7+1	200	61	3	0.15/250, 0.20/140, 0.25/90	GR	GR	C-40X	AL	104.90
ITX-2500	5.0:1	7+1	235	69	8	0.20/250, 0.25/165, 0.30/110	GR	GR	C-40X	AL	109.90
ITX-3000	5.0:1	7+1	235	69	8	0.20/300, 0.25/200, 0.30/130	GR	GR	C-40X	AL	114.90
ITX-4000	5.0:1	7+1	285	76	10	0.25/260, 0.30/180, 0.35/130	GR	GR	C-40X	AL	119.90

EPIXOR XT

EPIXOR XT SPINNING REELS FEATURE:

- TCA: C40x carbon Torsion Control Armor reduces twisting
- Multi-disc, Japanese oiled felt drag washers
- 7BB+1RB stainless steel bearings
- Quick-Set ant-reverse bearing
- Precision machine cut brass pinion gear
- Slow oscillation system for improved line lay
- Corrosion resistant graphite body and rotor
- CFR: Cyclonic Flow Rotor technology
- Rigid metal handle design for strength
- Machined aluminum, 2-tone anodized spool with LCS lip
- Heavy duty solid aluminum bail wire
- RESII: Computer balanced Rotor Equalizing System



EPXT-30



EPIXOR XT

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
EPXT-20	5.0:1	7+1	208	61	5	0.15/250, 0.20/140, 0.25/90	C-40X	GR	GR	AL	73.90
EPXT-30	5.0:1	7+1	249	69	8	0.20/300, 0.25/200, 0.30/130	C-40X	GR	GR	AL	79.90
EPXT-40	5.0:1	7+1	304	76	10	0.25/260, 0.30/180, 0.35/130	C-40X	GR	GR	AL	86.90
EPXT-55	5.0:1	7+1	316	87	12	0.30/300, 0.35/220, 0.40/170	C-40X	GR	GR	AL	92.90
High Speed											
EPXT-30S	6.0:1	7+1	255	85	8	0.20/300, 0.25/200, 0.30/130	C-40X	GR	GR	AL	79.90
EPXT-40S	6.0:1	7+1	310	94	10	0.25/260, 0.30/180, 0.35/130	C-40X	GR	GR	AL	86.90

EPIXOR LS

EPIXOR LS SPINNING REELS FEATURE:

- TCA: C40x carbon Torsion Control Armor reduces twisting
- Multi-disc, Japanese oiled felt drag washers
- 5BB+1RB stainless steel bearings
- Quick-Set ant-reverse bearing
- Precision machine cut brass pinion gear
- Slow oscillation system for improved line lay
- Corrosion resistant graphite body and rotor
- CFR: Cyclonic Flow Rotor technology
- Rigid metal handle design for strength
- Machined aluminum, 2-tone anodized spool with LCS lip
- Heavy duty solid aluminum bail wire
- RESII: Computer balanced Rotor Equalizing System



EPL-30



EPIXOR LS

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
EPL-20	5.0:1	5+1	216	61	5	0.15/250, 0.20/140, 0.25/90	C-40X	GR	GR	AL	69.00
EPL-30	5.0:1	5+1	258	69	8	0.2/300, 0.25/200, 0.3/130	C-40X	GR	GR	AL	75.00
EPL-40	5.0:1	5+1	315	76	10	0.25/260, 0.30/180, 0.35/130	C-40X	GR	GR	AL	82.00
EPL-55	5.0:1	5+1	327	87	12	0.30/300, 0.35/220, 0.40/170	C-40X	GR	GR	AL	87.00
High-speed spinning reels											
EPL-30S	6.0:1	5+1	264	85	8	0.20/300, 0.25/200, 0.30/130	C-40X	GR	GR	AL	75.00
EPL-40S	6.0:1	5+1	320	94	10	0.25/260, 0.30/180, 0.35/130	C-40X	GR	GR	AL	82.00

Ceymar XT

CETMAR XT REELS FEATURE:

- Multi-disc, Japanese oiled felt drag system
- 7BB+1RB for ultimate smoothness, 6BB+1RB on size 10
- Quick-Set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Corrosion-resistant graphite body
- Rigid, forged zinc, black anodized handle design
- Light weight, TPE handle knobs for comfort
- Precision Elliptical Gearing system

- Machined aluminum, 2-tone anodized spool
- Heavy duty, solid aluminum bail wire
- RESII: Computer balanced Rotor Equalizing System
- Line control system on the spool for better line casting
- Alum handle with EVA knob
- Plastic line clip
- Spare aluminum spool



CXT-40



CXTR-40

CEYMAR XT

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
Front Drag												
CXT-10FD	5.0:1	6+1	170	55.4	3	0.10/260, 0.14/150, 0.16/115	GR	GR	GR	AL	AL	55.90
CXT-20	5.0:1	6+1	196	61	3	0.15/250, 0.20/140, 0.25/90	GR	GR	GR	AL	AL	56.90
CXT-25FD	5.0:1	7+1	227	65.5	7	0.15/295, 0.20/170, 0.25/110	GR	GR	GR	AL	AL	57.90
CXT-30FD	5.0:1	7+1	232	65.5	7	0.20/200, 0.25/130, 0.30/100	GR	GR	GR	AL	AL	59.90
CXT-35FD	5.0:1	7+1	269	76.2	8	0.25/195, 0.30/135, 0.35/100	GR	GR	GR	AL	AL	61.90
CXT-40FD	5.0:1	7+1	283	76.2	8	0.25/240, 0.30/170, 0.35/125	GR	GR	GR	AL	AL	63.90
CXT-55FD	4.5:1	7+1	403	79.0	15	0.30/325, 0.35/240, 0.40/185	GR	GR	GR	AL	AL	74.90
CXT-65FD	4.8:1	7+1	586	97.3	16	0.35/340, 0.40/265, 0.50/160	GR	GR	GR	AL	AL	92.90
Rear Drag												
CXTR-30	5.0:1	7+1	232	65.5	7	0.20/200, 0.25/130, 0.30/100	GR	GR	GR	AL	AL	59.90
CXTR-40	5.0:1	7+1	283	76.2	8	0.25/240, 0.30/170, 0.35/125	GR	GR	GR	AL	AL	63.90



Ceymar TG

CEYMAR TACTICAL GREEN REELS FEATURE:

- Multi-disc, carbon fiber drag washers
- 7BB + 1RB for ultimate smoothness
- Quick-Set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Corrosion resistant body, sideplate and rotor
- CFR: Cyclonic Flow Rotor technology
- On/Off auto trip baitfeeding system on TGF models
- Rigid, metal handle design for maximum stability
- Lightweight, EVA handle knobs for comfort
- Precision Elliptical Gearing system
- Machined aluminum, anodized spool
- Heavy duty, solid aluminum bail wire
- RESII: Computer balanced Rotor Equalizing System
- Ceymar TG reels are backed by a 1-year limited warranty



TG-4000

CEYMAR TG

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
Ceymar TG Spinning Reels											
TG-500	5.0:1	6BB+1RB	170	61	4	0.15/145, 0.20/80, 0.25/50	GR	GR	SMA	AL	54.90
TG-1000	5.0:1	6BB+1RB	190	66	5	0.15/250, 0.20/140, 0.25/90	GR	GR	SN	AL	56.90
TG-3000	5.0:1	7BB +1RB	232	66	9	0.20/265, 0.25/170, 0.30/115	GR	GR	SMA	AL	59.90
TG-4000	5.0:1	7BB +1RB	283	76	9	0.25/260, 0.30/180, 0.35/135	GR	GR	SMA	AL	63.90



AVENGER

AVENGER REELS FEATURE:

- Multi-disc, Japanese oiled felt drag system
- 6BB + 1RB for ultimate smoothness and performance
- Quick-Set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Corrosion resistant graphite body and rotor
- CFR: Cyclonic Flow Rotor technology
- Precision Elliptical Gearing system



AV-3000



AV-8000

AVENGER

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force(kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
Avenger Spinning Reels											
AV-500a	5.0:1	6+1	175	55	3	0.15/145, 0.20/80, 0.25/50	GR	GR	GR	AL	44.00
AV-1000a	5.0:1	6+1	195	61	3	0.15/250, 0.20/140, 0.25/90	GR	GR	GR	AL	45.00
AV-2500	5.0:1	6+1	224	66	7	0.20/230, 0.25/150, 0.30/105	GR	GR	GR	AL	46.00
AV-3000	5.0:1	6+1	220	66	7	0.20/265, 0.25/170, 0.30/115	GR	GR	GR	AL	47.00
AV-4000	5.0:1	6+1	283	76	8	0.25/260, 0.30/180, 0.35/135	GR	GR	GR	AL	49.00
AV-6000	4.5:1	6+1	400	79	15	0.30/275, 0.35/200, 0.40/155	GR	GR	GR	AL	59.00
AV-8000	4.8:1	6+1	572	97	16	0.40/210, 0.45/165, 0.50/135	GR	GR	GR	AL	67.00
AV-10000	4.8:1	6+1	557	97	16	0.40/255, 0.45/200, 0.50/165	GR	GR	GR	AL	68.00
AV-14000	4.8:1	6+1	600	109	16	0.40/370, 0.45/290, 0.50/230	GR	GR	GR	AL	69.00



TOMCAT

TOMCAT REELS FEATURE:

- Corrosion-resistant graphite body
- 6 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Machine cut brass pinion
- Precision elliptical oscillation
- Multi-disc, Japanese oiled felt drag washers
- DFD : Dual Force Drag on size 14000
- RES II : Computer balanced Rotor Equalizing System
- Design rigid handle
- TPE Ergo grip handle knob
- 2 tones aluminum spool
- Metal round line clip



TOMCAT

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force(kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
TMC-3000	5.0:1	6+1	236	66	7	0.20/265, 0.25/170, 0.30/115	GR	GR	GR	AL	47.90
TMC-4000	5.0:1	6+1	301	76	8	0.25/260, 0.30/180, 0.35/135	GR	GR	GR	AL	49.90
TMC-6000	4.5:1	6+1	445	79	15	0.30/275, 0.35/200, 0.40/155	GR	GR	GR	AL	58.90
TMC-8000	4.8:1	6+1	631	97	16	0.40/210, 0.45/165, 0.50/135	GR	GR	GR	AL	77.90
TMC-14000	4.8:1	6+1	687	109	18 (DFD)	0.40/370, 0.45/290, 0.50/230	GR	GR	GR	AL	87.90
TMC-16000	4.8:1	6+1	668	109	16	0.40/420, 0.45/335, 0.50/270	GR	GR	GR	AL	89.90

SCORPIO

SCORPIO REELS FEATURE:

- Corrosion-resistant graphite body
- Exclusive metal black and purple paint
- 4 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- CFR : Cyclonic Flow Rotor
- Machine cut aluminum spool
- Graphite spare spool
- Smooth spool neck surface
- Zinc handle TPE flat knob
- Precision Elliptical Gearing System
- Machined cut brass pinion gear
- Gunsmoke anodized bail
- RESII: Computer-balanced rotor system
- Even Flow line roller
- Multi-disc, Japanese oiled felt drag system



SCORPIO

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force(kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
SP1000S-A	5.0:1	4+1	218	61	3	PE0.4(0.104)-100m / PE0.6(0.128)-60m PE0.8(0.148)-40m	GR	GR	GR	AL	49.90
SP1000-A	5.0:1	4+1	209	61	3	0.15/255, 0.20/140, 0.25/90	GR	GR	GR	AL	49.90
SP3000S-A	5.0:1	4+1	235	66	7	PE0.6(0.128)-210m / PE0.8(0.148)-150m PE1.0(0.165)-125m	GR	GR	GR	AL	52.90
SP3000-A	5.0:1	4+1	235	66	7	0.20/310, 0.25/200, 0.30/135	GR	GR	GR	AL	52.90
SP4000-A	5.0:1	4+1	302	76	8	0.25/280, 0.30/185, 0.35/130	GR	GR	GR	AL	55.90
SP5000-A	5.0:1	4+1	288	76	8	0.30/240, 0.35/170, 0.40/125	GR	GR	GR	AL	56.90
SP6000-A	4.5:1	4+1	432	79	15	0.30/315, 0.35/220, 0.40/165	GR	GR	GR	AL	59.90



TMC-14000



SP3000-A

SAFiNA PRO

SAFiNA PRO REELS FEATURE:

- Corrosion-resistant graphite body
- CFR : Cyclonic Flow Rotor
- 3 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Machine cut brass pinion
- ESII : Computer balanced Rotor Equalizing System
- Multi-disc, Japanese oiled felt drag washers
- T-shape handle knob from size 4000 and up
- Precision elliptical oscillation
- Design rigid handle
- 2 tones aluminum spool
- New graphite handle



SAFiNA PRO

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force(kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
SNP-2500	5.0:1	3+1	224	66	7	0.20/230, 0.25/150, 0.30/105	GR	GR	GR	AL	39.90
SNP-3000	5.0:1	3+1	219	66	7	0.20/265, 0.25/170, 0.30/115	GR	GR	GR	AL	42.90
SNP-4000	5.0:1	3+1	282	76	8	0.25/260, 0.30/180, 0.35/135	GR	GR	GR	AL	44.90
SNP-6000	4.5:1	3+1	410	79	15	0.30/275, 0.35/200, 0.40/155	GR	GR	GR	AL	49.90
SNP-8000	4.8:1	3+1	570	97	16	0.40/210, 0.45/165, 0.50/135	GR	GR	GR	AL	57.90
SNP-14000	4.8:1	3+1	599	109	16	0.40/370, 0.45/290, 0.50/230	GR	GR	GR	AL	59.90



SNP-4000

SAFiNA

SAFiNA REELS FEATURE:

- Corrosion-resistant graphite body
- CFR : Cyclonic Flow Rotor
- 1 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Machine cut brass pinion
- Precision elliptical oscillation
- ESII : Computer balanced Rotor Equalizing System
- Multi-disc, Japanese oiled felt drag washers
- T-shape handle knob from size 8000 and up
- 2 tones aluminum spool
- New graphite handle
- Design rigid handle



SAFiNA

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force(kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
SN-2500	5.0:1	1+1	221	66	7	0.20/230, 0.25/150, 0.30/105	GR	GR	GR	AL	26.90
SN-3000	5.0:1	1+1	217	66	7	0.20/265, 0.25/170, 0.30/115	GR	GR	GR	AL	27.90
SN-4000	5.0:1	1+1	281	76	8	0.25/260, 0.30/180, 0.35/135	GR	GR	GR	AL	31.90
SN-6000	4.5:1	1+1	398	79	15	0.30/275, 0.35/200, 0.40/155	GR	GR	GR	AL	34.90
SN-8000	4.8:1	1+1	570	97	16	0.40/210, 0.45/165, 0.50/135	GR	GR	GR	AL	43.90
SN-14000	4.8:1	1+1	598	109	16	0.40/370, 0.45/290, 0.50/230	GR	GR	GR	AL	45.90



SN-3000

SOLARIS

SOLARIS REELS FEATURE:

- Corrosion-resistant graphite body
- 5 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- Aluminum black spool with blue anodizing
- Zink handle
- EVA knob 3000, Flat TPE knob C4000, TPE T-shape 5000/6000
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Even Flow line roller



SOLARIS

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
SLS-3000	5.0:1	5+1	240	71	7	0.20/300, 0.25/200, 0.30/130	GR	GR	GR	AL	39.90
SLS-C4000	5.0:1	5+1	260	85	8	0.25/260, 0.30/180, 0.35/130	GR	GR	GR	AL	42.90
SLS-5000	5.0:1	5+1	295	79	9	0.30/240, 0.35/170, 0.40/125	GR	GR	GR	AL	44.90
SLS-6000	4.5:1	5+1	430	83	14	0.30/300, 0.35/220, 0.40/170	GR	GR	GR	AL	54.90



SLS-3000

JAW

JAW REELS FEATURE:

- Multi-disc, Japanese oiled felt drag washers
- 3 ball bearing+1 roller bearing
- Precision machine cut brass pinion gear
- Corrosion resistant graphite body and rotor
- Machined aluminum, anodized spool
- Corrosion-resistant stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System



JAW

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
JAW-20	4.8:1	3+1	199	61	5	0.15/250, 0.20/140, 0.25/90	GR	GR	GR	AL	34.90
JAW-30	5.0:1	3+1	233	71	7	0.20/300, 0.25/200, 0.30/130	GR	GR	GR	AL	37.90
JAW-40	5.0:1	3+1	259	85	8	0.25/260, 0.30/180, 0.35/130	GR	GR	GR	AL	39.90
JAW-45	5.0:1	3+1	290	79	9	0.30/240, 0.35/170, 0.40/125	GR	GR	GR	AL	44.90
JAW-55	4.5:1	3+1	422	83	14	0.30/300, 0.35/220, 0.40/170	GR	GR	GR	AL	49.90



JAW-30

ALTERA

ALTERA REELS FEATURE:

- Corrosion-resistant graphite body
- 3 ball bearing + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Machine cut brass pinion gear
- Machine cut 2 tone anodized aluminum spool
- RES II : Computer balanced Rotor Equalizing System
- Rigid metal handle
- TPE handle knob (T-shape on size 55 & 65)
- Multi-disc, Japanese oiled felt drag washers



ALTERA

Model	Gear ratio	Bearings	Weight (g)	Line retrieve(cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
ATE-20	4.8:1	3+1	203	61	5	0.15/250, 0.20/140, 0.25/90	GR	GR	GR	AL	34.90
ATE-30	5.0:1	3+1	240	71	7	0.20/300, 0.25/200, 0.30/130	GR	GR	GR	AL	36.90
ATE-40	5.0:1	3+1	260	85	8	0.25/260, 0.30/180, 0.35/130	GR	GR	GR	AL	39.90
ATE-45	5.0:1	3+1	295	79	9	0.30/240, 0.35/170, 0.40/125	GR	GR	GR	AL	44.90
ATE-55	4.5:1	3+1	430	83	14	0.30/300, 0.35/220, 0.40/170	GR	GR	GR	AL	52.90
ATE-65	4.5:1	3+1	430	87	14	0.40/220, 0.45/170, 0.50/140	GR	GR	GR	AL	54.90



ALARIS

ALARIS REELS FEATURE:

- Multi-disc, Japanese oiled felt drag washers
- 3 ball bearing + 1 roller bearing
- Quick-Set anti-reverse bearing
- Precision machine cut brass pinion gear
- Corrosion resistant graphite body and rotor
- Rigid metal handle design for strength
- Machined aluminum, 2-tone anodized spool with LCS lip
- Corrosion-resistant stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System



ALARIS

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
Standard speed spinning reels											
ALS-20	4.8:1	3+1	204	61	5	0.15/250, 0.20/140, 0.25/90	GR	GR	GR	AL	34.90
ALS-30	5.0:1	3+1	237	71	7	0.20/300, 0.25/200, 0.30/130	GR	GR	GR	AL	36.90
ALS-40	5.0:1	3+1	260	85	8	0.25/260, 0.30/180, 0.35/130	GR	GR	GR	AL	39.90
ALS-45	5.0:1	3+1	295	79	9	0.30/240, 0.35/170, 0.40/125	GR	GR	GR	AL	44.90
ALS-55	4.5:1	3+1	422	83	14	0.30/300, 0.35/220, 0.40/170	GR	GR	GR	AL	52.90
ALS-65	4.5:1	3+1	427	87	14	0.40/220, 0.45/170, 0.50/140	GR	GR	GR	AL	54.90

Model: ALS-40 Wide Rotor



AZAKI

AZAKI REELS FEATURE:

- Corrosion-resistant graphite body
- 1 ball bearing + 1 roller bearing
- Quick-Set infinite anti-reverse system
- RES II : Computer balanced Rotor Equalizing System
- Design graphite handle
- ABS handle knob (T-shape on size 55 & 65)
- Multi-disc, Japanese oiled felt drag washers
- Machine cut brass pinion
- Aluminum spool



AZAKI

Model	Gear ratio	Bearings	Weight (g)	Line retrieve(cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
Azaki-20	4.8:1	1+1	187	61	5	0.15/250, 0.20/140, 0.25/90	GR	GR	GR	AL	24.90
Azaki-30	5.0:1	1+1	216	71	7	0.20/300, 0.25/200, 0.30/130	GR	GR	GR	AL	26.90
Azaki-40	5.0:1	1+1	242	85	8	0.25/260, 0.30/180, 0.35/130	GR	GR	GR	AL	29.90
Azaki-45	5.0:1	1+1	274	79	9	0.30/240, 0.35/170, 0.40/125	GR	GR	GR	AL	33.90
Azaki-55	4.5:1	1+1	404	83	14	0.30/300, 0.35/220, 0.40/170	GR	GR	GR	AL	37.90
Azaki-65	4.5:1	1+1	405	87	14	0.40/220, 0.45/170, 0.50/140	GR	GR	GR	AL	39.90
Azaki-30/40 Winded with Braided Line											
Azaki-30 braided	5.0:1	1+1	226	71	7	0.20/300, 0.25/200, 0.30/130	GR	GR	GR	AL	35.90
Azaki-40 braided	5.0:1	1+1	257	85	8	0.25/260, 0.30/180, 0.35/130	GR	GR	GR	AL	39.90



Azaki-40

Pink Pearl V2

PINK PEARL V2 REELS FEATURE:

- Corrosion resistant graphite body and rotor
- 1+1 ball bearing
- Quick-set anti-reverse roller bearing
- Aluminum 2 tones anodized spool
- Multi-disc, Japanese oiled felt drag washers
- RESII: Computer balanced Rotor Equalizing System
- TPE soft touch handle knob



PINK PEARL V2

Model	Gear ratio	Bearings	Weight (g)	Line retrieve(cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
PP2-3000	5.0:1	1+1	216	71	7	0.20/300, 0.25/200, 0.30/130	GR	GR	GR	AL	29.90



PP2-3000

Carbonite

CARBONITE RD FEATURE:

- Corrosion resistant graphite body and rotor
- 1+1 ball bearing
- Quick-set anti-reverse roller bearing
- Graphite spool
- CFR: Cyclonic Flow Rotor technology
- RESII: Computer balanced Rotor Equalizing System
- TPE handle knob



CR-2500

CARBONITE RD

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
CR-2500	5.0:1	1+1	218	66	4	0.20/255, 0.25/170, 0.30/110	GR	GR	GR	GR	29.90
CR-4000	5.0:1	1+1	268	76	6	0.25/250, 0.30/170, 0.35/130	GR	GR	GR	GR	32.90

REVENGER PRO

REVENGER PRO REELS FEATURE:

- Multi-disc, oiled felt drag system
- 1 ball bearing for ultimate smoothness
- Multi-stop anti-reverse system
- Machined aluminum, anodized spool
- Corrosion-resistant graphite body
- Rigid aluminum handle arm for strength
- Corrosion-resistant, stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System



RVP-30

REVENGER PRO

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
RVP-30	5.0:1	1	220	64.5	5	0.20/220, 0.25/140, 0.30/100	GR	GR	GR	AL	23.90
RVP-40	5.0:1	1	260	76.2	5	0.25/270, 0.30/190, 0.35/140	GR	GR	GR	AL	25.90
RVP-55	4.5:1	1	365	76.2	9	0.30/390, 0.35/285, 0.40/220	GR	GR	GR	AL	29.90
RVP-65	4.8:1	1	560	94.0	11	0.35/360, 0.40/280, 0.50/170	GR	GR	GR	AL	37.90
RVP-80	4.8:1	1	586	104.1	12	0.45/280, 0.50/225, 0.55/190	GR	GR	GR	AL	39.90

REVENGER

REVENGER REELS FEATURE:

- Multi-disc, oiled felt drag system
- 1 ball bearing for ultimate smoothness
- Multi-stop anti-reverse system
- Graphite spool
- Corrosion-resistant graphite body
- Corrosion-resistant, stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System



RV-25

REVENGER

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
RV-30	5.0:1	1	215	64.5	5	0.20/220, 0.25/140, 0.30/100	GR	GR	GR	GR	15.90
RV-40	5.0:1	1	250	76.2	5	0.25/270, 0.30/190, 0.35/140	GR	GR	GR	GR	17.90
RV-55	4.5:1	1	365	76.2	9	0.30/390, 0.35/285, 0.40/220	GR	GR	GR	GR	19.90
RV-65	4.8:1	1	560	94.0	11	0.35/360, 0.40/280, 0.50/170	GR	GR	GR	GR	24.90

CASCADE

CASCADE REELS FEATURES:

- Multi-disc, oiled felt drag system
- 1 ball bearing for ultimate smoothness
- Multi-stop anti-reverse system
- Silver electroplated ABS spool
- Corrosion-resistant graphite body
- Corrosion-resistant, stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System



CA-25

CASCADE

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
CA-25	5.0:1	1	215	64.5	3	0.15/320, 0.20/190, 0.25/120	GR	GR	GR	GR	14.90
CA-30	5.0:1	1	215	64.5	5	0.20/220, 0.25/140, 0.30/100	GR	GR	GR	GR	15.90
CA-40	5.0:1	1	250	76.2	5	0.25/270, 0.30/190, 0.35/140	GR	GR	GR	GR	16.90
CA-55	4.5:1	1	365	76.2	9	0.30/390, 0.35/285, 0.40/220	GR	GR	GR	GR	19.90
CA-65	4.8:1	1	560	94.0	11	0.35/360, 0.40/280, 0.50/170	GR	GR	GR	GR	24.90
CA-80	4.8:1	1	586	104.1	12	0.45/280, 0.50/225, 0.55/190	GR	GR	GR	GR	26.90

ARIA "A"

ARIA "A" REELS FEATURE:

- Multi-disc, oiled felt drag washers
- 1 ball bearing drive for smoothness and durability
- Precision machine cut brass pinion gear
- Corrosion resistant body and rotor
- CFR: Cyclonic Flow Rotor technology
- Machined aluminum, anodized spool
- Corrosion-resistant stainless steel ball wire
- RESII: Computer balanced Rotor Equalizing System
- Aria reels are backed by a 1-year limited warranty



ARIA-3000a



ARIA

	Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Line Capacity	Frame	Sideplates	Rotor	Spool	MSRP (€)
	ARIA											
NEW	ARIA-1000a	4.8:1	1 BB	183	61	5	0.15/250, 0.20/140, 0.25/90	GR	GR	GR	AL	21.00
NEW	ARIA-3000a	5.0:1	1 BB	220	71	7	0.20/300, 0.25/200, 0.30/130	GR	GR	GR	AL	23.00
NEW	ARIA-C4000a	5.0:1	1 BB	234	85	8	0.25/260, 0.30/180, 0.35/130	GR	GR	GR	AL	26.00
NEW	ARIA-5000a	5.0:1	1 BB	266	79	9	0.30/240, 0.35/170, 0.40/125	GR	GR	GR	AL	29.00
NEW	ARIA-6000a	4.5:1	1 BB	375	83	14	0.30/300, 0.35/220, 0.40/170	GR	GR	GR	AL	33.00
NEW	ARIA-8000a	4.5:1	1 BB	380	87	14	0.40/220, 0.45/170, 0.50/140	GR	GR	GR	AL	35.00

ELECTRON

ELECTRON REELS FEATURE:

- Graphite body and rotor.
- 1 ball bearing drive.
- Graphite main and spare spool.
- Smooth front drag system.
- Free line included.



Electron RD



Electron FD

ELECTRON

	Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
	Electron FD												
	ELC-165	4.8:1	1 BB	495	91 cm	N/A	0.35/410 0.40/320 0.50/200	GR	GR	GR	GR	GR	27.90
	ELC-180	4.8:1	1 BB	525	102 cm	N/A	0.45/320 0.50/260 0.55/220	GR	GR	GR	GR	GR	29.90
	Electron RD												
	ELR-130	5.0:1	1 BB	220	59	3.0	0.20/360 0.25/230 0.30/160	GR	GR	GR	GR	GR	17.90
	ELR-140	4.5:1	1 BB	245	58	5.0	0.30/270 0.35/200 0.40/150	GR	GR	GR	GR	GR	18.90
	ELR-150	4.5:1	1 BB	314	64	5.0	0.35/300 0.40/230 0.50/140	GR	GR	GR	GR	GR	19.90

SURF-8K

SURF 8K REELS FEATURE:

- Quick set anti reverse roller bearing
- Slow oscillation system
- Fast drag system
- Double stainless steel line clickers
- Precision worm shaft transmission system
- Rotor brake system
- Hydro block water tight drag seal
- With carbon washers
- Precision zinc handle arm with TPE ergo grip



SURF-8K

SURF 8K

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
SURF-8K	4.7:1	5+1	763	108	18	0.33/620, 0.35/550, 0.38/470	GR	GR	GR	AL	109.00

ROCKAWAY

ROCKAWAY REELS FEATURES:

- 4BB + 1RB stainless steel bearing system
- Quick-Set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Corrosion resistant frame, sideplate and rotor
- Rigid metal handle design to reduce flex
- Long cast, 2-tone anodized aluminum spool
- On/Off auto trip baitfeeding system on RBF models
- 5BB + 1RB stainless steel bearing system on RBF model



RA-6000

RBF-8000

ROCKAWAY

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
RA-6000	5.3:1	4+1 BB	486	104	12	0.30/370, 0.33/300, 0.35/270	GR	GR	GR	AL	84.90
NEW RA-8000	5.3:1	4+1 BB	531	123	16	0.33/440, 0.35/385, 0.38/320	GR	GR	GR	AL	89.00
ROCKAWAY Baitfeeder Reels											
NEW RBF-8000	5.3:1	5 + 1 BB	586	123	16	0.33/440, 0.35/385, 0.38/320	GR	GR	GR	AL	99.90

DISTANCE SURF ARENA

DISTANCE SURF ARENA REELS FEATURE:

- Slim Blade corrosion-resistant graphite body
- 3 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- Machine cut aluminum spool
- LCS : round metal line clip
- FPD : Fast Progressive Drag
- Rigid metal handle
- TPE T-Shape handle knob
- Worm Shaft transmission system
- Even Flow line roller
- Hydro block drag system



DSA-60

DISTANCE SURF ARENA

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
DSA-60	4.5:1	3+1	578	103	16	0.33/320, 0.35/280, 0.38/240	GR	GR	GR	AL	79.00
DSA-80	3.8:1	3+1	673	92	16	0.33/390, 0.35/345, 0.38/295	GR	GR	GR	AL	89.00

DISTANCE DTA

DISTANCE DTA REELS FEATURE:


- 3 +1RB stainless steel bearings
- Quick-Set anti-reverse roller bearing
- Machine cut anodizing alum spool
- Aluminum regular handle
- Hydro block system
- Even flow roller
- Worm shaft transmission system
- Metal line clip
- LCS line control spool



DTA-60

DISTANCE DTA

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
DTA-60	4.5:1	3+1	570	100.3	12	0.25/600, 0.30/420, 0.35/310, 0.40/240	GR	GR	GR	AL	79.00

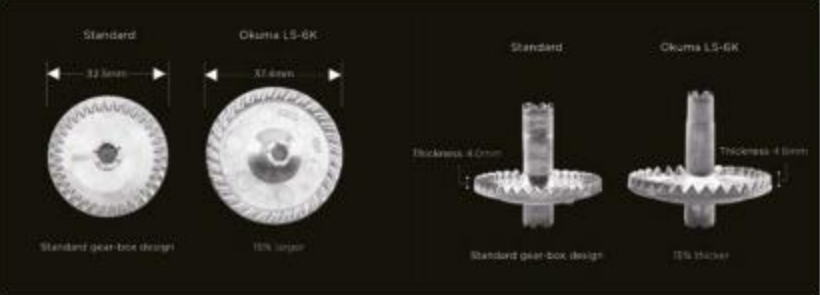

OVERSIZE GEAR

Okuma has redesigned the main transmission gear. Larger diameter + 15% and deeper teeth+15% for maximum power retrieve+30% Allows now high speed gear ratio for big line retrieve: 103cm

DOUBLE BALL BEARINGS PINION SUPPORT

Ultimate pinion stability for perfect main gear adjustment : super smooth gearing feeling and high durability.



LS

LS REELS FEATURE:

- Auto-switch freespool system
- Long Stroke spool trip 30mm
- Corrosion-resistant graphite body
- 5 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- Machine cut aluminum spool
- Worm shaft oscillation system
- Machined cut brass pinion gear
- Heavy duty, solid aluminum bail wire
- Precision zinc handle arm with wooden handle knob
- RESII: Computer-balanced rotor system
- Slow oscillation system for improved line lay
- 2 round metal line clips
- Rotor brake system
- Fast progressive drag
- Metal air bail nut



LS-6K



Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
LS-6K	5.3:1	5+1	530	104	12	0.30/370, 0.33/300, 0.35/270	GR	GR	GR	AL	99.90
LS-8K	5.3:1	5+1	588	123	16	0.33/440, 0.35/385, 0.38/320	GR	GR	GR	AL	109.90

FOR THOSE WHO APPRECIATE THE NATURE OF CARP

Carp's intelligent and sensitive behavior makes for an incomparable fishing experience. These fish require anglers to truly understand and admire their catch. At Okuma, we aim to help carp anglers enjoy this unique connection to nature.





8K

8K CARP REELS FEATURE:

- Quick set anti reverse roller bearing
- Slow oscillation system
- 5 ball bearing+1 roller bearing
- Fast drag system
- Double stainless steel line clickers
- Precision worm shaft transmission system
- Rotor brake system
- Hydro block water tight drag seal
- With carbon washers
- Precision zinc handle arm with wooden knob



8K

8K

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
8K	4.7:1	5+1	743	108	18	0.33/620, 0.35/550, 0.38/470	GR	GR	GR	AL	109.00



SLOW OSCILLATION SYSTEM

Makes the line wind more straight and tight, reduce the friction when casting. Uper Long Stroke Spool 45mm.



SUPER LONG STROKE SPOOL 45MM



FAST PROGRESSIVE DRAG

This fast progressive drag allows a setting from low drag power to almost full drag power in less than 360° rotation



SPARE ALUMINUM SHALLOW SPOOL (ON OPTION)



ROTOR WITH BRUSH GUARDS

Prevent line twist between rotor and main shaft effectively.




WORM SHAFT TRANSMISSION SYSTEM

8K equips upgraded worm shaft transmission system, strengthens the construction, let the reel more rigid, makes the line wind more straight and tight, working more smoothly.



ROTOR BRAKE SYSTEM

Prevent rotor to turn around and reverse when casting.

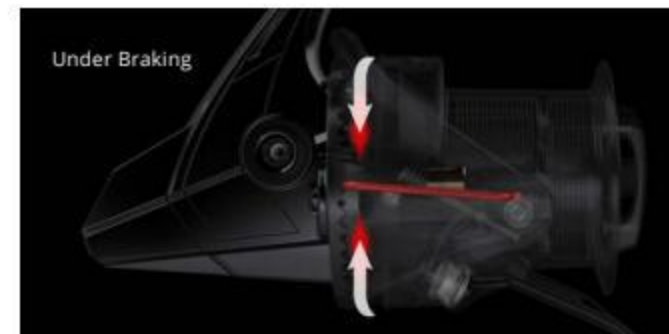

T-REX

T-REX SPINNING REELS FEATURE:

- SRS : Solid Reel System
- Crossover Construction design
- Quick-Set anti-reverse roller bearing
- Worm shaft transmission system
- Precision machine cut brass pinion gear
- LCS : Line Control Spool for longer casting distance
- Fast Progressive Drag System
- Multi disc, Japanese oiled felt drag system
- Forged aluminum handle with wooden knob
- Hydro Block water tight drag seal
- Heavy duty, solid aluminum, anodized bail wire
- RESII: Computer balanced Rotor Equalizing System
- Aluminum spool
- Round metal line clip



T-REX

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
TR-7000	4.5:1	6+1	616	102	12	0.33/370, 0.35/325, 0.38/270	AL/GR	GR	AL/GR	AL	119.00



TR-7000

CUSTOM BLACK

CUSTOM BLACK REELS FEATURE:

- 3 +1 stainless steel bearings
- Quick-Set anti-reverse roller bearing
- Machine cut anodizing alum spool
- Aluminum regular handle for CB-60/80; one touch handle for CB-60 QF
- Hydro block system
- Even flow roller
- Worm shaft transmission system
- LCS line control spool
- Metal line clip
- Spare graphite spool



CUSTOM BLACK

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
CB-60	4.5:1	3+1	570	102.9	12	0.25/515, 0.30/360, 0.35/270, 0.40/210	GR	GR	GR	AL	GR	69.90
CB-80	3.8:1	3+1	690	92.5	15	0.40/265, 0.45/210, 0.50/170, 0.55/135	GR	GR	GR	AL	GR	74.90



CB-60

BIG BOMBER SPOD

BIG BOMBER SPOD REELS FEATURE:

- Graphite body construction
- BBD : body blade design
- 3+1 ball bearings
- Quick-Set anti reverse roller bearing
- Machine cut anodized aluminum spool
- 2 round metal line-clips
- Hard metal handle
- TPE Ergo grip handle knob
- XXL Even flow roller
- Worm shaft transmission system
- FPD : Fast Progressive Drag System
- Heavy duty, solid aluminum, anodized bail wire
- RESII: Computer balanced Rotor Equalizing System



BIG BOMBER SPOD

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
BBS-7000S	4.5:1	3+1	618	103	12	0.20/410, 0.22/340, 0.25/270	GR	GR	GR	AL	99.00
BBS-8000S	5.1:1	3+1	720	128	16	0.20/410, 0.22/340, 0.25/270	GR	GR	GR	AL	89.00

(BBS-7000S With braided line)



BBS-8000S

INC

INC REELS FEATURES:

- Compact body
- Long Stroke spool 30mm
- Corrosion-resistant graphite body
- 3 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- Machine cut aluminum spool
- 2 round metal line clips
- Rigid metal handle with wooden knob
- Worm shaft oscillation system
- Machined cut brass pinion gear
- Heavy duty, solid aluminum bail wire
- RESII: Computer-balanced rotor system
- Even Flow line roller
- Rotor brake system
- Fast progressive drag



INC

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
INC-6000	5.3:1	3+1	460	104	12	0.30/370, 0.33/300, 0.35/270	GR	GR	GR	AL	79.90
INC-8000	5.3:1	3+1	533	123	16	0.33/440, 0.35/385, 0.38/320	GR	GR	GR	AL	84.90



INC-6000

CUSTOM CARP

CUSTOM CARP REEL FEATURE:

- Slim Blade corrosion-resistant graphite body
- 3 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- Machine cut aluminum spool
- Metal round line clip
- Graphite spare spool
- FPD : Fast Progressive Drag
- Quick folding alu handle
- Wooden handle knob
- Worm Shaft transmission system
- Even Flow line roller
- Hydro block drag system



CC-7000

CUSTOM CARP

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
CC-7000	4.5:1	3 + 1 BB	570	103	12 kg	270/0.35	GR	GR	GR	AL	74.00

CUSTOM

CUSTOM REELS FEATURE:

- Corrosion resistant graphite body and rotor
- 3 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Aluminum anodized spool
- Graphite spare spool
- CFR : Cyclonic Flow Rotor
- 2 round metal line clips
- Multi-disc, Japanese oiled felt drag washers
- RESII: Computer balanced Rotor Equalizing System
- EFR II : Even Flow Line Roller
- Soft touch ABS T-shape handle knob
- Spod version CS : Prespooled with 200m Braid 30 lbs



C-7000

CUSTOM

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
C-7000	4.8:1	3+1	622	107	16	0.33/370, 0.35/325, 0.38/270	GR	GR	GR	AL	GR	59.90

CUSTOM SPOD

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
CS-7000S	4.8:1	3+1	665	107	16	0.20/410, 0.22/340, 0.25/270	GR	GR	GR	AL	69.90

BOOSTER CARP

BOOSTER CARP REEL FEATURE:

- Corrosion resistant graphite body and rotor
- Multi-stop anti-reverse system
- Aluminum anodized spool
- Multi-disc, Japanese oiled felt drag washers
- RESII: Computer balanced Rotor Equalizing System
- EFR II : Even Flow Line Roller
- ABS T-shape handle knob



BT-7000

BOOSTER CARP

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
BT-7000	4.5:1	3BB	587	103	15	0.33/370, 0.35/325, 0.38/270	GR	GR	GR	AL	35.00

ATOMIC CARP

ATOMIC CARP REELS FEATURE:

- Corrosion resistant graphite body and rotor
- Multi-stop anti-reverse system
- Aluminum anodized spool
- Multi-disc, Japanese oiled felt drag washers
- RESII: Computer balanced Rotor Equalizing System
- EFR II : Even Flow Line Roller
- ABS T-shape handle knob



ATC-7000

ATOMIC CARP

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
ATC-7000	4.5:1	3	590	103	15	0.33/370, 0.35/325, 0.38/270	GR	GR	GR	AL	35.00

C-FIGHT

C-FIGHT SPINNING REEL FEATURE:

- Corrosion-resistant graphite body and rotor
- Exclusive Okuma black and grey camo covering
- 3 ball bearing + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Machine cut brass pinion gear
- Machine cut 2 tone anodized aluminum spool
- RES II : Computer balanced Rotor Equalizing System
- Rigid metal handle
- TPE T-shape handle knob
- Multi-disc, Japanese oiled felt drag washers



C-FIGHT

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
CF-6000	4.5:1	3+1	460	87	14	0.30/320, 0.35/225, 0.40/170	GR	GR	GR	AL	49.00



CF-6000

Custom Black Feeder

CUSTOM BLACK FEEDER FEATURE:

- Corrosion-resistant graphite body
- 7 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- CFR : Cyclonic Flow Rotor
- Machine cut Aluminum shallow spool
- Aluminum regular spare spool
- Rigid metal handle, EVA knob
- Precision Elliptical Gearing System
- Machined cut brass pinion gear
- Heavy duty, solid aluminum bail wire
- RESII : Computer-balanced rotor system
- Even Flow line roller
- Multi-disc, Japanese oiled felt drag system



CUSTOM BLACK FEEDER

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
CLX-40F	5.0:1	7+1	291	76	8	0.25/180, 0.28/140, 0.30/125	GR	GR	GR	AL	AL	63.90
CLX-55F	4.5:1	7+1	437	79	15	0.30/180, 0.33/150, 0.35/130	GR	GR	GR	AL	AL	73.90



CLX-55F

Coronado CDX

CORONADO CDX BAITFEEDER REELS FEATURE:

- On/Off auto trip bait feeding system
- DFD: Precision Dual Force Drag system
- Carbonite drag washers on Dual Force Drag
- Heavy duty, brass DFD and spool shaft stabilizer
- 4HPB+1RB corrosion resistant stainless steel bearings
- Quick-Set anti-reverse bearing allows for zero back play in handle
- CRC: Corrosion-Resistant Coasting process
- Machined aluminum, screw in handle system
- Slow oscillation system for improved line lay



CDX-60



CORONADO CDX

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Braided line rating (Tuf line)	Frame	Sideplates	Rotor	Spool	MSRP (€)
Standard speed spinning reels												
CDX-55	4.4 : 1	4+1	550	82.6	12.7	0.30/320, 0.35/230, 0.40/180	245/50	GR	GR	GR	AL	109.00
CDX-60	4.4 : 1	4+1	563	86.7	12.2	0.30/375, 0.35/275, 0.40/210	290/50	GR	GR	GR	AL	119.00
CDX-65	4.9 : 1	4+1	822	106.0	15.3	0.40/300, 0.45/235, 0.50/190	315/65	GR	GR	GR	AL	129.00
CDX-80	4.9 : 1	4+1	855	115.3	17	0.40/380, 0.45/300, 0.50/240	235/80	GR	GR	GR	AL	139.00

Aventa

AVENTA BAITFEEDER REELS FEATURE:

- On/Off auto trip bait feeding system
- 6+1RB bearing drive system for smoothness
- Quick set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Corrosion resistant graphite body
- Slow oscillation precision gearing system
- Machined aluminum spool
- One touch handle with wood knob
- Spare aluminum spool
- Metal line clip
- LCS Line control spool



AB-5000



AVENTA BF

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
AB-5000	4.8:1	6+1	527	68.6	12	0.35/235, 0.40/180, 0.50/110	GR	GR	GR	AL	AL	79.90
AB-6000	4.8:1	6+1	533	71.1	12	0.35/280, 0.40/215, 0.50/135	GR	GR	GR	AL	AL	84.90
AB-8000	4.8:1	6+1	763	78.7	15	0.35/405, 0.40/311, 0.50/190	GR	GR	GR	AL	AL	94.90
AB-10000	4.8:1	6+1	778	86.4	15	0.45/310, 0.50/250, 0.55/210	GR	GR	GR	AL	AL	99.90

TOMCAT

TOMCAT BAITFEEDER REELS FEATURE:

- Auto-switch freespool system
- Largest line capacity Okuma freespool reel
- Designed for Catfish fishing
- Corrosion-resistant graphite body
- 5 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- S-curve oscillation system
- 2 tones machine cut aluminum spool
- Gunsmoke anodized bail
- Multi-disc, Japanese oiled felt drag washers
- Rigid metal handle
- TPE ergo grip handle knob
- Machine cut brass pinion



TOMCAT BAITFEEDER

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
TCBF-18000	4.5:1	5+1	820	106	10	0.50/320, 0.55/260, 0.60/215	GR	GR	GR	AL	82.00



TCBF-18000

AVENGER ABF

AVENGER ABF REELS FEATURE:

- On/Off auto trip bait feeding system
- Multi-disc, Japanese oiled felt drag system
- 6BB + 1RB stainless steel bearing system
- Corrosion resistant frame, sideplate and rotor
- Rigid metal handle design to reduce flex
- RESII: Computer balanced Rotor Equalizing System
- Machined aluminum, 2-tone anodized spool
- Quick-Set anti-reverse roller bearing
- CFR: Cyclonic Flow Rotor technology
- Precision machine cut brass pinion gear



AVENGER BF

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
ABF-1000	5.0:1	6+1	234	61	3	0.15/250, 0.20/140, 0.25/90	GR	GR	GR	AL	59.00 €
ABF-3000	5.0:1	6+1	285	71	8	0.20/310, 0.25/200, 0.30/135	GR	GR	GR	AL	62.00 €
ABF-4000	5.0:1	6+1	331	79	10	0.25/285, 0.3/190, 0.35/130	GR	GR	GR	AL	65.00 €
ABF-6000	4.5:1	6+1	483	80	12	0.30/320, 0.35/225, 0.40/170	GR	GR	GR	AL	69.00 €
ABF-8000	4.5:1	6+1	503	87	12	0.40/230, 0.45/180, 0.50/140	GR	GR	GR	AL	73.00 €



ABF-1000

Ceymar

CEYMAR BAITFEEDER REELS FEATURE:

- Baitfeeder quick release Aluminum spool
- Multi-disc, oiled felt drag system
- RESII: Computer balanced Rotor Equalizing System
- 2+1BB bearing drive system
- Quick-Set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Corrosion-resistant graphite body
- Light weight, ABS handle knobs
- Precision Elliptical Gearing system
- Machined aluminum, anodized spool
- Metal line clip
- LCS line control spool
- Extra graphite spool



CMBF-355



CEYMAR BF

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
CMBF-330	5.0:1	2+1	232	63.5	3	0.20/240, 0.25/155, 0.30/110	GR	GR	GR	AL	GR	46.00
CMBF-340	5.0:1	2+1	283	73.7	6	0.25/300, 0.30/210, 0.35/155	GR	GR	GR	AL	GR	49.00
CMBF-355	4.5:1	2+1	403	76.2	9	0.30/380, 0.35/280, 0.40/215	GR	GR	GR	AL	GR	53.00
CMBF-365	4.8:1	2+1	586	91.4	11	0.35/390, 0.40/300, 0.50/185	GR	GR	GR	AL	GR	57.00

LongBow

LongBow REELS FEATURE:

- 1 one-way roller bearing
- Micro adjustable bait feeder drag system
- Aluminium spool
- RES system
- One touch handle with wooden handle knob
- Graphite spare spool
- Oversized gearing
- Patented bait feeder lever clutch system



LB-650 x-spl

LongBow

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
w/ graphite spare spool												
LB-640 x-spl	4.5:1	5+1BB	480g	71,1	9	dia 0.30 /180m	GR	GR	GR	AL	GR	67.00
LB-650 x-spl	4.5:1	5+1BB	515g	76,2	11	dia 0.35 /180m	GR	GR	GR	AL	GR	69.00
LB-660 x-spl	4.5:1	5+1BB	500g	-	11	dia 0.40 /240m	GR	GR	GR	AL	GR	72.00
LB-665 x-spl	4.5:1	5+1BB	775g	86,4	14	dia 0.45 /190m	GR	GR	GR	AL	GR	83.00
LB-680 x-spl	4.5:1	5+1BB	790g	96,5	15	dia 0.50 /270m	GR	GR	GR	AL	GR	85.00
LB-690 x-spl	4.5:1	5+1BB	805g	-	15	dia 0.50 /200m	GR	GR	GR	AL	GR	87.00

LongBow XT

LongBow XT BAITFEEDER REELS FEATURE:

- On/Off auto trip bait feeding system
- Multi-disc, oiled felt drag system
- 5+1BB bearing drive system for smoothness
- Multi-stop anti-reverse system
- Corrosion-resistant graphite body
- Precision Elliptical Gearing system
- Machined aluminum anodized spool
- RESII: Computer balanced Rotor Equalizing System
- Metal line clip
- Spare graphite spool
- LCS line control spool



LongBow XT BF

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
LBXT-630	5.0:1	5+1	232	63.5	3	0.20/240, 0.25/155, 0.30/110	GR	GR	GR	AL	GR	59.00
LBXT-640	5.0:1	5+1	283	73.7	6	0.25/300, 0.30/210, 0.35/155	GR	GR	GR	AL	GR	64.00
LBXT-655	4.5:1	5+1	406	76.2	9	0.30/380, 0.35/280, 0.40/215	GR	GR	GR	AL	GR	69.00
LBXT-665	4.8:1	5+1	586	91.4	11	0.35/390, 0.40/300, 0.50/185	GR	GR	GR	AL	GR	82.00



LBXT-630

Pulzar

PULZAR BAITFEEDER REELS FEATURE:

- Auto-switch freespool system
- Corrosion-resistant graphite body
- 5 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- Machine cut aluminum spool
- Round metal line clip
- Graphite spare spool
- Easy folding aluminum handle
- Wooden handle knob
- S-curve oscillation system
- Machined cut brass pinion gear
- Heavy duty, solid aluminum bail wire
- RESII: Computer-balanced rotor system
- Even Flow line roller



PZB-6000



PULZAR BF

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
PZB-4000	5.0:1	5+1	333	79	10	0.25/260, 0.30/180, 0.35/130	GR	GR	GR	AL	GR	59.90
PZB-6000	4.5:1	5+1	493	80	12	0.30/300, 0.35/220, 0.40/170	GR	GR	GR	AL	GR	64.90
PZB-7000	4.5:1	5+1	523	87	12	0.40/195, 0.45/150, 0.50/125	GR	GR	GR	AL	GR	69.90

BARBARIAN

BARBARIAN REEL FEATURE:

- ON/OFF auto trip bait feeder system
- Multi-disc, Japanese oiled felt drag washers
- 2BB+1RB stainless steel bearings
- Quick-Set ant-reverse bearing
- Precision machine cut brass pinion gear
- Corrosion resistant graphite body and rotor
- Machined aluminum, spool
- Heavy duty solid aluminum bail wire
- RESII: Computer balanced Rotor Equalizing System
- Aluminum double handle



BN-40

BARBARIAN BAITFEEDER

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
BN-40	5.0:1	2BB+1RB	351	76.3	6.8	0.25/290, 0.30/200, 0.35/150	GR	GR	GR	AL	GR	45.00
BN-55	4.5:1	2BB+1RB	464	79.1	13.4	0.30/300, 0.35/220, 0.40/170	GR	GR	GR	AL	GR	50.00

DYNA DRAG XP

DYNA DRAG XP BAITFEEDER REELS FEATURE:

- Auto-switch freespool system
- Corrosion-resistant graphite body
- 3 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- Machine cut aluminum spool
- S-curve oscillation system
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Graphite spare spool from size 4000 and up
- Even Flow line roller
- Round metal line clip
- Rigid metal handle
- T-shape TPE knob



DAXP-4000



DYNA DRAG XP FB

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
DAXP-1000	5.0:1	3+1	228	61	3	0.15/250, 0.20/140, 0.25/90	GR	GR	GR	AL	47.00
DAXP-3000	5.0:1	3+1	280	71	8	0.20/310, 0.25/200, 0.30/135	GR	GR	GR	AL	49.00
DAXP-4000	5.0:1	3+1	331	79	10	0.25/260, 0.30/180, 0.35/130	GR	GR	GR	AL	50.00
DAXP-6000	4.5:1	3+1	482	80	12	0.30/300, 0.35/220, 0.40/170	GR	GR	GR	AL	52.00
DAXP-7000	4.5:1	3+1	509	87	12	0.40/195, 0.45/150, 0.50/125	GR	GR	GR	AL	55.00

POWERLINER PRO

POWERLINER PRO BAITFEEDER REELS FEATURE:

- On/Off auto trip bait feeding system
- Multi-disc, oiled felt drag system
- 4+1BB bearing drive system for smoothness
- Multi-stop anti-reverse system
- Corrosion-resistant graphite body
- Precision Elliptical Gearing system
- Machined aluminum, anodized spool
- Durable stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System
- Metal line clip
- Spare graphite spool



PLP-6000



POWERLINER PRO

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
PLP-6000	4.5:1	4+1	669	102	15	0.30/390, 0.33/315, 0.35/280	GR	GR	GR	AL	GR	77.00
PLP-8000	4.5:1	4+1	683	102	16	0.33/440, 0.35/385, 0.38/320	GR	GR	GR	AL	GR	79.00

Lotus Baitfeeder

LOTUS BAITFEEDER REELS FEATURE:

- Auto-switch freespool system
- Corrosion-resistant graphite body
- 3 ball bearing + 1 roller bearing
- Quick-Set anti-reverse roller bearing
- Machine cut aluminum spool
- Round metal line clip
- Graphite spare spool
- Rigid metal handle
- T-shape TPE handle knob
- S-curve oscillation system
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Even Flow line roller



LTB-6000



LOTUS BAITFEEDER

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
LTB-6000	4.5:1	3+1	480	80	12	0.30/300, 0.35/220, 0.40/170	GR	GR	GR	AL	GR	49.90

AK

AK BAITFEEDER REELS FEATURE:

- Auto-switch freespool system
- Corrosion-resistant graphite body
- 1 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- Aluminum spool
- Design graphite handle
- ABS knob
- S-curve oscillation system
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Even Flow line roller
- Graphite spare spool



AK-4000



AK BF

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
AK-4000	5.0:1	1+1	304	79	10	0.25/260, 0.30/180, 0.35/130	GR	GR	GR	AL	GR	36.00
AK-5000	4.5:1	1+1	458	80	12	0.30/230, 0.35/170, 0.40/130	GR	GR	GR	AL	GR	39.00
AK-6000 Winded with Mono Line												
AK-6000	4.5:1	1+1	445	80	12	0.30/300, 0.35/220, 0.40/170	GR	GR	GR	AL	GR	43.00

Carbonite B-Feeder

CARBONITE B-FEEDER REELS FEATURE:

- Auto-switch freespool system
- Corrosion-resistant graphite body
- 1ball bearing +1 roller bearing
- Quick Set infinite anti-reverse system
- Multi-disc, oiled felt drag system
- Graphite painted spool
- Graphite spare spool
- S-curve oscillation system
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Even Flow line roller



CBBF-4000



CARBONITE B-FEEDER

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
CBBF-4000	5.0:1	1+1	285	79	8	0.25/250, 0.30/165, 0.35/115	GR	GR	GR	GR	GR	29.90
CBBF-5000	4.5:1	1+1	396	79	12	0.30/275, 0.35/195, 0.40/145	GR	GR	GR	GR	GR	32.90

CARBONITE XP

CARBONITE XP BAITFEEDER REELS FEATURE:

- Baitfeeder quick release graphite spool
- Graphite spool
- With green line
- 1 BB bearing drive system
- Precision Elliptical Gearing System
- Plastic line clip
- Spare graphite spool
- Machined cut brass pinion gear
- RESII: Computer balanced Rotor System
- Even flow roller



CBF-155a



CARBONITE XP

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
CBF-140a	5.0:1	1	280	71.6	6	0.30/170, 0.35/130, 0.40/100	GR	GR	GR	GR	GR	27.90
CBF-155a	4.5:1	1	400	75.7	9	0.35/260, 0.40/200, 0.50/120	GR	GR	GR	GR	GR	32.90

Ceymar XT Match FD

CEYMAR XT MATCH FD REELS FEATURE:

- Corrosion-resistant graphite body
- 7 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- CFR : Cyclonic Flow Rotor
- Aluminum 2 tone match spool
- Aluminum regular spare spool
- Rigid metal handle, EVA knob
- Precision Elliptical Gearing System
- Hi-speed gear ratio : 6,2:1
- Machined cut brass pinion gear
- Heavy duty, solid aluminum bail wire
- RESII: Computer-balanced rotor system
- Even Flow line roller
- Multi-disc, Japanese oiled felt drag system



CXT-30MS



CEYMAR XT MATCH FD

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	PE line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
CXT-30MS	6.2:1	7+1	241	84	7	PE0.6(0.128mm)-250M PE0.8(0.148mm)-150M PE1.0(0.165mm)-130M	GR	GR	GR	AL	AL	59.90
CXT-40MS	6.2:1	7+1	301	97	8	PE1.0(0.165mm)-170M PE1.2(0.185mm)-150M PE1.5(0.205mm)-120M	GR	GR	GR	AL	AL	63.90

Carbonite V2 Match

CARBONITE V2 MATCH BF RD & FD FEATURE:

- Corrosion-resistant graphite body
- CFR : Cyclonic Flow Rotor
- 2 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Aluminum 2 tone match spool
- Round metal line clip
- Regular graphite spare spool
- Rigid metal double handle, EVA knob
- Precision Elliptical Gearing System
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Even Flow line roller
- Hi-speed gear ratio : 6,2:1



CBV-40MRS DH

CBV-40MSDH

CARBONITE V2 MATCH FD & RD

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	PE line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
CBV-40MSDH	6.2:1	2+1	338	97	8	PE1.0(0.165mm)-170M PE1.2(0.185mm)-150M PE1.5(0.205mm)-120M	GR	GR	GR	AL	GR	49.90
CBV-40MRS DH	6.2:1	2+1	340	97	8	PE1.0(0.165mm)-170M PE1.2(0.185mm)-150M PE1.5(0.205mm)-120M	GR	GR	GR	AL	GR	49.90
CBV-40MBF	5.0:1	2+1	340	73	6	0.165/170, 0.185/150, 0.205/120	GR	GR	SMA	AL	GR	59.00

Carbonite XP Feeder

CARBONITE XP FEEDER FEATURE:

- Corrosion-resistant graphite body
- CFR : Cyclonic Flow Rotor
- 2 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Aluminum 2 tone shallow spool
- Round metal line clip
- Rigid metal handle, EVA knob
- Precision Elliptical Gearing System
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Even Flow line roller



CBV-40F



CARBONITE XP FEEDER

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	MSRP (€)
CBV-40F	5.0:1	2+1	291	76	8	0.25/180, 0.28/140, 0.30/125	GR	GR	GR	AL	47.90
CBV-55F	4.5:1	2+1	442	79	15	0.30/180, 0.33/150, 0.35/130	GR	GR	GR	AL	49.90

Carbonite Match

CARBONITE RD FEATURE:

- Corrosion resistant graphite body and rotor
- 1+1 ball bearing
- Quick-set anti-reverse roller bearing
- Match graphite spool
- Regular extra graphite spool
- CFR: Cyclonic Flow Rotor technology
- RESII: Computer balanced Rotor Equalizing System
- EVA handle knob



CRM-4000S



CARBONITE MATCH

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Rotor	Spool	Extra Spool	MSRP (€)
CRM-4000S	5.0:1	1+1	264	76	6	PE 0.6 (0.128MM) - 250M PE 0.8 (0.148MM) - 150M PE 1.0 (0.165MM) - 130M	GR	GR	GR	GR	GR	34.90



BAITCAST REELS

At Okuma Fishing Tackle we deliver more than fishing gear. We deliver the motivation to hit the water, the energy to maintain focus and the excitement that injects every cast with high expectations. From avid recreational angler to touring professional, Okuma baitcast reels are a step above. Find premium features like Japanese ABEC-5 spool bearings and aluminum gears as standard features in tournament models instead of aftermarket upgrades. Our selection is not simply a platform upon which to begin customization, but the best a reel can be at every price.



HAKAI

HAKAI

HAKAI DT LOW PROFILE BAITCAST

- LiteCast magnesium frame: corrosion resistant coating
- Corrosion Resistant sideplates for maximum durability
- 42mm oversized hardened machine cut brass main gear
- Multi-disc Stainless Steel and Carbon Hybrid drag system
- Super tuner flitespool developed by Dream Tackle Design
- Patented fliteshaft hollow stainless steel main shaft
- Built in, universal line diameter indicator
- External adjustable magnetic cast control system
- Precision C-40x carbon injection star drag
- 6BB + 1RB stainless steel bearings for ultimate smoothness
- Quick-Set anti-reverse roller bearing for solid hook sets
- Hakai reels are backed by a 3-year limited warranty

FLITE SPOOL **FLITE SHAFT**



HDT101-A



HDT101H-A



HDT101X-A

HAKAI LOW PROFILES

	Model	Gear ratio	Bearings	Weight (g)	Line retrieve(cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)			Frame	Right Sideplate	Left Sideplate	Spool	MSRP (€)
	Hakai DT													
NEW	HDT100-A	6.2:1	6BB + 1RB	167	64	9	0.31/100	0.33/90	0.37/70	MG	GR	GR	AL	169.00
NEW	HDT100H-A	7.3:1	6BB + 1RB	168	76	9	0.31/100	0.33/90	0.37/70	MG	GR	GR	AL	169.00
NEW	HDT100X-A	8.1:1	6BB + 1RB	170	84	9	0.31/100	0.33/90	0.37/70	MG	GR	GR	AL	169.00
NEW	HDT101-A	6.2:1	6BB + 1RB	167	64	9	0.31/100	0.33/90	0.37/70	MG	GR	GR	AL	169.00
NEW	HDT101H-A	7.3:1	6BB + 1RB	168	76	9	0.31/100	0.33/90	0.37/70	MG	GR	GR	AL	169.00
NEW	HDT101X-A	8.1:1	6BB + 1RB	168	84	9	0.31/100	0.33/90	0.37/70	MG	GR	GR	AL	169.00
	Hakai DTS													
NEW	HDT5100-A	6.2:1	6BB + 1RB	165	64	5	0.26/100	0.285/85	0.31/70	MG	GR	GR	AL	169.00
NEW	HDT5100X-A	8.1:1	6BB + 1RB	167	84	5	0.26/100	0.285/85	0.31/70	MG	GR	GR	AL	169.00
NEW	HDT5101-A	6.2:1	6BB + 1RB	165	64	5	0.26/100	0.285/85	0.31/70	MG	GR	GR	AL	169.00
NEW	HDT5101X-A	8.1:1	6BB + 1RB	167	84	5	0.26/100	0.285/85	0.31/70	MG	GR	GR	AL	169.00



KOMODO[®] SS

KOMODO SS LOW PROFILE BAITCAST REELS FEATURE:

- Stainless steel main gear for ultimate power and strength
- Precision machine cut stainless steel pinion gear
- Heavy duty stainless steel drive and spool shafts
- ALC: Rigid diecast aluminum frame and gear sideplate
- CRC: Corrosion-Resistant Coating process
- A6061-T6 machined aluminum, anodized spool
- Multi-disc high output Carbonite drag system
- Micro-click drag star for precise drag settings
- 350 size: 6HPB+1RB corrosion resistant stainless steel bearings
- 450 size: 7HPB+1RB corrosion resistant stainless steel bearings
- Precision Japanese ABEC-5 spool bearings
- Dual anti-reverse for maximum reliability
- Quick-Set anti-reverse roller bearing
- 6-pin Velocity Control casting system
- Synchronized levelwind optimized for braided line
- Zirconium line guide inserts for use with braided line
- Available in both right and left hand retrieve
- On/Off clicker for trolling, chunking or bait fishing from size 300 and up



KDS-463LX



KOMODO SS LOWPROFILES

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Right Sideplate	Left Sideplate	Spool	MSRP (€)
Right handed lowprofile baitcast reels											
KDS-364	6.4:1	6HPB+1RB	310	78.7	11	0.33/250, 0.37/230, 0.41/150	AL	AL	GR	AL	229.00
Left handed lowprofile baitcast reels											
KDS-273LX	7.3:1	6HPB+1RB	238	80	9	0.29/205, 0.33/160, 0.37/125	AL	GR	AL	AL	229.00
KDS-364LX	6.4:1	6HPB+1RB	310	78.7	11	0.33/250, 0.37/230, 0.41/150	AL	GR	AL	AL	229.00
KDS-463LX	6.3:1	7HPB+1RB	453	85.1	14	0.37/265, 0.42/200, 0.55/115	AL	GR	AL	AL	269.00

CITRIX

CITRIX 350-SIZE REELS FEATURE:

- ALC: Rigid diecast aluminum frame and handle side plate
- A6061-T6 machined aluminum, anodized V-shaped spool
- Multi-disc Carbonite drag system
- 7BB+1RB bearings drive system
- Micro-click drag star for precise drag settings
- External adjustable centrifugal cast control system
- Quick-Set anti-reverse roller bearing
- Zirconium line guide inserts for use with braided line
- Easy change palm side plate access port
- Ergonomic handle design allows cranking closer to body
- 6.4:1 gear ratio available in left hand retrieve
- Graphite sideplates
- Available gear ratios: 6.4:1



Ci-364LXa

CITRIX LOWPROFILES

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Right Sideplate	Left Sideplate	Spool	MSRP (€)
Citrix 350											
Ci-364LXa	6.4:1	7+1	312	78.7	11	0.33/250, 0.37/230, 0.41/150	AL	GR	AL	AL	189.00

SERRANO

SERRANO LOW PROFILE BAITCAST REELS FEATURE:

- Rigid, corrosion resistant frame and sideplate construction
- 6BB + 1RB precision stainless steel bearing drive system
- Quick Set anti-reverse bearing for solid hook sets
- Precision cut, high strength brass main and pinion gears
- Externally adjustable magnetic cast control system
- 33.5mm machined aluminum, black anodized spool
- Multi-disc drags washers for consistent performance
- Double paddle, 95mm aluminum swept handle arm
- TGT Grip: Traction Grip Technology



SRN100H-A

SERRANO LOWPROFILES

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Right Sideplate	Left Sideplate	Spool	MSRP (€)
Right Handed Lowprofile Baitcast Reels											
SRN100H-A	7.2:1	6+1	199	76	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	89.00
Left Handed Lowprofile Baitcast Reels											
SRN101-A	6.5:1	6+1	199	68	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	89.00
SRN101H-A	7.2:1	6+1	199	76	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	89.00

JAW

JAW REELS FEATURE:

- Corrosion-resistant graphite frame and side plates
- A6061-T6 machined aluminum, anodized U-shaped spool
- Multi-disc composite drag system
- 6BB+1RB bearing drive system
- External adjustable magnetic cast control system
- Quick-Set anti-reverse roller bearing
- Side plate access port for quick spool changes
- Aluminum handle with EVA handle knobs



J101-A

JAW LOWPROFILES

Model	Gear ratio	Bearings	Weight (g)	Line retrieve(cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Right Sideplate	Left Sideplate	Spool	MSRP (€)
J101-A	6.5:1	6+1	199	68	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	79.00

Ceymar

CETMAR LOW PROFILE BAITCAST REELS FEATURE:

- Corrosion-resistant graphite frame and sideplates
- A6061-T6 machined aluminum, anodized U-shaped spool
- Multi-disc composite drag system
- 5BB+1RB bearing drive system
- External adjustable magnetic cast control system
- Quick-Set anti-reverse roller bearing
- Sideplate access port for quick spool changes
- Ergonomic handle design allows cranking closer to body



C100-A

CEYMAR LOWPROFILES

Model	Gear ratio	Bearings	Weight (g)	Line retrieve(cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Right Sideplate	Left Sideplate	Spool	MSRP (€)
Right Handed Lowprofile Reel											
C100H-A	7.2:1	5+1	199	76	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	79.90
Left Handed Lowprofile Reel											
C101-A	6.5:1	5+1	199	68	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	79.90
C101H-A	7.2:1	5+1	199	76	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	79.90

SCORPIO

SCORPIO LOW PROFILE BAITCAST REELS FEATURE:

- Corrosion-resistant graphite frame and sideplates
- A6061-T6 machined aluminum, anodized U-shaped spool
- Multi-disc composite drag system
- 5BB+1RB bearing drive system
- External adjustable magnetic cast control system
- Quick-Set anti-reverse roller bearing
- Sideplate access port for quick spool changes
- Ergonomic handle design allows cranking closer to body



SCORPIO LOWPROFILES

Model	Gear ratio	Bearings	Weight (g)	Line retrieve(cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Right Sideplate	Left Sideplate	Spool	MSRP (€)
Right Handed Lowprofile Reel											
SP100H-A	7.2:1	5+1	199	76	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	69.90
Left Handed Lowprofile Reel											
SP101-A	6.5:1	5+1	199	68	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	69.90
SP101H-A	7.2:1	5+1	199	76	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	69.90



SP101-A

Fuel Spin

FUEL SPIN LOW PROFILE BAITCAST REELS FEATURE:

- Corrosion-resistant graphite frame and sideplates
- A6061-T6 machined aluminum, anodized U-shaped spool
- Multi-disc composite drag system
- 3BB+1RB bearing drive system
- External adjustable magnetic cast control system
- Quick-Set anti-reverse roller bearing
- Sideplate access port for quick spool changes
- Ergonomic handle design allows cranking closer to body



FUEL SPIN LOWPROFILES

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Right Sideplate	Left Sideplate	Spool	MSRP (€)
Right Handed Lowprofile Reel											
FSP100H-A	7.2:1	3+1	199	76	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	64.90
Left Handed Lowprofile Reel											
FSP101H-A	7.2:1	3+1	199	76	5	0.31/110, 0.33/100, 0.37/80	GR	GR	GR	AL	64.90



FSP100-A



TROLLING REELS

Leadership, innovation, and value are not simply concepts for board rooms and Powerpoint presentations. At Okuma Fishing Tackle, these guiding principles are embodied and evident in each and every product.

Our engineering embraces modern fishing lines and the latest in fishing rod construction to develop reels that deliver the most power with minimal weight. We're redefining the relationship between size of reel and size of fish, and taking larger trophies on smaller reels than ever before. Our reels don't intrude on the experience, they enhance it.

TESORO

TESORO STAR DRAG REELS FEATURE:

- 6061-T6 machined aluminum frame, sideplate and spool
- 17-4 grade stainless steel helical cut gearing
- Multi-disc Carbonite drag system with Cal's drag grease
- CRC: Corrosion-Resistant Coating Process
- Swept aluminum star for increased ergonomics
- Anodized aluminum swept handle reduces wobble while cranking
- 4BB+1RB corrosion resistant bearings, spool bearing with TSI oil
- Ergo grip handle knob with anodized aluminum handle arm
- Dual anti-reverse (mechanical and roller bearing)
- XL Gearing: Drop down gear box
- Quick-Set anti-reverse bearing allows for zero back play in handle
- MSS: Mechanical Stabilizing System for increased durability
- Self-lubricating gear system, all models
- High Speed 6.2:1 gear ratio



TSR-5S



TSR-10S



TSR-12S



(Additional purchase)

TESORO STAR DRAG REELS

Model	Gear ratio	Bearings	Weight (g)	Line retrieve(cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Spool	MSRP (€)
TSR-5NS	6.2:1	4+1	445	99	9	0.32/380, 0.35/280, 0.40/200	AL	AL	AL	379.00
TSR-5S	6.2:1	4+1	472	99	9	0.35/325, 0.40/255, 0.45/190	AL	AL	AL	379.00
TSR-10S	6.2:1	4+1	540	116.8	10	0.35/390, 0.40/290, 0.45/225	AL	AL	AL	399.00
TSR-12S	6.2:1	4+1	550	116.8	10	0.40/375, 0.45/270, 0.54/170	AL	AL	AL	399.00



CZ-55Wa



CZ-10CSa

CORTEZ

CORTEZ STAR DRAG REELS FEATURE:

- Corrosion resistant graphite frame and sideplates
- CZ-55W features aluminum frame and graphite sideplates
- Machined aluminum, anodized spool
- Multi-disc Carbonite drag system
- Forged aluminum, anodized star
- Anodized aluminum swept handle reduces wobble while cranking
- 4BB+1RB stainless steel bearings
- MCS: External magnetic cast control system on 5CS, 10CS and 12CS sizes
- Ergo grip handle knob
- Dual anti-reverse system (mechanical & roller bearing)
- XL Gearing: Drop down gear box
- Quick-Set anti-reverse roller bearing
- MSS: Mechanical Stabilizing System for increased durability
- Self-lubricating gear system, all models



MCS

Okuma's Magnetic Control System is a fully-sealed, 100% waterproof cast control system that reduces backlash and improves casting distance by utilizing the magnetic field generated by the high RPM spinning of the spool during casting. The magnetic field is influenced by the adjustable cast control magnet which exerts an opposing force and allows for minute and accurate adjustments.

CORTEZ STAR DRAG

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Side plates	Spool	MSRP (€)
CZ-5CSa	6.2:1	4+1	396	96.5	7	0.35/370, 0.40/275, 0.45/200	GR	GR	AL	129.00
CZ-10CSa	6.2:1	4+1	499	109.2	8	0.40/360, 0.45/270, 0.50/220	GR	GR	AL	149.00
CZ-12CSa	6.2:1	4+1	522	109.2	8	0.45/410, 0.50/340, 0.55/280	GR	GR	AL	159.00

MAGDA^{PRO} Line Counter

MAGDA PRO LINE COUNTER REELS FEATURE:

- Lightweight, corrosion-resistant frame and side plates
- Corrosion-resistant graphite spools
- Mechanical line counter function measures in feet
- 2 Stainless steel ball bearing
- 16-point anti-reverse for improved hookups
- Line counter screw port for improved air access
- Durable Machine cut brass gearing
- Self-Lubricating Gear System, all models
- 20 – 45 sizes with Ergo grip handle knob design
- 15-size features a twin paddle handle configuration
- Automatic trip spool engaging mechanism
- Stainless steel levelwind line guide system
- DLXT represents left hand crank models
- MA-15DXT-T features a twin paddle handle design



MAGDA PRO DXT LINECOUNTERS



Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Spool	MSRP (€)
Right handed Linecounter reels										
MA-15DXT-T	5.1:1	2 BB	357	58.4	6	0.35/220, 0.40/170, 0.45/120	GR	GR	GR	70.00
MA-20DXT	5.1:1	2 BB	366	58.4	6	0.35/270, 0.40/210, 0.45/150	GR	GR	GR	72.00
MA-30DXT	4.0:1	2 BB	457	61.0	7	0.40/420, 0.45/320, 0.50/260	GR	GR	GR	75.00
Left handed Linecounter reels										
MA-20DLXT	5.1:1	2 BB	366	58.4	6	0.35/270, 0.40/210, 0.45/150	GR	GR	GR	73.00
MA-30DLXT	4.0:1	2 BB	457	61.0	7	0.40/420, 0.45/320, 0.50/260	GR	GR	GR	76.00

MAGDA DT

Right handed Linecounter reels										
MA-15DT-T	5.1:1	0	365	58.4	6	0.35/220, 0.40/170, 0.45/130	GR	GR	GR	59.00
MA-20DT	5.1:1	0	370	58.4	6	0.35/270, 0.40/210, 0.45/150	GR	GR	GR	62.00
MA-30DT	4.0:1	0	460	61.0	7	0.40/420, 0.45/320, 0.50/260	GR	GR	GR	65.00
Left handed Linecounter reels										
MA-15DLT	5.1:1	0	365	62	6	0.35/220, 0.40/170, 0.45/130	GR	GR	GR	69.00
MA-20DLT	5.1:1	0	370	58.4	6	0.35/270, 0.40/210, 0.45/150	GR	GR	GR	69.00
MA-30DLT	4.0:1	0	450	64	7	0.40/420, 0.45/320, 0.50/260	GR	GR	GR	74.90

CONVECTOR LINE COUNTER

CONVECTOR LINE COUNTER REELS FEATURE:

- Lightweight corrosion resistant frame and sideplates
- Machined aluminum, gun smoke anodized spool
- Stainless steel reinforcing sideplate rings
- Mechanical line counter function measures in feet
- Multi-disc Carbonite drag system
- Ratcheting drag star for precise drag settings
- 2BB+1RB Stainless steel bearing drive system
- Quick-Set anti-reverse roller bearing
- Dual anti-reverse system. (Mechanical & roller bearing)
- Speed Lock pinion gear system
- Durable high-grade brass main and pinion gear system
- XL gearing: Drop down gear box on all models
- Self lubricating gear system, all models
- Wide Mouth levelwind: Clearance for copper line
- Spool stabilizing system for increased durability
- Ergo grip handle knobs featured on all models
- DLX represents left hand crank line counter models
- MSS: Mechanical Stabilizing System for increased durability



CONVECTOR LINE COUNTERS



Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Spool	MSRP (€)
Right handed Linecounter reels										
CV-15D	5.1:1	2+1	448	58	8	330/10 (0.30), 290/12 (0.32), 240/14 (0.35)	GR	GR	AL	117.00
CV-20D	5.1:1	2+1	448	58	8	290/14 (0.35), 230/18 (0.40), 210/20 (0.42)	GR	GR	AL	119.00
CV-30D	4.0:1	2+1	610	61.0	7	0.40/420, 0.45/320, 0.50/260	GR	GR	AL	122.00
CV-45D	4.0:1	2+1	649	66.0	7	0.45/450, 0.50/360, 0.55/300	GR	GR	AL	125.00
Right Handed High Speed Linecounters										
CV-45DS	6.2:1	2+1	638	104.9	7	0.45/450, 0.50/360, 0.55/300	GR	GR	AL	125.00

CVT SYSTEM

Clear View Technology anti-fogging line counter

QUICK DROP

QUICK DROP SYSTEM

Quick Drop, switch for precision lure/bait placement

CONVECTOR

CONVECTOR LOWPROFILE LINECOUNTER FEATURE:

- Precision machine cut brass main and pinion gears
- Mechanical line counter function measures in feet
- CVT: Clear View Technology anti-fogging line counter
- 2BB + 1RB stainless steel bearings for long last performance
- Automatic trip, spool engagement mechanism
- A6061-T6 machined aluminum, anodized spool
- Multi-disc high output Carbonite drag system
- Dual anti-reverse for maximum reliability
- Synchronized levelwind optimized for braided line
- Quick Drop, switch for precision lure/bait placement
- Available in both right and left hand retrieve
- On/Off clicker perfect for all trolling applications



CV-354D



CONVECTOR LOWPROFILE LINECOUNTER

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Left Sideplate	Right Sideplate	Spool	MSRP (€)
Convector Right hand crank version											
CV-163D	6.3:1	2+1	224	68	5	0.26/240, 0.31/160, 0.37/110	GR	GR	GR	AL	79.00
CV-354D	5.4:1	2+1	332	66	10	0.33/240, 0.37/180, 0.41/145	GR	GR	GR	AL	94.00
Convector Left hand crank version											
CV-163DLX	6.3:1	2+1	224	68	5	0.26/240, 0.31/160, 0.37/110	GR	GR	GR	AL	79.00
CV-354DLX	5.4:1	2+1	332	66	10	0.33/240, 0.37/180, 0.41/145	GR	GR	GR	AL	94.00

Cold Water

COLD WATER LINE COUNTER REELS FEATURE:

- Lightweight corrosion resistant frame & sideplates
- Multi-disc, Carbonite drag system
- Aluminum handle arm with Ergo grip handle knobs
- 2BB + 1RB Stainless steel ball bearings
- Quick-set anti-reverse roller bearing
- Oversized machine cut brass XL drive and pinion gears
- Self-lubricating gearing system, all models
- Speed Lock pinion gear system, all models
- Machined aluminum, two tone anodized spool
- Dual anti-reverse system. (Mechanical and roller bearing)
- Mechanical line counter function measures in feet
- CVT: Clear View Technology anti-fogging line counter
- Aluminum ratcheting drag star for precision drag settings
- Wide Mouth levelwind: Clearance for copper lines
- Automatic trip spool engaging mechanism
- MSS: Mechanical Stabilizing System for increased durability
- DLX represent left hand crank line counter models



CW-303D

COLD WATER LINE COUNTERS

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force (kg)	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Spool	MSRP (€)
Right handed Linecounter reels										
CW-203D	5.1:1	2+1	425	58.4	6	0.35/270, 0.40/210, 0.45/150	GR	GR	AL	139.00
CW-303D	4.2:1	2+1	567	61.0	7	0.40/420, 0.45/320, 0.50/260	GR	GR	AL	153.00
CW-453D	4.2:1	2+1	618	66.0	7	0.45/450, 0.50/360, 0.55/300	GR	GR	AL	159.00
Left handed Linecounter reels										
CW-153DLX	5.1:1	2+1	414	58.4	6	0.35/220, 0.40/170, 0.45/130	GR	GR	AL	132.00
CW-203DLX	5.1:1	2+1	425	58.4	6	0.35/270, 0.40/210, 0.45/150	GR	GR	AL	139.00
CW-303DLX	4.2:1	2+1	567	61.0	7	0.40/420, 0.45/320, 0.50/260	GR	GR	AL	153.00



CLASSIC PRO XPD

CLASSIC PRO XPD REELS FEATURE:

- Lightweight corrosion resistant frame and sideplates
- Machined aluminum, anodized spool
- Stainless steel reinforcing sideplate rings
- Mechanical line counter function measures in feet
- Multi-disc Carbonite drag system
- 2 Stainless steel ball bearings
- Durable machine-cut brass gearing
- Ergo Grip handle knob with anodized aluminum handle arm
- Self lubricating gear system, all models
- Stainless steel level-wind line guide system



CLASSIC PRO XPD

Model	Gear ratio	Ball Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Spool	MSRP (€)
Right handed Linecounter reels										
XPD-20Da	5.1:1	2	390	58.4	6 kg	0.35/270, 0.40/210, 0.45/150	GR	GR	AL	85.00
XPD-30Da	4.0:1	2	500	61.0	7 kg	0.40/420, 0.45/320, 0.50/260	GR	GR	AL	87.00
Left handed Linecounter reels										
XPD-20DLXa	5.1:1	2	390	58.4	6 kg	0.35/270, 0.40/210, 0.45/150	GR	GR	AL	85.00
XPD-30DLXa	4.0:1	2	500	61.0	7 kg	0.40/420, 0.45/320, 0.50/260	GR	GR	AL	87.00



CLASSIC PRO

CLASSIC PRO XP REELS FEATURE:

- Lightweight corrosion resistant frame and sideplates
- Machined aluminum, anodized spool
- Ported graphite frame design
- Stainless steel reel foot for strength
- Dependable multi-disc Rulidium drag system
- Classic Pro XP features 2 ball bearings
- Machine cut brass and stainless steel gearing
- Aluminum power handle with T-style knobs
- Self lubricating gear system
- Stainless steel levelwind line guide system



CLX-452La

CLX REELS FEATURE:

- Lightweight corrosion resistant frame and sideplates
- Corrosion resistant graphite spools
- Ported graphite frame design
- Stainless steel reel foot for strength
- Dependable multi-disc Rulidium drag system
- CLX features a bushing drive
- Aluminum power handle with T-style knobs
- Self lubricating gear system
- Stainless steel levelwind line guide system



CLX-200La

CLASSIC PRO XP AND CLASSIC CLX

Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Force	Monofilament line capacity (diameter in mm.)	Frame	Sideplates	Spool	MSRP (€)
Classic Pro XP levelwind star drag reels										
XP-452La	3.8:1	2	472	63.5	6 kg	0.45/450, 0.50/360, 0.55/300	GR	GR	AL	79.00
Classic CLX Right handed levelwind star drag reels										
CLX-200La	5.1:1	Bushing	333	58.4	5 kg	0.35/270, 0.40/210, 0.45/150	GR	GR	GR	55.00
CLX-300La	3.8:1	Bushing	414	61.0	6 kg	0.40/420, 0.45/320, 0.50/260	GR	GR	GR	58.00
CLX-450La	3.8:1	Bushing	441	63.5	6 kg	0.45/450, 0.50/360, 0.55/300	GR	GR	GR	62.00
Classic CLX Left handed levelwind star drag reels										
CLX-300LXa	3.8:1	Bushing	414	61.0	6 kg	0.40/420, 0.45/320, 0.50/260	GR	GR	GR	58.00
Classic Pro CLX Right handed levelwind star drag reels										
CLX-302La	3.8:1	2	438	61.0	6 kg	0.40/420, 0.45/320, 0.50/260	GR	GR	GR	75.00
CLX-452La	3.8:1	2	474	63.5	6 kg	0.45/450, 0.50/360, 0.55/300	GR	GR	GR	79.00
Classic Pro CLX Left handed levelwind star drag reels										
CLX-302LXa	3.8:1	2	438	61.0	6 kg	0.40/420, 0.45/320, 0.50/260	GR	GR	GR	75.00





MAKAIRA®




DUAL FORCE DRAG SYSTEM

The specialized carbon DFD or Dual Force Drag system used on all Makaira reels was specifically engineered to be mounted in the right side of the spool in order to bring all the mechanical workings closer together to maximize alignment and durability. The farther mechanical parts are separated the more opportunity there is for tolerance error and flexing which causes parts alignment issues. The DFD principal was specifically designed around the "Pull Bar Drag System". The major advantage to a "Pull Bar Drag System" is that the drag is being pulled rather than pushed. The most common type of lever drag in the industry is the "Push Bar Drag System". The Push Bar System places heavy pressure on the left side plate and utilizes the frame for overall stability


which is a fatal flaw in this type of design. This pressure creates frame flex, reducing drag pressure and causing tolerance alignment issues. This problem is further exaggerated on open top designs from other companies. One of the major benefits to the pull bar design is that there is no pressure placed on the frame. Therefore, our open top frame designs will not suffer frame flex found in our competitors reels. This highly efficient drag system was designed and engineered by Tiburon Engineering USA to increase maximum drag pressure, reduce side load pressure on ball bearings and improve heat dissipation for long term smoothness over extended periods. This Okuma DFD is considered a wet drag system comprised of two carbon fiber drag washers that are sandwiched together and bonded with a fiber glass core. Pure carbon washers are coated with a thin layer of Cal Sheet's Universal drag grease for virtually zero start up inertia. These washers are compressed by two precision ground 17-4 grade stainless steel drag plates that have been ground flat then polished for maximum smoothness. These stainless steel friction drag plates have a minimum 32 Rockwell hardness allowing for high-end drag settings and consistently smooth drag performance at all ranges. The drag system is secured to the right side of the spool by a 6061-T6 grade aluminum cover that features Type-II anodizing for maximum alignment, strength and corrosion resistance.

MAKAIRA REELS WITH TDC DRAG CAMS

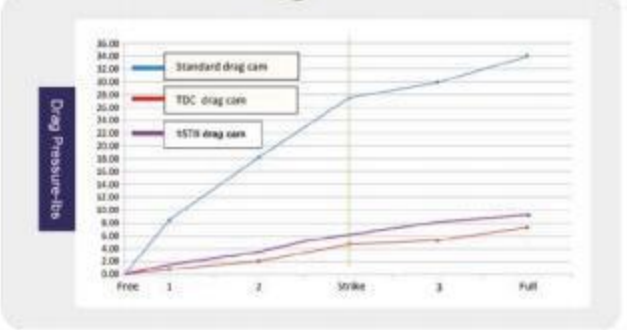


MK8II/10II/15II/15TII-Line class 15 lbs

Drag Lever Position	1	2	Strike	3	Full
Standard drag cam	8.6	18.6	27.3	30.2	34.1
TDC drag cam	0.9	2.1	4.7	5.5	7.0
15TII TDC drag cam	1.5	2.8	4.7	6.2	7.3

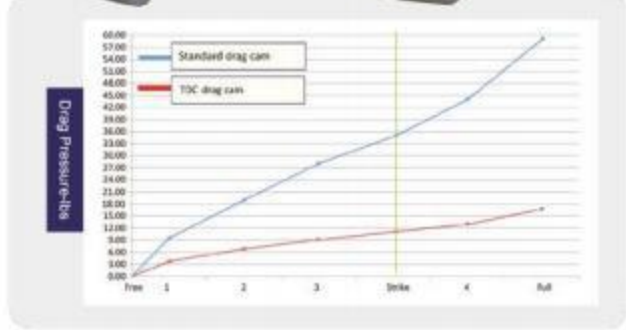


MK16II/20II/30II-Line class 30 lbs

Drag Lever Position	1	2	3	Strike	4	Full
Standard drag cam	10.5	19.2	28.3	38.2	44.6	59.3
TDC drag cam	4.2	7.0	9.1	11.4	13.7	17.5

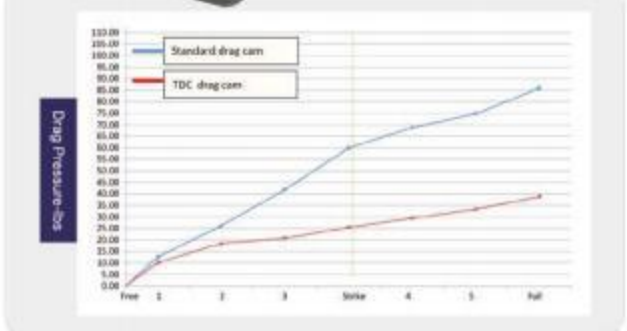

MK50II/50WII-Line class 50 lbs

Drag Lever Position	1	2	3	Strike	4	5	Full
Standard drag cam	12.0	26.1	42.7	59.6	67.6	75.8	86.7
TDC drag cam	10.3	17.7	21.4	26.2	29.1	33.2	38.9

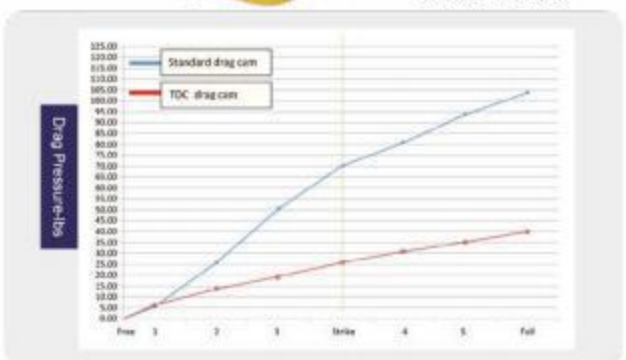

MK80WII/130II-Line class 80 lbs

Drag Lever Position	1	2	3	Strike	4	5	Full
Standard drag cam	4.8	26.5	51.1	69.7	81.0	93.1	103.4
TDC drag cam	5.5	13.6	19.3	26.1	31.0	35.3	39.4

MAKAIRA®

TOURNAMENT DRAG CAM
IGFA LINE CLASSES FOR MAKAIRA



TDC-80WII/130II



TDC-50II/50WII



TDC-16II/20II/30II



TDC-8II/10II/15II/15TII

TROLLING REELS



Okuma's TDC or "Tournament Drag Cam" is designed with a more gradual ramp in the cam system that is intended for anglers fishing light line and tournament IGFA line classes. The standard cam that is installed in the Makaira reels is engineered to be compatible with braided line and offers aggressive drag ramps in order to output heavy drag ratings. The Makaira reels are engineered to output extreme drag pressure, but this is not required by all anglers. These reels have been designed to offer customization and with the TDC cam system, Okuma is offering anglers a reel that is versatile for a wide range of fishing applications, allowing anglers the ability to achieve a more gradual increase in drag settings.



SILENT ANTI-REVERSE:

The Makaira's proprietary anti-reverse system allows for a smoother and quieter feeling. We equate this feeling to that of a Lexus, when compared to other reels in the market. Most reels in the market hide their rough gear quality by the noise and vibration caused by the engagement and clacking of the anti-reverse pawls. The Okuma silent system is unlike any other 2-speed reel in the industry for smoothness. This anti-reverse system is supported by a 12 point double dog anti-reverse pawl system. The Makaira system is very simple in principal but the performance is extremely advanced. As you turn the reel forward the anti-reverse pawls slide open allowing a friction free and quiet retrieve. As soon as the handle is stopped or pulled backwards the anti-reverse pawls are engaged into place by their drive shaft actuated sliding system. The strength of this anti-reverse system does not solely rely on a dog spring like found on most of our competitors reels. The sliding function does not rely heavily on a dog spring system and is mainly controlled by the forward and reverse movement applied to the drive shaft through the movement of the angler turning the handle.



HELICAL CUT GEARING:

Makaira lever drag reels utilize helical cut main and pinion gears. This process allows for improved gear meshing which equates to improved gear smoothness. The angled teeth found in helical cut gears engage more gradually than straight cut or spur gear teeth. This allows helical gears to run smoother and quieter compared to spur gears. Spur gears cause impact stress and noise, because of the hard meshing and can not take as much torque as helical gears because their teeth are receiving impact blows as they mesh together.



GREASE AND OIL:

To further enhance the corrosion resistance of Makaira reels, Okuma applies our CRC or Corrosion Resistant Coating process to all internal and external parts for maximum protection. Our CRC process utilizes a coating process of Corrosion X HD formula that actually penetrates and bonds to the aluminum parts for long term protection. The extra steps taken in the assembly of the Makaira allows this reel to be a leader in the fishing tackle industry for long term use and performance. To further enhance the Makaira's function and performance, Okuma applies Cal's Universal drag grease to our carbon fiber drag washers for the smoothest wet drag system. The addition of Cal's drag grease allows for virtually zero start up inertia and smooth performance at all settings. Cal's Universal grease is also used for coating moving parts such as the main and pinion gears for improved performance.

MAKAIRA

Model	Type of braid	Braided Line Length	Top shot length
Braid Line Capacity for Makaira Reels			
MK-16II	Hollow Core	600-yds of 100-lbs	50 ft. wind on leader
MK-20II	Hollow Core	700-yds of 100-lbs	50 ft. wind on leader
MK-30II	Hollow Core	800-yds of 100-lbs (HC)	80-yds of 80-lbs
MK-50II	Hollow Core	600-yds of 130-lbs (HC)	50 to 80-yds of 80 to 100-lbs
MK-50WII	Hollow Core	800-yds of 130-lbs (HC)	50 to 80-yds of 80 to 100-lbs
MK-80WII	Hollow Core	1000-yds of 80-lbs (HC)	80 to 100-yds of 130-lbs

TROLLING REELS

MAKAIRA®

MAKAIRA REELS FEATURE:

- 6061-T6 machined aluminum frame with forged side plates
- 17-4 grade stainless steel gearing
- Helical cut gears for increased torque, smoothness and improved gear meshing
- Makaira reels all feature two-speed gearing systems
- Gold anodized two-speed gear shifter housing
- Cold forged, Type-II anodized, machined aluminum spool
- CRC: Corrosion Resistant Coating process
- Patented spool pin system for use with braided or mono lines
- Carbonite Dual Force drag system featuring Cal's universal drag grease
- Custom designed thrust bearing: Alleviates side load on heavy drag settings
- 4-pcs ABEC-5 precision Sapporo stainless steel ball bearings
- MK-80WII features 6-pcs of Sapporo ball bearings
- Double-dog, proprietary silent anti-reverse system
- Ratcheting drag lever and pre-set knob for precise drag setting
- Patented T-Bar handle with Easy Roll graphite insert on all models
- Heavy duty stainless steel ratcheting clicker system
- Heavy duty, 17-4 grade stainless steel drive and spool shafts
- Type-II gold anodized frame, sideplates, spool, drag lever and handle
- Open top frame design on 10II, 15II, 16II, 20II, and 50II
- Lug and plug system on all open top reel models
- Machined thumb rest on rear cross bar for improved ergonomics
- Forged aluminum full hard anodized reel foot and reel clamp
- Machine-etched marlin logo on left side plate
- Precision placement of drain holes maximizes water removal from reel
- Special screw ports around side plate screws reduces water/corrosion buildup

MK-10II



MK-16II



MK-20II



MK-30II



MK-130II



MK-50II



MK-130II

MAKAIRA



Model	Gear ratio	Bearings	Weight (g)	Line retrieve (cm)	Monofilament line capacity (diameter in mm.)	Braid line capacity (diameter in mm.)	Max Drag @ Strike with Freespool	Max Drag @ Full with Freespool	Frame style	Side-plates	Spool	MSRP (€)
Two-Speed Lever Drag Reels												
MK-16II	4.3:1 & 1.3:1	4BB + 1TB	1160	99.6 & 30.0	0.42/800, 0.48/600, 0.55/450	0.36/1000, 0.41/830, 0.44/630	15.4 kg	21.7 kg	Topless	AL	AL	569.00
MK-20II	3.8:1 & 1.7:1	4BB + 1TB	1298	100.1 & 44.5	0.48/800, 0.55/600, 0.60/480	0.36/1250, 0.41/1100, 0.44/880	16.8 kg	25.0 kg	Topless	AL	AL	589.00
MK-30II	3.8:1 & 1.7:1	4BB + 1TB	1417	100.1 & 44.5	0.55/700, 0.60/640, 0.70/500	0.36/1620, 0.41/1300, 0.44/1260	16.8 kg	25.0 kg	Crossbar	AL	AL	599.00
MK-50II	3.2:1 & 1.3:1	4BB + 1TB	1741	96.0 & 38.9	0.55/910, 0.70/590, 0.90/360	0.44/1300, 0.49/1000, 0.7/600	27.2 kg	39.0 kg	Topless	AL	AL	669.00
MK-50WII	3.2:1 & 1.3:1	4BB + 1TB	1843	96.0 & 38.9	0.70/820, 0.75/710, 0.90/510	0.44/1720, 0.49/1540, 0.7/890	27.2 kg	39.0 kg	Crossbar	AL	AL	679.00
MK-80WII	3.1:1 & 1.2:1	6BB + 1TB	3289	116.1 & 52.9	0.90/910, 1.00/770, 1.12/600	0.49/2890, 0.7/1580, 0.85/1300	32.1 kg	45.4 kg	Crossbar	AL	AL	999.00
MK-130II	2.2:1 & 1.2:1	6BB + 1TB	4750	100.8 & 55.1	0.90/1450, 1.00/1170, 1.12/920	0.7/2390, 0.85/1900, 0.95/1740	34.1 kg	45.4 kg	Crossbar	AL	AL	1199.00

MAKAIRA[®] SPECIAL EDITION

MAKAIRA SEa REELS FEATURE:

- Open spool bearings with TSI-301 oil. Increases freespool 2-1/2 times.
- MK80WIISEa and MK130IISEa feature grease-packed spool bearings
- All non-spool bearings feature full grease pack for maximum longevity.
- Features Special Edition Gun Smoke and Black anodizing.
- SEa reels feature a yellowfin tuna etched into the sideplate.
- Frames have been machined out for increased clearance between spool and cross bars.
- MK-10/15 feature MK-20 size handle knobs.
- MK-20/30 feature the MK-50 handle arm and knobs
- Lower speed 1.3:1 gear ratio featured in 20/30 sizes.
- Lower speed 1.0:1 gear ratio featured in 50 size.
- Type-II gun smoke anodized frame, side plates and drag lever



MAKAIRA SEa

Model	Gear ratios	Bearings	Weight (g)	Line retrieve (cm)	Monofilament line capacity (diameter in mm.)	Max Drag @ Strike with Freespool	Max Drag @ Full with Freespool	Frame style	Frame	Sideplates	Spool	MSRP (€)
Two-Speed Lever Drag Reels												
MK-10II SEa	4.7:1 & 2.1:1	4BB + 1TB	740	85.1 & 38.1	0.37/420, 0.42/350, 0.48/260	12.3 kg	15.4 kg	Topless	AL	AL	AL	509.00
MK-15II SEa	4.7:1 & 2.1:1	4BB + 1TB	822	98.8 & 43.4	0.45/525, 0.48/385, 0.55/295	14.5 kg	18.2 kg	Topless	AL	AL	AL	559.00
MK-16II SEa	4.3:1 & 1.3:1	4BB + 1TB	1134	99.6 & 30.0	0.42/800, 0.48/600, 0.55/450	15.4kg	21.7kg	Topless	AL	AL	AL	569.00
MK-20II SEa	3.8:1 & 1.3:1	4BB + 1TB	1298	100.1 & 33.5	0.48/800, 0.55/600, 0.60/480	16.8 kg	25.0 kg	Topless	AL	AL	AL	589.00
MK-30II SEa	3.8:1 & 1.3:1	4BB + 1TB	1417	100.1 & 33.5	0.55/770, 0.60/640, 0.70/500	16.8 kg	25.0 kg	Topless	AL	AL	AL	599.00
MK-50WII SEa	3.2:1 & 1.0:1	4BB + 1TB	1843	96.0 & 30.2	0.70/820, 0.75/710, 0.90/510	27.2 kg	39.0 kg	Crossbar	AL	AL	AL	679.00
MK-80WII SEa	3.1:1 & 1.2:1	6BB + 1TB	3289	116.1 & 52.1	0.90/910, 1.00/770, 1.12/600	32.1 kg	45.4 kg	Crossbar	AL	AL	AL	999.00
MK-130II SEa	2.2:1 & 1.2:1	6BB + 1TB	4750	100.8 & 55.1	0.90/1450, 1.00/1170, 1.12/920	34.1 kg	45.4 kg	Crossbar	AL	AL	AL	1199.00

MAKAIRA®

MAKAIRA SEa SILVER REELS FEATURE:

- Open spool bearings with TSI-301 oil. Increases freespool 2-1/2 times.
- MK80WII SEa Silver and MK-130II SEa Silver feature grease-packed spool bearings
- All non-spool bearings feature full grease pack for maximum longevity.
- Features Special Edition Silver and Black anodizing.
- SEa reels feature a yellowfin tuna etched into the sideplate.
- Frames have been machined out for increased clearance between spool and cross bars.
- MK-10 feature MK-20 size handle knobs.
- MK-20/30 feature the MK-50 handle arm and knobs
- Lower speed 1.3:1 gear ratio featured in 20/30 sizes.
- Lower speed 1.0:1 gear ratio featured in 50 size.
- Type-II silver anodized frame, side plates and drag lever



MK10II-SEa



MK15TII-SEa



MK30II-SEa



MK16II-SEa



MK20II-SEa

MAKAIRA SEa SILVER

Model	Gear ratios	Bearings	Weight (g)	Line retrieve (cm)	Monofilament line capacity (diameter in mm.)	Max Drag @ Strike with Freespool	Max Drag @ Full with Freespool	Frame style	Frame	Sideplates	Spool	MSRP (€)
Two-Speed Lever Drag Reels												
MK-10II SEa-Silver	4.7:1 & 2.1:1	4BB + 1TB	740	85.1 & 38.1	0.37/420, 0.42/350, 0.48/260	12.3 kg	15.4 kg	Topless	AL	AL	AL	509.00
MK-15TII SEa-Silver	4.7:1 & 2.1:1	4BB + 1TB	822	98.8 & 43.4	0.45/525, 0.48/385, 0.55/295	14.5 kg	18.2 kg	Topless	AL	AL	AL	559.00
MK-16II SEa-Silver	4.3:1 & 1.3:1	4BB + 1TB	1134	99.6 & 30	0.42/800, 0.48/600, 0.55/450	15.4 kg	21.7 kg	Topless	AL	AL	AL	569.00
MK-20II SEa-Silver	3.8:1 & 1.3:1	4BB + 1TB	1298	100 & 33.5	0.48/800, 0.55/600, 0.60/480	16.8 kg	25 kg	Topless	AL	AL	AL	589.00
MK-30II SEa-Silver	3.8:1 & 1.3:1	4BB + 1TB	1417	100 & 33.5	0.55/770, 0.60/640, 0.70/500	16.8 kg	25 kg	Topless	AL	AL	AL	599.00
MK-50II SEa-Silver	3.2:1 & 1.0:1	4BB + 1TB	1707	96 & 30.2	0.55/910, 0.70/590, 0.90/360	27.2 kg	39.0 kg	Topless	AL	AL	AL	669.00
MK-50WII SEa-Silver	3.2:1 & 1.0:1	4BB + 1TB	1843	96 & 30.2	0.70/820, 0.75/710, 0.90/510	27.2 kg	39.0 kg	Crossbar	AL	AL	AL	679.00
MK-80WII SEa-Silver	3.1:1 & 1.2:1	6BB + 1TB	3289	116.1 & 52.1	0.90/910, 1.00/770, 1.12/600	32.1 kg	45.4 kg	Crossbar	AL	AL	AL	999.00
MK-130II SEa-Silver	2.2:1 & 1.2:1	6BB + 1TB	4750	100.8 & 55.1	0.90/1450, 1.00/1170, 1.12/920	34.1 kg	45.4 kg	Crossbar	AL	AL	AL	1 199.00

ALIJOS

ALIJOS LEVER DRAG REELS FEATURE:

- 17-4 grade stainless steel main and pinion gears
- Carbonite Dual Force Drag system with Cal's drag grease
- 6-NMB corrosion resistant stainless steel bearings
- Spool bearings feature TSI-301 oil for unmatched freespool
- Rigid 1-pcs frame and left sideplate construction
- 6061-T6 machined aluminum frame and sideplates
- Cold forged, Type-II anodized, machined aluminum spool
- Silent retrieve system for ultimate cranking smoothness
- 90mm handle arm, increases cranking leverage/power
- Oversized T-Bar handle on all models, for cranking power
- Lug and plug harness system featured on 12 and 16 sizes
- External adjustable cast control system on left sideplate
- CRC: Corrosion Resistant Coating process

ALIJOS HIGH SPEED LEVER DRAG REELS FEATURE:

- Optimized for fishing consistent light drag settings
- Features TDC drag cams for gradual drag curves
- High speed 6.4:1 gear ratios for quick line recovery
- 17-4 grade stainless steel main and pinion gears
- Carbonite Drag system with Cal's drag grease
- 6-NMB corrosion resistant stainless steel bearings
- Dual anti-reverse system (Mechanical and roller bearing)
- QuickSet anti-reverse bearing allows for zero handle back play
- Rigid 1-pcs frame and left sideplate construction
- 6061-T6 machined aluminum frame and sideplates
- Cold forged, Type-II anodized, machined aluminum spool
- Silent retrieve system for ultimate cranking smoothness
- Lug and plug harness system featured on 12 and 16 sizes
- CRC: Corrosion Resistant Coating process



A-16S SE



ALIJOS

Model	Gear ratios	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Pressure(kg)	Monofilament line capacity (diameter in mm.)	Frame	Left Sideplate	Right Sideplate	Spool	MSRP (€)
ALIJOS Single-Speed / Special Edition											
AJ-12SSE	6.4:1	6+1	720	123	4.6 & 2.6	0.42/510, 0.48/380, 0.55/290	AL	AL	AL	AL	399.00
AJ-16SSE	6.4:1	6+1	890	149	4.6 & 2.6	0.42/800, 0.48/600, 0.55/450	AL	AL	AL	AL	449.00

MACHINED RIGID FRAME CONSTRUCTION

Okuma's Machined Rigid Frame construction incorporates a one-piece fully-machined aluminum frame. These rigid bar-stock aluminum frames are the ultimate in precision alignment and tolerances withstanding more pressure and torque than any other material used in our industry for frame materials.



DUAL FORCE DRAG SYSTEM

This drag system is specifically engineered to be mounted in the right side of the spool, designed around a Pull Bar Drag System which keeps all mechanical workings in precise alignment and places no pressure on the frame. This system works in conjunction with a custom designed thrust bearing, which alleviates side load at heavy drag settings.



17-4 GRADE STAINLESS STEEL MAIN AND PINION GEARS

CORROSION RESISTANT COATING-CRC

Okuma applies our CRC or Corrosion Resistant Coating process to all internal and external parts for maximum protection.

Our CRC process utilizes a coating process of Corrosion X HD formula that actually penetrates and bonds to the aluminum parts for long term protection.

CAVALLA

CAVALLA LEVER DRAG REELS FEATURE:

- Rigid 1-pcs frame and left sideplate construction
- 6061-T6 Machined aluminum frame and sideplates
- 17-4 grade stainless steel main and pinion gears
- Carbonite drag system with Cal's drag grease
- Cold forged, Type-II anodized, machined aluminum spool
- CRC: Corrosion Resistant Coating process
- 4 BB corrosion resistant stainless steel bearings
- Ergo Grip handle knob with anodized aluminum handle arm
- Silent retrieve system for cranking smoothness
- On/Off bait clicker for all lever drag models



CAVALLA

Model	Gear ratios	Bearings	Weight (g)	Line retrieve (cm)	Max Drag Pressure(kg)	Monofilament line capacity (diameter in mm.)	Frame	Left Sideplate	Right Sideplate	Spool	MSRP (€)
Right Handed Two Speed Reels											
CAV-5NII	6.4:1 & 3.8:1	4BB	460	107 & 63	7 & 11	0.32/385, 0.37/275, 0.42/225	AL	AL	AL	AL	279.00
CAV-5II	6.4:1 & 3.8:1	4BB	485	107 & 63	7 & 11	0.32/570, 0.37/400, 0.42/320	AL	AL	AL	AL	289.00
CAV-12NII	4.7:1 & 2.1:1	4BB	675	90 & 40	12.2 & 15.4	0.42/300, 0.48/200, 0.55/150	AL	AL	AL	AL	379.00
CAV-12II	4.7:1 & 2.1:1	4BB	705	90 & 40	12.2 & 15.4	0.42/510, 0.48/380, 0.55/290	AL	AL	AL	AL	399.00
Left Handed Two Speed Reels											
CAV-5NIIILX	6.4:1 & 3.8:1	4BB	460	107 & 63	7 & 11	0.32/385, 0.37/275, 0.42/225	AL	AL	AL	AL	279.00
CAV-5IILX	6.4:1 & 3.8:1	4BB	485	107 & 63	7 & 11	0.32/570, 0.37/400, 0.42/320	AL	AL	AL	AL	289.00
CAV-12IILX	4.7:1 & 2.1:1	4BB	705	90 & 40	12.2 & 15.4	0.42/510, 0.48/380, 0.55/290	AL	AL	AL	AL	399.00
Left Handed Two Speed Reels											
CAV-5S	6.4:1	4BB	465	107	7 & 11	0.32/570, 0.37/400, 0.42/320	AL	AL	AL	AL	259.00
CAV-5NS	6.4:1	4BB	440	107	7 & 11	0.32/385, 0.37/275, 0.42/225	AL	AL	AL	AL	269.00

MACHINED RIGID FRAME CONSTRUCTION

Okuma's Machined Rigid Frame construction incorporates a one-piece fully-machined aluminum frame. These rigid bar-stock aluminum frames are the ultimate in precision alignment and tolerances withstanding more pressure and torque than any other material used in our industry for frame materials.



17-4 GRADE STAINLESS STEEL MAIN AND PINION GEARS



ERGONOMIC DESIGN

The Ergo Grip handle knob is an extremely comfortable oversized handle-knob design for both speed and power. This soft-touch knob has been ergonomically designed to fit in the palm of your hand.



SOLTERRA SLX

SOLTERRA SLX REELS FEATURE:

- Stainless steel main gears, pinion gears and shafts
- Single speed, High-speed and Two-speed models
- Durable corrosion-resistant frame & side plates
- Stainless steel reinforcing side plate rings
- Forged aluminum spool with line indicator rings
- Carbonite drag system with Cal's universal drag grease
- 2 thrust bearings reduce handle turning force be over 50%.
- 5BB+2TB stainless steel shielded bearings 20-50W models
- 5BB+2TB+RB stainless steel shielded bearings 10/15 models
- Double dog, silent anti-reverse on all models
- Dual anti-reverse system on all 10/15 sizes
- Ratcheting drag lever for precise drag setting
- Stainless Steel Body Armor reduces frame flex 20-50W models
- T-Bar handle design on 50W-size
- Ergo Grip comfort handle on all 10 through 30 sizes
- Low profile On/Off clicker with stainless steel wishbone
- Wide-mouth levelwind: Stainless steel with Ti coating "L" models
- High Speed 6.2:1 gear ratios on SLX-10CS and SLX-15CS
- Open top frame design on SLX-10CS and SLX-15CS



SOLTERRA SLX GRAPHITE LEVER DRAGS

Model	Gear ratios	Bearings	Weight (g)	Line retrieve (cm)	Monofilament line capacity (diameter in mm.)	Max Drag @ Strike with Freespool	Max Drag @ Full with Freespool	Frame	Sideplates	Spool	MSRP (€)
Right Handed Open Top Frame Reels											
SLX-10CS	6.0:1	5BB+2TB+1RB	660	106.7	0.40/380, 0.45/290, 0.50/230	6.8 kg	10 kg	GR	GR	AL	169.00
SLX-15CS	6.0:1	5BB+2TB+1RB	697	106.7	0.45/420, 0.50/340, 0.55/280	6.8 kg	10 kg	GR	GR	AL	169.00
Right Handed Regular Speed Reels											
SLX-20	3.5:1	5BB+2TB	984	81.3	0.50/330, 0.55/440, 0.60/370	11.8 kg	15 kg	GR	GR	AL	234.00
SLX-30	3.5:1	5BB+2TB	1017	81.3	0.50/700, 0.55/580, 0.60/490	11.8 kg	15 kg	GR	GR	AL	239.00
Right Handed Two Speed Reels											
SLX-20II	3.8:1 & 1.7:1	5BB+2TB	991	88.9 & 38.1	0.50/530, 0.55/440, 0.60/370	11.8 kg	15 kg	GR	GR	AL	269.00
SLX-30II	3.8:1 & 1.7:1	5BB+2TB	1017	88.9 & 38.1	0.50/700, 0.55/580, 0.60/490	11.8 kg	15 kg	GR	GR	AL	279.00
SLX-50WII	3.1:1 & 1.3:1	5BB+2TB	1510	81.3 & 38.1	0.70/640, 0.90/380, 1.00/310	14.5 kg	18 kg	GR	GR	AL	319.00
Right Handed Levelwind Reels											
SLX-15L	4.2:1	5BB+2TB+1RB	644	73.7	0.45/420, 0.50/340, 0.55/280	6.8 kg	10 kg	GR	GR	AL	189.00



FLY & CENTERPIN REELS

United by single action, 1:1 retrieve ratios, our Fly and Centerpin products highlight two very distinct strengths of Okuma Fishing Tackle. The first is the ability of our advanced CNC machining facility in Taiwan. From the same precision factory that makes Makaira offshore reels, comes our machined float and mooching reels. The second is our commitment to value in our die-cast aluminum product lines. You can find bigger names, but not a better product.

AIRFRAME

AIRFRAME FLY REELS FEATURE:

- Titanium reinforced graphite construction
- Large arbor reel
- Stainless steel main shaft
- Oversized disc drag with stainless steel & teflon discs
- Easy brake adjustment on the back
- Japanese one-way clutch bearing in stainless steel
- Ultra light weight
- Available 7/9 Bulk



AF-4/6

AIRFRAME

Model	Deag Washer	Bearings	Weight (g)	Line Retrieve	Fly line capacity	Frame	Spool	Spool Width	Spool Diam.	MSRP (€)
AF-4/6	-	1BB	145 g	-	WF6 + 50m	-	-	-	-	29.90
AF-7/9	-	1BB	180 g	-	WF9 + 100m	-	-	-	-	32.90

AVENTA

AVENTA FLOAT REELS FEATURE:

- Precision machined stainless steel spool shafts
- 1-piece Machined Rigid Frame construction
- Machined aluminum anodized spools
- On/Off click ratchet for added spool tension
- Ported spool with exposed rim for easy control
- 2 stainless steel Japanese ball bearings
- Available spare spool



VT-1002

Float fishing is a unique and specific technique. The center-pin crowd is dedicated, knowledgeable and passionate about their sport. They are also extremely discerning about their tackle. The introduction of the Aventa center-pin sets a new standard for what can be expected in a fully-machined float reel.

The Aventa series is made from solid aluminum bar stock, for precision spool alignment and maximum freespool. The VT-1002, with two stainless steel ball bearings, is excellent for casting directly from the reel or for drag-free drifts.

AVENTA

Model	Bearings	Weight (g)	Line Retrieve	Line capacity (yds/lbs)	Frame	Spool	Spool Width	Spool Diam.	MSRP (€)
Centerpin Float Reel									
VT-1002	2 BB	233	13"	275/-yds / 8-lbs	AL	AL	18.5mm	114mm	239.00

Helios SX

HELIOS SX FLY REELS FEATURE:

- Machined aluminum and anodized frame and spool design
- Multi-disk Japanese felt drag washers provide incredible smoothness
- Hydro Block watertight drag seal protects the drag system
- 2BB + 1RB stainless steel bearing drive system
- Easy-to-change left to right hand retrieval conversion



HSX-5/6

HELIOS SX

Model	Deag Washer	Bearings	Weight (g)	Line Retrieve	Fly line capacity	Frame	Spool	Spool Width	Spool Diam.	MSRP (€)
HSX-4/5	Felt	2BB + 1RB	153	9.6"	WF4F + 110-yds/20-lbs	AL	AL	20mm	85mm	97.00
HSX-5/6	Felt	2BB + 1RB	173	11.7"	WF5F + 150-yds/20-lbs	AL	AL	20mm	102mm	109.00
HSX-7/8	Felt	2BB + 1RB	179	12.1"	WF7F + 200-yds/20-lbs	AL	AL	25mm	105mm	113.00
HSX-8/9	Felt	2BB + 1RB	198	13.4"	WF8F + 200-yds/20-lbs	AL	AL	25mm	115mm	121.00
HSX-10/11	Felt	2BB + 1RB	218	15.3"	WF10F + 200-yds/30-lbs	AL	AL	25mm	131mm	134.00

SLV

SLV FLY REELS FEATURE:

- Lightweight graphite construction
- 4-piece rod design
- Titanium Oxide stripper guide
- Stainless steel snake guides
- Aluminum pipe reel seat with aluminum hoods
- Through-blank carbon fiber construction
- Okuma rod bag



SLV 5/6 b

SLV

Model	Line Weight	Bearings	Weight (g)	Line Retrieve	Fly line capacity	Frame	Spool	Spool Width	Spool Diam.	MSRP (€)
SLV 2/3b	2,3 wt.	1RB	128	8"	WF-2, 50yds/12lbs	AL	AL	22mm	66mm	45.00
SLV 4/5b	4,5 wt.	1RB	136	9"	WF-4, 95yds/12lbs	AL	AL	24mm	75mm	46.00
SLV 5/6b	5,6 wt.	1RB	150	10"	WF-5, 140yds/20lbs	AL	AL	28mm	82mm	47.00
SLV 7/8b	7,8 wt.	1RB	156	11"	WF-7, 145yds/20lbs	AL	AL	31mm	88mm	49.00
SLV 8/9b	8,9 wt.	1RB	173	12"	WF-8, 150yds/30lbs	AL	AL	34mm	95mm	51.00
SLV-10/11b	10,11 wt.	1RB	275	13"	WF-10, 520yds/30lbs	AL	AL	40mm	114mm	54.00

SHEFFIELD

SHEFFIELD CENTERPIN REELS FEATURE:

- Unbelievably smooth bearings
- Zero drag
- Traditional design
- 4.5 diameter ultra-smooth running centre pin
- Stainless steel shaft
- One piece machine cut aluminium frame
- One piece machine cut aluminium spool
- 2 German HPB stainless ball bearings
- On/off ratchet
- Neoprene reel pouch included



SHEFFIELD

Model	Line Weight	Bearings	Weight (g)	Line Retrieve	Fly line capacity	Frame	Spool	Spool Width	Spool Diam.	MSRP (€)
S-1002	-	2HPB	280	-	8lbs / 275yds	AL	AL	-	-	249.00



RODS

Nothing inspires the soul like a finely-crafted fishing rod. Upon picking it up, flexing the action and feeling the balance, an angler can immediately visualize the experience- working a bait, feeling the strike, the deep flex under the load of a heavy fish. While the needs of each fishery can be dramatically different, the goal is universally the same: to actively connect with nature as a participant instead of a spectator. With many hundreds of unique rod models covering unique territories, species and techniques, our development process is highly collaborative. We work with the finest anglers in a given discipline to define the performance attributes. Then we bring them to life within our cutting-edge manufacturing facility.

UFR



TECHNOLOGY

UFR

Freeing anglers from the choice between
power and sensitivity

When choosing a rod, anglers often face the trade-off between a powerful but bulky rod that can catch big-sized fish, or a sensitive but weaker rod that can sense the bite of the smallest fish. We address this challenge with a revolutionary tip: Ultimate Flex Reinforcement (UFR), which redefines the future generation of rods.

Developed using a patented manufacturing process, the UFR tip combines strength and agility like never before, marking a breakthrough. Our UFR technology endows our rods with a 300% increase in lifting capability and an ability to bend up to 360°. With longitudinal fibers around the rod blanks, our rods are more powerful, yet lighter and more flexible than traditional ones. As a result, our anglers no longer need to choose between power and sensitivity.

TECHNOLOGY

UMR

LIGHTWEIGHT STRENGTH BUILT FOR ANY CHALLENGE

Okuma's Ultimate Matrix Reinforcement (UMR) technology maximizes rod strength while minimizing weight, so you can rise to meet any challenge.

UMR 

HELIOS Air

HELIOS AIR RODS FEATURE:

- 40T+46T Toray carbon with Okuma UMR blank construction
- UMR: Ultimate Matrix Reinforcement
- New exclusive Psychedelic blank artwork
- Seaguide ONE GUIDE design, S5316 stainless steel and tangle-free guides with zirconium inserts
- Okuma Unique tooling skeleton reel seat, Japan carbon injection, with Psychedelic carbon tube body
- Durable Winn grip design
- Split grip butt design for reduced weight and improved balance
- High quality rods bag
- 2-sec all-round rods from 7'0" up to 9'0", 5-18g ultra-light up to more power predator 80-150g
- 4-sec City Park travel rods are also available



HELIOS AIR

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
Spinning Rods										
HSA-S-702M	M	7'0" / 213cm	2	7-25	45	275	7+Tip	A	110	126.90
HSA-S-802M	M	8'0" / 244cm	2	14-40	45	285	8+Tip	A	122	132.90
HSA-S-802MH	MH	8'0" / 244cm	2	20-50	45	305	8+Tip	A	128	137.90
HSA-S-802H	H	8'0" / 244cm	2	30-70	45	305	8+Tip	A	135	141.90
HSA-S-862XH	XH	8'6" / 259cm	2	50-110	70	440	8+Tip	B	158	165.90
HSA-S-902H	H	9'0" / 274cm	2	30-70	45	335	8+Tip	A	153	152.90

Helios SX

HELIOS SX RODS FEATURE:

- 30T carbon construction
- Slim blanks with fast action
- Japanese split EVA handles
- Ergonomic touch blank screw up reel seat
- CCS SIC gunsmoke guides
- Customized Okuma butt cap
- Delivered in cloth bag



Award winning Helios SX rod comes in 16 different spin models and one trigger model covering all your spinning needs from 2-8 gr 165 cm ultra light fishing to 20-60g 300cm jigging rod.



HELIOS SX

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
Spinning Rods										
HSX-S-602L	L	6'0" / 183cm	2	2-10	35	230	6+Tip	A	90	65.90
HSX-S-662ML	ML	6'6" / 198cm	2	7-18	35	260	6+Tip	A	95	68.90
HSX-S-701M	M	7'0" / 212cm	1	7-28	35	260	7+Tip	A	109	80.90
HSX-S-702L	L	7'0" / 213cm	2	4-15	35	260	7+Tip	A	95	71.90
HSX-S-702ML	ML	7'0" / 213cm	2	8-20	35	260	7+Tip	A	104	71.90
HSX-S-702M	M	7'0" / 213cm	2	10-30	35	260	7+Tip	A	118	71.90
HSX-S-742ML	ML	7'4" / 224cm	2	8-25	35	260	7+Tip	A	105	73.90
HSX-S-742M	M	7'4" / 224cm	2	12-35	35	280	7+Tip	A	116	73.90
HSX-S-742MH	MH	7'4" / 224cm	2	20-50	35	280	7+Tip	A	124	73.90
HSX-S-802ML	ML	8'0" / 244cm	2	8-25	35	280	8+Tip	A	113	79.90
HSX-S-802M	M	8'0" / 244cm	2	15-40	35	280	8+Tip	A	123	79.90
HSX-S-802MH	MH	8'0" / 244cm	2	20-50	35	280	8+Tip	A	135	79.90
HSX-S-902ML	ML	9'0" / 274cm	2	8-25	35	280	8+Tip	A	128	84.90
HSX-S-902M	M	9'0" / 274cm	2	15-45	35	280	8+Tip	A	144	84.90
HSX-S-902MH	MH	9'0" / 274cm	2	20-60	35	310	8+Tip	A	154	85.90
HSX-S-1002M	M	10'0" / 305cm	2	20-50	35	370	9+Tip	A	162	89.90
Casting Rods										
HSX-C-662ML	ML	6'6" / 198cm	2	7-18	40	275	9+Tip	B	99	72.90
HSX-C-691MH	MH	6'9" / 207cm	1	7-21	40	275	9+Tip	B	104	80.90
HSX-C-702ML-1	ML	7'0" / 212cm	2	5-25	30	265	9+Tip	B	106	179.90
HSX-C-762M-1	M	7'6" / 228cm	2	10-35	30	295	10+Tip	B	120	158.90

HELIOS

HELIOS RODS FEATURE:

- 40- Ton carbon, ultra sensitive blank construction
- Rods starting as light as 3.5 ounces
- Casting "CM" rods feature ALPS Mini Guide System
- Casting "C" rods feature traditional ALPS guide sizing
- All casting models feature hard Zirconium inserts for braided line
- Spinning "SKR" rods feature Fuji's KR "Rapid Choke" guides.
- Fuji's KR frames feature a tangle free sloped ring design
- SKR rods feature Fuji Alconite guide inserts for braided line
- Zero foregrip design for improved balance and weight reduction
- Lightweight skeleton reel seats on both spinning and casting
- Split grip butt design for reduced weight and improved balance
- Fuji moveable hook keeper for precise keeper placement



HELIOS

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
Helios Traditional Sized Casting Rods										
HS-C-661ML	ML	6'6" / 198cm	1	7-20	N/A	25mm	7+Tip	A	89	184.90
Helios Traditional Sized Spinning Rods										
HS-S-661ML	ML	6'6" / 198cm	1	7-20	N/A	25mm	7+Tip	B	92	196.90

ONE.rod

ONE RODS FEATURE:

- Ultra light 40T carbon blank construction
- Fuji anti-tangle stainless steel guides frame
- Fuji Alconite guide inserts reduce friction
- Fuji mini split reel seat
- Okuma carbon cone handle design
- High quality cloth bag package



ONE ROD

Model	Rod Power	Length	Sections	Casting Wt. (g)	Foregrip length	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
Casting Rods										
OR-C-661ML	ML	6'6" / 198cm	1	7-20	N/A	300	9+Tip	B	86	147.90
OR-C-661M	M	6'6" / 198cm	1	10-30	N/A	300	9+Tip	B	92	153.90
Spinning Rods										
OR-S-661ML	ML	6'6" / 198cm	1	7-20	N/A	280	7+Tip	A	82	157.90
OR-S-661M	M	6'6" / 198cm	1	10-30	N/A	280	7+Tip	A	89	163.90
OR-S-661MH	MH	6'6" / 198cm	1	15-45	N/A	280	7+Tip	A	95	167.90



INSPIRA

INSPIRA RODS FEATURE:

- 30-Ton ultra-light carbon black construction
- Fuji stainless steel top with Alconite inserts
- Seaguide XO anti-tangle 316-stainless steel guides
- Okuma tooling reel seat with Fuji cushioned stainless steel Hood
- Okuma carbon cone concept handle
- Durable EVA with flat aluminum end cap improved balance
- High quality cloth bag packake



INSPIRA

Model	Rod Power	Length	Sections	Casting Wt. (g)	Foregrip length	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
ISP-S-662UL	UL	6'6" / 198cm	2	0-7	N/A	260	7+Tip	128	119.90
ISP-S-762UL	UL	7'6" / 229cm	2	2-12	N/A	290	8+Tip	142	122.90



EPIXOR

EPIXOR RODS FEATURE:

- Unique use of Bopp (Biaxially Oriented Polypropylene) Blank protect Film
- Bopp are a 2 way stretch film, which protect the carbon blank from damage, during use and transportation
- Bopp can be recycled
- 30/36-Ton carbon, ultra-light, slim and balanced blanks
- Seaguide XO anti-tangle 316-stainless steel guides
- Zirconium guides inserts reduce friction from braided lines
- Unique light weight ergonomic touch blank reel seats
- AAA cork quality handles
- Durable rubber cork end cap for the balance
- Luxury velvet rod bag



EPIXOR

Model	Rod Power	Length (cm)	Sections	Casting Wt.(g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Spinning Rods									
EPI-S-662L-1	L	198	2	2-12	40	250	6+Tip	97	69.90
EPI-S-702L-1	L	210	2	3-18	40	250	7+Tip	104	71.90
EPI-S-742M-1	M	223	2	10-32	40	270	7+Tip	121	73.90
EPI-S-802L-1	L	240	2	5-20	40	290	7+Tip	123	74.90
EPI-S-822ML-1	ML	249	2	10-32	40	290	7+Tip	138	78.90
EPI-S-862M-1	M	258	2	15-40	40	300	8+Tip	154	81.90
EPI-S-902L-1	L	270	2	5-25	40	340	8+Tip	137	82.90
EPI-S-902MH-1	MH	270	2	30-70	40	340	8+Tip	189	101.90
EPI-S-922ML-1	ML	276	2	10-32	40	340	8+Tip	158	85.90
EPI-S-962M-1	M	288	2	15-50	40	350	8+Tip	188	90.90
EPI-S-1002ML-1	ML	300	2	10-40	40	380	8+Tip	187	91.90
EPI-S-1154ML	ML	345	2	10-40	40	455	10+Tip	242	108.90
EPI-S-1153M-1	M	345	3	20-50	40	455	10+Tip	236	104.90



EPIXOR Travel rods

EPIXOR TRAVEL RODS FEATURE:

- Unique use of Bopp (Biaxially Oriented Polypropylene) Blank protection Film
- Bopp is a 2 way stretch film, that protect the carbon blank from damage, during use and transportation
- Bopp can be recycled
- Slim, Light and Balanced blanks
- 30 and 36T Korean carbon material
- Unique Light weight ergonomic touch blank reel seats
- AAA grade cork handles
- Coil control guide system



EPIXOR TRAVEL ROD

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
EPI-S-904L	L	270	4	7-24	40	340	8+Tip	143	92.90
EPI-S-964ML	ML	288	4	10-32	40	350	8+Tip	170	98.90
EPI-S-1004ML	ML	300	4	10-36	40	380	8+Tip	199	103.90

PRO PERCH

PRO PERCH RODS FEATURE:

- Ultra-light 30T high modulus carbon blank construction.
- Stainless steel frame SIC guide.
- View blank screw down reel seat.
- 3 split EVA handle with rubber cork inserts.
- High quality cloth bag.



PRO PERCH

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Spin										
PPE-S-701L	L	7'0" / 212cm	1	5-18	N/A	60	80	7+Tip	86	129.90

PRO CRANK

PRO CRANK RODS FEATURE:

- Ultra-light 30T high modulus carbon blank construction.
- Stainless steel frame SIC guide.
- View blank screw down reel seat.
- 3 split EVA handle with rubber cork inserts.
- High quality cloth bag.



PRO CRANK

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Spin										
PCR-S-832L	L	8'3" / 251cm	2	5-15	N/A	60	80	8+Tip	108	99.90

PCH AIR

PCH AIR SPIN RODS FEATURE:

- 40T Toray carbon, ultra-light and responsive blank construction.
- New exclusive psychedelic blank artwork.
- Fuji K-concept tangle free stainless steel guides.
- Fuji Alconite inserts reduce friction.
- Okuma unique tooling skeleton reel seat, Japan carbon injection.
- Durable 3A high quality EVA grip design.
- Split grip butt design for reduced weight and improved balance.
- High quality rod bag.



PCH AIR

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Spin										
PCHA-S-692M	M	6'9"/204cm	2	5-21	35	100	70	7+Tip	125	97.90
PCHA-S-701MH	MH	7'0"/212cm	1	7-28	35	100	70	7+Tip	124	106.90
PCHA-S-702MH	MH	7'0"/212cm	2	7-28	35	100	70	7+Tip	134	106.90
PCHA-S-762M	M	7'6"/228cm	2	5-21	35	100	70	8+Tip	136	107.90
PCHA-S-762MH	MH	7'6"/228cm	2	7-28	35	100	70	8+Tip	149	109.90
PCHA-S-802M	M	8'0"/243cm	2	7-28	35	100	70	8+Tip	146	111.90
PCHA-S-802MH	MH	8'0"/243cm	2	15-40	35	100	70	8+Tip	154	111.90
PCHA-S-802XH	XH	8'0"/243cm	2	30-80	35	100	70	8+Tip	175	111.90

SPECIALIST HEAVY

SPECIALIST HEAVY RODS FEATURE:

- 24T GT blank construction
- Gunsmoke double leg SIC guides
- Okuma graphite reel seat with cushions and hoods
- Supplied cloth rod bag



SPECIALIST HEAVY

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip (mm)	Reargrip Length (mm)	Number of Guide	MSRP (€)
Spin									
SPH-S-902MH	MH	9'0"/274cm	2	up to 90	130	N/A	295	6+Tip	77.90
SPH-S-902H	H	9'0"/274cm	2	up to 120	130	N/A	295	6+Tip	80.90



PSYCHO - PERCH SPIN

PSYCHO PERCH SPIN RODS FEATURE:

- Ultra-light high modulus carbon blank construction
- UFR: Ultimate Flex Reinforced rod tip technology
- New exclusive psychedelic blank artwork
- CCS Seaguide, 316 stainless steel frame SIC guide
- View blank screw down reel seat
- 3 split EVA handle with rubber cork inserts
- Covering all European styles of perch fishing
- High quality cloth bag



PSYCHO PERCH

Model	Rod Power	Length (cm)	Sections	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
UFR SPIN										
PSY-S-632UL	UL	190	2	1-8	25	235	7+Tip	A	78	67.90
PSY-S-632L	L	190	2	2-12	25	235	7+Tip	A	81	67.90
PSY-S-632ML	ML	190	2	3-18	25	235	7+Tip	A	84	67.90
PSY-S-732L	L	220	2	3-18	25	235	8+Tip	A	90	73.90
PSY-S-732ML	ML	220	2	4-24	25	235	8+Tip	A	96	73.90
PSY-S-732M	M	220	2	7-32	25	235	8+Tip	A	102	73.90
PSY-S-772UL	UL	230	2	1-8	25	235	9+Tip	A	93	74.90
PSY-S-772L	L	230	2	2-12	25	235	9+Tip	A	99	74.90
PSY-S-772ML	ML	230	2	3-18	25	235	9+Tip	A	105	76.60
SPIN SOLID TIP										
PSY-S-632ULa	UL	190	2	1-8	25	235	7+Tip	A	81	67.90
PSY-S-732La	L	220	2	3-18	25	235	8+Tip	A	94	72.90
PSY-S-772ULa	UL	230	2	1-8	25	235	9+Tip	A	101	75.90
PSY-S-772La	L	230	2	2-12	25	235	9+Tip	A	106	74.90
PSY-S-892La	L	267	2	2-12	25	235	10+Tip	A	118	81.90
UFR CASTING										
PSY-C-732ML	ML	230	2	4-24	25	275	10+Tip	B	106	78.90
PSY-C-732M	M	230	2	7-32	25	275	10+Tip	B	115	79.90

PREDATOR CLASSIC PRO 2

PREDATOR CLASSIC PRO 2 & CLASSIC PRO RODS FEATURE:

- Super strong composite & graphite blank construction.
- Double leg SIC guides.
- Full EVA handle with Rubber cork top ring.
- Strong Okuma graphite reel seat with cushions and hoods.
- Soft ABS gimbal on boat models.
- Supplied cloth rod bag



PREDATOR CLASSIC PRO 2

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
PCP-S-1102M	M	11'0" / 330cm	2	up to 100	70	N/A	370	8+Tip	385	71.90

PREDATOR CLASSIC PRO

PREDATOR CLASSIC PRO

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
PC-S-1102H	H	11'0" / 330 cm	2	up to 120	70	N/A	370	8+Tip	381	56.90

BEATER TOURNAMENT

BEATER TOURNAMENT SPIN RODS FEATURE:

- Ultra-sensitive and responsive carbon blank construction
- Quality stainless steel frame guides
- Polished Titanium Oxide guide inserts
- Okuma tooling split reel seat with cushioned stainless steel hood
- EVA split grip and EVA fore grip for reduced weight and feel
- Fore grip specifically designed so reel seat threads are not exposed
- Supplied in rod bag



BEATER TOURNAMENT SPIN

Model	Rod Power	Length	Casting Wt. (g)	Sections	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
BT-S-602M	M	6'0" / 182cm	4-18	2	33	280	6+Tip	116	72.90
BT-S-662M	M	6'6" / 198cm	7-21	2	33	280	6+Tip	123	75.90
BT-S-702M	M	7'0" / 212cm	10-28	2	33	315	6+Tip	129	77.90

ALTERA

ALTERA RODS FEATURE:

- 24T carbon construction
- Slim blanks with fast action
- Japanese split EVA handles
- Ergonomic touch blanks reel seat
- Quality SIC gunsmoke frame guides
- Delivered in cloth bag



ALTERA

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Spin									
ALT-S-502UL	UL	150	2	2-7	33	205	5+Tip	82	39.90
ALT-S-562L	L	165	2	3-8	33	235	5+Tip	87	39.90
ALT-S-602UL	UL	180	2	2-7	33	245	5+Tip	93	41.90
ALT-S-602L	L	180	2	4-12	33	245	5+Tip	96	41.90
ALT-S-602ML	ML	180	2	5-20	33	245	5+Tip	98	41.90
ALT-S-662ML	ML	195	2	7-22	33	260	5+Tip	107	44.90
ALT-S-662M	M	195	2	10-30	33	260	5+Tip	110	44.90
ALT-S-662MH	MH	195	2	15-40	33	260	5+Tip	115	44.90
ALT-S-662H	H	195	2	25-70	33	260	6+Tip	130	44.90
ALT-S-702ML	ML	210	2	5-20	33	265	6+Tip	116	46.90
ALT-S-702M	M	210	2	10-30	33	265	6+Tip	118	46.90
ALT-S-702MH	MH	210	2	15-40	33	265	6+Tip	127	46.90
ALT-S-702H	H	210	2	20-60	33	275	6+Tip	135	46.90
ALT-S-742ML	ML	228	2	8-25	33	275	6+Tip	116	48.90
ALT-S-742M	M	228	2	12-35	33	275	6+Tip	119	48.90
ALT-S-742MH	MH	228	2	20-40	33	275	6+Tip	130	48.90
ALT-S-802ML	ML	240	2	7-28	33	285	7+Tip	129	52.90
ALT-S-802M	M	240	2	15-40	33	285	7+Tip	135	52.90
ALT-S-802MH	MH	240	2	20-45	33	285	7+Tip	144	54.90
ALT-S-802H	H	240	2	30-80	33	340	7+Tip	152	54.90
ALT-S-902ML	ML	270	2	5-25	33	285	7+Tip	147	58.90
ALT-S-902M	M	270	2	15-40	33	285	7+Tip	149	58.90
ALT-S-902MH	MH	270	2	20-80	33	360	7+Tip	164	62.90
ALT-S-902H	H	270	2	30-100	33	360	7+Tip	176	62.90
ALT-S-1002MH	MH	300	2	25-70	33	415	8+Tip	187	64.90
Spin Fuji Guide									
ALT-S-742MH-1	MH	223	2	15-40	33	275	6+Tip	122	54.90
ALT-S-802MH-1	MH	240	2	15-40	33	285	7+Tip	131	58.90
ALT-S-902MH-1	MH	270	2	15-60	33	360	7+Tip	142	61.90
ALT-S-1002MH-1	MH	300	2	25-70	33	415	8+Tip	180	68.90
Slow Jig									
ALT-S-631MH PE3	MH	193	1	120-250	50	405	7+Tip	155	67.90

ALTERA

ALTERA TRAVEL RODS FEATURE:

- 24T carbon blank construction
- 4-pc travel rod concept
- Fast action
- Matt gunsmoke frame SIC K-type guides
- Japanese Split EVA handle
- Modern Ergonomic touch blanks reel seat
- Supplied with a quality rod bag



ALTERA

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
Travel Spin										
ALT-S-704MH	MH	213	4	15-40	35	275	6+Tip	A	129	57.90
ALT-S-704H	H	213	4	20-60	35	285	6+Tip	A	138	59.90
ALT-S-704XH	XH	213	4	30-80	35	285	6+Tip	A	145	62.90
ALT-S-804H	H	244	4	40-80	35	350	7+Tip	A	167	65.90

ALARIS

ALARIS RODS FEATURE:

- 24T Korean carbon blank construction
- Light weight SIC guide system
- Ergonomic, touch blank reel seat
- FC-Full cork handles
- Japanese split handle style
- Supplied in rod bag



ALARIS

Model	Rod Power	Length (cm)	Sections	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
Casting										
ALA-C-632M	M	190	2	10-32	50	300	8+Tip	A	123	49.90
Spinning										
ALA-S-602L	L	182	2	2-7	40	240	4+Tip	B	102	39.90
ALA-S-612ML	ML	185	2	5-15	40	260	4+Tip	B	103	39.90
ALA-S-632M	M	190	2	10-32	40	290	4+Tip	B	119	39.90
ALA-S-712M	M	215	2	10-32	40	290	4+Tip	B	118	42.90
ALA-S-712ML	ML	215	2	5-22	40	290	4+Tip	B	147	42.90
ALA-S-742M	M	223	2	10-32	40	310	4+Tip	B	133	44.90
ALA-S-742MH	MH	223	2	15-40	40	330	4+Tip	B	146	44.90
ALA-S-822ML	ML	248	2	10-32	40	330	5+Tip	B	183	49.90
ALA-S-862MH	MH	259	2	20-60	40	380	5+Tip	B	221	54.90
ALA-S-902ML	ML	274	2	7-28	40	380	5+Tip	B	182	56.90
ALA-S-1012M	M	307	2	15-45	40	410	5+Tip	B	216	63.90

ALARIS

ALARIS ROD FEATURE:

- 24T carbon construction
- Slim blanks with fast action
- SCT Solid Carbon Tip on Light Jig versions
- Rubber cork butt
- Ergonomic touch reel seat
- CCS SIC gunsmoke guides
- Delivered in cloth bag



ALARIS

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Light Jig Spin									
ALS-S-802UL	UL	240	2	up to 12	40	240	7+Tip	131	57.90
ALS-S-902UL	UL	270	2	up to 15	40	250	8+Tip	151	61.90
Soft Lure Spin									
ALS-S-802L	L	240	2	5-15	40	240	7+Tip	134	54.90
ALS-S-802ML	ML	240	2	7-25	40	240	7+Tip	138	56.90
ALS-S-902L	L	270	2	5-15	40	250	8+Tip	154	58.90
ALS-S-902ML	ML	270	2	7-28	40	300	8+Tip	160	59.90
Zander Spin									
ALS-S-802M	M	240	2	10-35	40	260	7+Tip	148	59.90
ALS-S-902M	M	270	2	10-35	40	300	8+Tip	173	64.90

COMPETITION

COMPETITION RODS FEATURE:

- 24T carbon blank construction
- Stainless steel guide frames
- Durable titanium oxide guide inserts
- Stainless steel hooded reel seat with Okuma tooling logo
- Split grip butt design for reduced weight and improved balance
- Comfortable EVA fore and rear grips
- Stainless steel hook keeper



COMPETITION

Model	Rod Power	Length	Sections	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
Spinning Rods										
CM-S-602UL	UL	6'0" / 183cm	2	2-8	35	200	5+Tip	A	98	31.90
CM-S-602M	M	6'0" / 183cm	2	8-25	35	200	5+Tip	A	112	32.90
CM-S-662M	M	6'6" / 198cm	2	10-30	35	225	5+Tip	A	123	35.90
CM-S-702M	M	7'0" / 213cm	2	10-30	35	240	6+Tip	A	136	38.90
CM-S-762ML	ML	7'6" / 229cm	2	8-25	35	260	7+Tip	A	140	39.90
CM-S-802ML	ML	8'0" / 244cm	2	10-30	50	310	7+Tip	A	152	44.90
CM-S-802M	M	8'0" / 244cm	2	15-40	50	310	7+Tip	A	157	45.90
CM-S-902M	M	9'0" / 274cm	2	20-50	50	360	8+Tip	A	179	52.90
CM-S-902MH	MH	9'0" / 274cm	2	20-80	50	360	8+Tip	A	186	58.90

HEXANA II

HEXANA II RODS FEATURE:

- The update version of Hexana rods
- Ultra-responsive 30T carbon blank construction
- Seaguide quality gunsmoke frame guides
- Polished titanium oxide inserts reduce friction
- Graphite screw down reel seat with cushions
- 3 split EVA handles design
- Rubber butt cap with Okuma logo
- Cloth bag included



HEXANA II

Model	Rod Power	Length	Casting Wt. (g)	Sections	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
HXII-S-802L	L	8'0" / 240cm	5-20	2	50	100	7+Tip	137	69.90
HXII-S-802M	M	8'0" / 240cm	10-36	2	50	100	7+Tip	146	71.90

HEXANA

HEXANA RODS FEATURE:

- 24T carbon blank construction.
- Seaguide quality gunsmoke frame guides.
- Polished titanium oxide inserts reduce friction.
- Graphite screw down reel seat with cushions
- 3 split EVA handles design
- Cloth bag included



HEXANA

Model	Rod Power	Length	Casting Wt. (g)	Sections	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
HX-S-702ML	ML	7'0" 212cm	5-20	2	50	100	7+Tip	126	54.90
HX-S-802M	M	8'0" 243cm	10-36	2	50	100	7+Tip	141	62.90

LRF

LRF RODS FEATURE:

- OKUMA Patent UFR Technology on the Tip blank, increased rod's sensitive tip, lifting power and maximum strength
- Seaguide unique XO guides, SS316 frame and SIC inserts
- Line Flow Tapered Micro Guide system
- Deluxe Okuma gold label reel seat
- Spiral Carbon tape design on the Butt section, improved strength, durability, and highlighted the whole rod
- Split grip butt design for reduced weight and improved balance



LRF

Model	Rod Power	Length	Sections	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
Spin										
LRF-S-702UL	UL	7'0" / 212cm	2	1-8	35	235	8+Tip	A	92	64.90
LRF-S-762UL	UL	7'6" / 228cm	2	1-9	35	235	8+Tip	A	95	67.90
Dropshot										
LRF-S-802M	M	8'0" / 240cm	2	5-25	35	290	9+Tip	A	107	70.90
LRF-S-702MH	MH	7'0" / 212cm	2	10-50	35	250	8+Tip	A	113	71.90
Carolina										
LRF-S-802MH	MH	8'0" / 240cm	2	7-35	35	295	9+Tip	A	119	76.90



G-Control

G-CONTROL RODS FEATURE:

- Ultra-light high modulus carbon blank construction
- UFR sensitive tip and crossed carbon thread improve lifting power and maximum strength
- All rods have been designed for specific trout fishing
- Seaguide XO anti-tangle 316-stainless steel guides
- Zirconium guides inserts reduce friction
- Light weight ergonomic touch blank reel seats
- Ergonomic shaped, hard EVA handles
- EVA split grip and EVA fore grip for reduced weight and feel
- High quality cloth bag package



G-CONTROL

Model	Rod Power	Length	Sections	Casting Wt. (g)	Foregrip Length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
GCT-S-612XUL	XUL	6'2" / 188cm	2	0.6-3	35	150	6+Tip	73	71.90
GCT-S-622UL	UL	6'2" / 188cm	2	0.6-3	35	175	7+Tip	78	73.90
GCT-S-622L	L	6'2" / 188cm	2	1-4	35	175	7+Tip	80	75.90
GCT-S-702L	L	7'0" / 213cm	2	1-8	35	225	8+Tip	86	78.90
GCT-S-802L	L	8'0" / 244cm	2	1-8	35	245	9+Tip	97	84.90



DEAD RINGER

DEAD RINGER RODS FEATURE:

- Light weight 24T carbon Blank construction
- Japanese Split handles style
- Combines quality Cork and hard EVA handles
- Soft pawn grip
- Quality reel seat
- Light weight SIC Guides
- Supplier in rod bag



DEAD RINGER

Model	Rod Power	Length	Sections	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Spinning									
DR-S-602UL	UL	6'0" / 180cm	2	0-7	40	80	8+Tip	106	42.90
DR-S-702UL	UL	7'0" / 210cm	2	2-12	40	80	8+Tip	109	46.90
DR-S-802UL	UL	8'0" / 240cm	2	3-15	40	80	9+Tip	126	49.90
Trout									
DR-S-702UL TROUT	UL	7'0" / 210cm	2	1-5	40	80	8+Tip	102	48.90
DR-S-762UL TROUT	UL	7'6" / 225cm	2	2-7	40	80	8+Tip	108	50.90

SEATROUT SPIN

SEATROUT RODS FEATURE:

- 30-Ton Ultra-responsive blank construction
- Seaguides XO anti-tangle 316-stainless steel guides
- Foregrip specially designed so reel seat threads are not exposed
- EVA split grip and fore grip for reduced weight and feel
- Supplied cloth rod bag



SEATROUT SPIN

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
SEA-S-802M	M	8'0" / 240cm	2	10-30	60	N/A	340	7+Tip	133	73.90
SEA-S-902M	M	9'0" / 270cm	2	10-30	60	N/A	395	8+Tip	160	80.90

AZAKI

AZAKI FEATURE:

- 2 4T Carbon EPC process
- Same blank as Altera
- 3 split handle EVA & Cork
- SIC guides silver frame
- Graphite screw down reel seat with cushions
- Designed to match Azaki spinning reels
- Supplied with a quality rod bag



AZAKI

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Spin									
AZK-S-602ML	ML	183	2	4-12	40	235	5+Tip	88	36.90
AZK-S-662L	L	198	2	7-22	40	255	5+Tip	94	39.90
AZK-S-702ML	ML	213	2	5-20	40	270	6+Tip	104	42.90
AZK-S-702M	M	213	2	10-30	40	270	6+Tip	108	42.90
AZK-S-762ML	ML	228	2	8-25	40	270	6+Tip	112	45.90
AZK-S-762M	M	228	2	12-35	40	270	6+Tip	118	46.90
AZK-S-802ML	ML	244	2	7-28	40	290	7+Tip	121	47.90
AZK-S-802M	M	244	2	12-35	40	290	7+Tip	124	49.90
AZK-S-902ML	ML	274	2	7-28	40	290	7+Tip	130	53.90
AZK-S-902M	M	274	2	12-35	40	290	7+Tip	138	54.90
AZK-S-902H	H	274	2	20-60	40	370	7+Tip	165	57.90
AZK-S-962ML	ML	286	2	7-28	40	350	9+Tip	143	59.90
AZK-S-1002ML	ML	305	2	10-30	40	350	9+Tip	158	63.90
LRF Spin									
AZK-S-762L-1	L	228	2	3-12	40	270	6+Tip	107	45.90

Pink Pearl V2

PINK PEARL V2 FEATURE:

- 24T carbon construction
- SIC guides silver frame
- Modern graphite screw reel seat
- Okuma butt cap logo
- Designed to match to Pink Pear V2 reels
- Supplied with a quality rod bag



PINK PEARL V2

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
PP-S-712ML V2	ML	213	2	5-20	35	260	6+Tip	124	59.90
PP-S-822M V2	M	249	2	10-32	35	280	7+Tip	168	59.90
V1									
PP-S-712ML	ML	215	2	5-20	60	270	7+Tip	129	59.90
PP-S-822M	M	249	2	10-32	60	270	7+Tip	174	59.90

SAFINA X-RODS

SAFINA-X RODS FEATURE:

- 24T GT blank construction
- Gunsmoke frame SIC guides
- Special shaped reel seat
- 3 Split EVA handle to reduce the weight and good balance
- Quality rod bag



SAFINA-X TELE CARP RODS FEATURE:

- Light weight 24T carbon blank
- Gunsmoke frame SIC guides
- Okuma graphite reel seat
- Slim shrink EVA handle

SAFINA-X

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
SX-S-602MH	MH	6'0" 182cm	2	10-30	65	100	120	6+Tip	127	45.90
SX-S-702ML	ML	7'0" 212cm	2	5-20	65	100	120	7+Tip	152	48.90
SX-S-702M	M	7'0" 212cm	2	10-30	65	100	120	7+Tip	128	49.90
SX-S-702MH	MH	7'0" 212cm	2	15-40	65	100	120	7+Tip	150	49.90
SX-S-802ML	ML	8'0" 243cm	2	5-20	65	100	120	7+Tip	161	52.90
SX-S-802M	M	8'0" 243cm	2	10-36	65	100	120	7+Tip	172	52.90
SX-S-902ML	ML	9'0" 274cm	2	5-20	65	100	120	8+Tip	183	56.90
SX-S-902M	M	9'0" 274cm	2	10-35	65	100	120	8+Tip	195	57.90
SX-S-1002ML	ML	10'0" 303cm	2	10-35	65	100	120	9+Tip	210	62.90
Tele Carp										
SX-CA-1207H-T	H	12'0" 360cm	7	3.5lbs	N/A	N/A	140	5+Tip	347	88.90
SX-CA-1307H-T	H	12'0" 360cm	7	3.5lbs	N/A	N/A	140	5+Tip	368	97.90

HOT ROD SPIN

HOT ROD SPIN RODS FEATURE:

- High modulus ultra-light carbon blank construction.
- Quality stainless steel frame guides.
- Special cuffed stainless steel inserts, no popping off.
- EVA split grip and fore grip for reduced weight and feel
- Foregrip specially designed so reel seat threads are not exposed

HOT ROD SPIN

Model	Rod Power	Length	Sections	Lure Wt. (lbs)	Middlegrip	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
HR-S-602M	M	6'0" 180cm	2	6-15	N/A	35	310	5+Tip	110	33.90
HR-S-702M	M	7'0" 210cm	2	6-15	N/A	35	310	6+Tip	131	35.90
HR-S-802M	M	8'0" 240cm	2	8-17	N/A	35	310	7+Tip	153	38.90

ARIA

ARIA RODS FEATURE:

- 24T GT blank construction.
- Light weight SIC guide system
- Polished titanium oxide guide inserts
- Okuma graphite reel seat
- Shaped full EVA handle style
- Cloth bag included



ARIA

Model	Rod Power	Length	Sections	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
Spinning Rods										
ARA-702UL	UL	7'0" / 210cm	2	5-20	30	265	4+Tip	A	114	27.90
ARA-702M	M	7'0" / 210cm	2	10-35	30	265	4+Tip	A	199	29.90
ARA-802ML	ML	8'0" / 240cm	2	10-30	30	315	5+Tip	A	186	32.90
ARA-802M	M	8'0" / 240cm	2	15-40	30	315	5+Tip	A	225	39.90
ARA-902H	H	9'0" / 270cm	2	20-60	30	375	5+Tip	A	287	44.90
ARA-902MH	MH	9'0" / 270cm	2	20-60	30	375	5+Tip	A	306	42.90

Fuel Spin

FUEL SPIN RODS FEATURE:

- 24T GT blank construction
- Fast action
- Complete range with 16 lengths and CW possible
- Motor sports design inspiration
- Pure energy for fishing
- 3 Split EVA handle to reduce the weight and good balance
- Stainless steel frame SIC guides
- Graphite cushions reel seat
- Designed to match Okuma Fuel Spin reels



FUEL SPIN

Model	Rod Power	Length (cm)	Sections	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
FSP-S-602L	L	183	2	2-10	35	220	5+Tip	99	28.90
FSP-S-602M	M	183	2	5-20	35	230	5+Tip	100	28.90
FSP-S-662L	L	197	2	3-15	35	235	5+Tip	105	28.90
FSP-S-662ML	ML	197	2	7-22	35	245	5+Tip	107	28.90
FSP-S-662M	M	197	2	10-30	35	255	5+Tip	113	30.90
FSP-S-702UL	UL	213	2	0-8	35	265	6+Tip	103	30.90
FSP-S-702L	L	213	2	5-20	35	265	5+Tip	111	30.90
FSP-S-702M	M	213	2	10-30	35	270	6+Tip	125	30.90
FSP-S-762UL	UL	228	2	2-12	35	280	7+Tip	108	30.90
FSP-S-802L	L	243	2	5-25	35	295	7+Tip	140	32.90
FSP-S-802M	M	243	2	15-40	35	310	7+Tip	149	32.90
FSP-S-802H	H	243	2	30-80	35	340	7+Tip	173	34.90
FSP-S-902L	L	274	2	7-30	35	300	7+Tip	165	35.90
FSP-S-902M	M	274	2	20-50	35	310	7+Tip	179	37.90
FSP-S-902H	H	274	2	30-100	35	360	7+Tip	209	40.90

Wave Power

WAVE POWER RODS FEATURE:

- 24T GT blank construction
- Fast action
- Stainless steel frame SIC guides
- 3 Split EVA handle to reduce the weight and good balance
- Graphite cushions reel seat
- Telescopic version available
- Designed to match Okuma Aria spin reels



WAVE POWER

Model	Rod Power	Length (cm)	Sections	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
Spinning Rods										
WP-S-602L	L	183	2	2-10	35	220	5+Tip	B	100	26.90
WP-S-602M	M	183	2	5-20	35	230	5+Tip	B	102	27.90
WP-S-662L	L	197	2	3-15	35	245	5+Tip	B	104	27.90
WP-S-662M	M	197	2	10-30	35	255	5+Tip	B	108	29.90
WP-S-702UL	UL	213	2	0-8	35	240	6+Tip	B	103	28.90
WP-S-702L	L	213	2	4-15	35	240	6+Tip	B	112	28.90
WP-S-702M	M	213	2	10-30	35	270	6+Tip	B	120	30.90
WP-S-702H	H	213	2	20-60	35	280	6+Tip	B	132	31.90
WP-S-802L	L	244	2	5-25	35	295	7+Tip	B	136	31.90
WP-S-802M	M	244	2	15-40	35	310	7+Tip	B	147	32.90
WP-S-902L	L	274	2	7-30	35	300	7+Tip	B	163	34.90
WP-S-902M	M	274	2	20-50	35	310	7+Tip	B	173	36.90
WP-S-902H	H	274	2	30-100	35	310	7+Tip	B	201	39.90
Tele Spin										
WP-S-605M-T	M	183	5	5-20	35	235	4+Tip	B	101	28.90
WP-S-705M-T	M	213	5	10-30	35	250	4+Tip	B	108	29.90
WP-S-806M-T	M	244	6	15-40	35	265	5+Tip	B	143	34.90

Light Range Fishing

Okuma have patented the UFR technology – that truly gives an amazing performance on the light range fishing rods.

LIGHT RANGE FISHING RODS FEATURE:

- Light weight 24T carbon material
- Japanese EVA split handle construction
- Okuma quality reel seat
- CCS SIN shooting guides
- Okuma UFR tip strength
- Cloth bag included



UFR

LIGHT RANGE FISHING

Model	Rod Power	Length	Sections	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Spinning									
LRF-S-612L-1	L	6'1" / 185cm	2	1-7	35	245	7+Tip	80	57.90
LRF-S-712ML-1	ML	7'1" / 216cm	2	3-12	35	245	8+Tip	98	62.90
LRF-S-812ML-1	ML	8'1" / 246cm	2	8-22	35	295	9+Tip	129	67.90

G-power

G-POWER SPIN RODS FEATURE:

- Fast action blank construction
- FPS graphite reel seat
- High Quality guides
- Gimbal butt cap



G-POWER SPIN

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
SPIN									
GP-S-702M	M	7'0"/210cm	2	10-35	60	290	4+Tip	175	19.90
GP-S-802M	M	8'0"/240cm	2	15-40	60	290	5+Tip	220	21.90



Light Range Fishing TELE SPIN



LIGHT RANGE FISHING TELE SPIN

Model	Rod Power	Length	Sections	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
TELE SPIN									
LRF-S-605UL-T	UL	6'0" / 182cm	5	1-7	35	215	4+Tip	94	66.90
LRF-S-706L-T	L	7'0" / 212cm	6	3-12	35	215	5+Tip	103	73.90
LRF-S-766ML-T	ML	7'6" / 228cm	6	8-22	35	215	5+Tip	113	76.90



ALTERA TELE SPIN

ALTERA TELE SPIN RODS FEATURE:

- 24T ultra-light carbon blank construction
- Slim blanks with fast action
- Matt gunsmoke frame SIC guides
- Okuma graphite reel seat
- Aluminum screw end cap with non-skid rubber
- Quality guide cover and cloth bag included



ALTERA TELE SPIN

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Tele Spin									
ALT-S-705M-T	M	213	6	10-30	35	250	4+Tip	116	57.90
ALT-S-806M-T	M	244	7	15-40	35	265	5+Tip	133	63.90



CARBONITE Tele Spin

CARBONITE TELE RODS FEATURE:

- Carbon construction
- Telescopic 5 to 6 sections for fast action
- Double legged SIC guides with rubber shock absorbers
- Strong graphite and Alu reel seat with cushions
- Leather cloth comfortable handle design
- Aluminum screw butt cap

CARBONITE TELE

Model	Rod Power	Length	Casting Wt. (g)	Sections	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
CAR-S-805M-T 60g	M	8'0"/240cm	up to 60	5	10	290	3+Tip	193	43.90
CAR-S-905M-T 60g	M	9'0"/270cm	up to 60	5	10	290	3+Tip	226	49.90
CAR-S-1006M-T 60g	M	10'0"/300cm	up to 140	6	10	390	4+Tip	272	49.90
CAR-S-1006MH-T 90g	MH	10'0"/300cm	up to 60	6	10	390	4+Tip	283	50.90
CAR-S-1006H-T 140g	H	11'0"/330cm	up to 90	6	10	390	4+Tip	311	52.90
CAR-S-1106MH-T 90g	MH	11'0"/330cm	up to 140	6	10	390	4+Tip	328	51.90
CAR-S-1106H-T 140g	H	11'0"/330cm	up to 90	6	10	390	4+Tip	338	55.90
CAR-S-1186MH-T 90g	MH	11'8"/350cm	up to 90	6	10	390	4+Tip	343	53.90
CAR-S-1186H-T 140g	H	11'8"/350cm	up to 140	6	10	390	4+Tip	356	56.90



AMIGO Tele Spin

AMIGO TELE SPIN RODS FEATURE:

- 24T GT blank construction
- Fast action
- Motor sports design inspiration
- Pure energy for fishing
- Stainless steel frame SIC guides
- Graphite cushions reel seat

AMIGO TELE SPIN

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip length (mm)	Number of Guide	Weight (g)	MSRP (€)
Tele Spin									
AMG-S-806M-T	M	240	6	10-30	50	210	4+Tip	201	15.90
AMG-S-906M-T	M	270	6	10-30	50	210	4+Tip	214	17.90

AVENTA Tele Spin

AVENTA TELE RODS FEATURE:

- High module Carbon blank construction
- Wide range fast action tele rods
- Visual tip section
- High quality cork handle
- High quality SIC guides
- Okuma graphite and Alu reel seat
- Alu screw butt cap
- Delivered in cloth bag

AVENTA TELE ROD

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
AVT-S-3006MH-T	MH	300	6	up to 120g	45	380	4+Tip	216	66.90
AVT-S-3306M-T	M	330	6	up to 80g	45	430	5+Tip	223	69.90
AVT-S-3306MH-T	MH	330	6	up to 120g	45	430	5+Tip	244	72.90
AVT-S-3306H-T	H	330	6	up to 150g	45	430	5+Tip	271	75.90
AVT-S-3507MH-T	MH	350	7	up to 120g	45	470	6+Tip	283	77.90
AVT-S-3507H-T	H	350	7	up to 150g	45	470	6+Tip	307	79.90



MAGDA FINN

MAGDA FINN RODS FEATURE:

- E-glass blank construction for maximum durability
- Welded stainless steel guides
- Painting DPS reel seat with Okuma golden metal label.
- EVA fore and rear grips for maximum durability.
- Special wave shape design on fore grip on application.
- Durable non-skid, rubber gimbal.



MAGDA FINN

Model	Rod Power	Length	Sections	Lure Wt. (lbs)	Middlegrip (mm)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Spin										
MF-S-702H	H	7'0"/210cm	2	15-30	80	35	60	8+Tip	203	46.90
MF-S-802H	H	8'0"/240cm	2	15-30	80	35	60	9+Tip	229	49.90

SALAR TROLLING

TROLLING RODS FEATURE:

- Responsive and durable 30T carbon blank construction.
- Heavy duty matt gunsmoke SIC guides.
- Strong Fuji graphite reel seat with cushions.
- ABS round butt cap.
- Supplied in quality cloth bag.



SALAR TROLLING

Model	Rod Power	Length	Sections	Lure Wt. (lbs)	Foregrip length (mm)	Middlegrip (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Spin										
SAL-C-862M	M	8'6"/259cm	2	10-25lbs	180	N/A	295	10+Tip	336	77.90

TOURNAMENT SERIES

TOURNAMENT INLINE RODS FEATURE:

- Supper strong composite & graphite blank construction
- UFR: Ultimate Flex Reinforced rod tip technology
- Double leg SIC guides
- Full EVA handles to reduce the weight
- Okuma graphite reel seat with cushions and hoods
- ABS butt cap



TOURNAMENT UFR TROLLING RODS FEATURE:



TOURNAMENT RODS

Model	Rod Power	Length	Sections	Lure Wt. (lbs)	Foregrip length (mm)	Middlegrip	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
TOURNAMENT INLINE										
TOU-C-762M	M	7'6"/ 228cm	1+1	10-30	205	N/A	280	1+Tip	165	75.90
TOURNAMENT UFR TROLLING										
TOU-C-802M	M	8'0"/ 243cm	2	10-30	205	N/A	275	10+Tip	133	77.90



MAKAIRA

SALTWATER CARBON TECHNOLOGY

MAKAIRA RODS FEATURE:

- Carbon composite rod blank technology
- ALPS deep press 316 stainless guide frames
- Hard Zirconium guide inserts for compatibility with braided lines
- Custom ALPS aluminum reel seats with Abalone under lay
- IGFA tournament rods with full straight or bent aluminum rod butts
- Shrink tube grips for ultimate durability
- ALPS roller guides on trolling rods with large knot clearance
- Aluminum gimbals on trolling and popping rods
- Integrated rubber butt cap/gimbal design on all casting and spinning rods
- Custom abalone decoration above fore grip
- Custom leather wrapped fore grip on IGFA Stand Up rods



C ALPS aluminum butt section

D Bent butt section



NEW ALPS RX PREMIUM ROLLER GUIDES

- * Tournament IGFA series rods feature black and gold RX roller guides
- * All Roller Trolling rods feature gunsmoke RX roller guides



MAKAIRA SALTWATER RODS

Model	Rod Power	Rod Taper	Rod Length (cm)	Line Weight (lbs)	Lure Weight	Sections	Foregrip length (mm)	Reargrip length (mm)	Number of Guides	Handle Style	Weight (g)	MSRP (€)
Makaira IGFA Straight butt Stand-up Rods												
MAK-TR-581-30S	H	M/MF	173	30	N/A	1-pcs	330	300	4 + Tip	C	1012	381.00
MAK-TR-581-50S	XH	M/MF	173	50	N/A	1-pcs	330	300	4 + Tip	C	1055	455.00
MAK-TR-5101-80S	XXXH	M/MF	128	80	N/A	1-pcs	330	360	4 + Tip	C	1165	562.00
Makaira IGFA Bent butt Stand-up Rods												
MAK-TR-5101-120B	XXH	M/MF	178	120	120 lbs	2-pcs	330	380	4 + Tip	D	1440	635.00
Makaira Bent Handle												
NEW ALPS Alu Bent Butt #2	-	-	-	-	-	-	-	-	-	-	-	123.00



SOLTERRA

SOLTERRA BOAT RODS FEATURE:

- Durable E-glass blank construction
- ALPS high-rise stainless guides frame with Zirconium guides inserts
- ALPS Aluminum reel seat with large knot clearance
- Durable 3 split EVA handle design
- Alps Aluminum gimbal with protect cap



SOLTERRA BOAT

Model	Rod Power	Length	Sections	Lure Wt. (lbs)	Foregrip length (mm)	Middlegrip (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
SLT-C-561MH	MH	5'6"/167cm	1+1	30-50	180	90	170	5+Tip	404	149.90
SLT-C-762M	M	7'6"/228cm	1+1	20-30	180	90	170	8+Tip	457	167.90
SLT-C-762MH	MH	7'6"/228cm	1+1	30-50	180	90	170	8+Tip	486	171.90
SLT-C-762H	H	7'6"/228cm	1+1	50-80	180	90	170	8+Tip	516	174.90

SLY

SLY RODS FEATURE:

- Durable E-glass blank construction
- Fuji K-concept tangle free guides with Alconite inserts
- Special spiral guides design for all trolling and tuna rods
- ALPS Aluminum reel seat with large knot clearance
- Alps Aluminum gimbal



SLY

Model	Rod Power	Length (cm)	Sections	Line Wt. (lbs)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Trolling									
SLY-C-661ML	ML	195	1+1	6-8	270	300	9+Tip	442	135.90
SLY-C-621M	M	185	1+1	12-20	270	300	8+Tip	458	136.90
Tuna									
SLY-C-621MH	MH	185	1+1	20-30	270	300	8+Tip	534	138.90
SLY-C-621H	H	185	1+1	30-50	270	300	8+Tip	562	145.90



CORTEZ

CORTEZ BOAT RODS FEATURE:

A super series of rods for modern sea fishing with both lures and Rigs/bait. Strong put-in 1/3 handle section and progressive, relatively tipped 2/3 blank section, with perfectly balanced action to play big fish like Cod, coalfish, halibut and big turbot.

- Light weight, high modulus carbon fiber blanks
- Stainless steel highrise guide frames with SIC rings
- Deluxe Okuma silver label reel seats
- Hard, durable EVA handle
- okuma rubber gimbal for sea fishing
- High quality cloth bag package
- 3-sec rods supplied in deluxe travel bag



CORTEZ BOAT


Model	Rod Power	Length (cm)	Sections	Ling Weight (lbs)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Casting									
CZ-C-662M	M	198	2	20-30	200	30	8+Tip	287	79.90
CZ-C-662MH	MH	223	2	30-50	200	30	8+Tip	298	81.90
CZ-C-742ML	ML	223	2	12-20	200	300	9+Tip	298	83.90
CZ-C-742M	M	223	2	20-30	200	300	9+Tip	302	85.90
CZ-C-742MH	MH	223	2	30-50	200	300	9+Tip	306	88.90
Travel Cast									
CZ-C-663M	M	198	3	20-30	230	340	8+Tip	309	101.90
CZ-C-663MH	MH	198	3	30-50	230	340	8+Tip	320	103.90



CATALINA

CATALINA RODS FEATURE:

- E-glass blank construction for maximum durability
- Heavy duty double foot guide frame
- Polished titanium oxide guide inserts
- Okuma DPS graphite reel seat
- EVA fore and rear grips for maximum durability
- Special cutting flat design on fore grip on application
- Machined aluminum gimbal with EVA cap
- High strength quality cloth bag

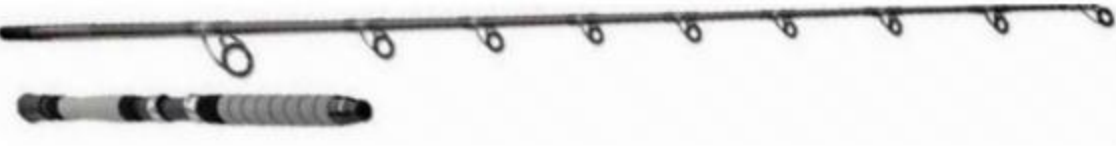

CATALINA

Model	Rod Power	Length	Casting Wt. (g)	Sections	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
CT-C-662MH	MH	6'6" / 198cm	9-14	1+1	240	200	7+Tip	424	78.90

CLASSIC BOAT

CLASSIC BOAT RODS FEATURE:

- Shaped Japanese EVA Handle
- Okuma Quality Reel seat
- Okuma Gimbal but cap
- Quality saltwater resistant components
- Mixed strengthened blanks
- UFR strengthened blanks
- Strong rod bag



CLASSIC BOAT

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
CLA-C-663MH	MH	6'6" / 198 cm	3	20-30	230	310	8+Tip	268	58.90
CLA-C-663H	H	6'6" / 198 cm	3	30-50	230	310	8+Tip	318	59.90
CLA-C-663XH	XH	6'6" / 198 cm	3	50-80	230	310	8+Tip	279	61.90



DEEP SEA BOLENTINO

DEAD SEA BOLENTINO RODS FEATURE:

- Responsive and durable 24T carbon blank construction
- Heavy duty black SIC guides
- Strong graphite reel seat with cushions
- Cross shrink handle sytle
- Provide 2 action solid tip
- Supplied in quality cloth bag



DEEP SEA BOLENTINO

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
DSB-S-902H	H	9'0" 270 cm	2	-	300	40	350	10+Tip	-	-	96.90
DSB-S-1002H	H	10'0" 300cm	2	-	300	-	390	10+Tip	-	311	104.90



HAWAIIAN CUSTOM POPPING RODS FEATURES:

- Light and responsive 24/30-Ton, low resin carbon rod blanks
- 70/30 rod blank design, 2-pcs construction butted in foregrip
- Premium Fuji reel seat for maximum reliability
- Fuji K-concept double foot guide frames, help reduce tangles
- Fuji Alconite guide inserts for abrasion resistance
- Oversized guide sizing allows for improved knot clearance while casting
- 2-pcs blank aides in transportation, but offers max power, based on ferrule location
- Tapered TPE foregrip with TPE rear split grips for reduced weight and balance



A TPE/Compressed cork rear split grip with Fuji pipe reel seat

HAWAIIAN CUSTOM POPPING

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
HWP-S-832Ma	M	8'3" / 251cm	1+1	30-60	30-160	140	490	6+Tip	A	378	161.90



AZORES SLOW JIGGING RODS FEATURE:

- Slim high modulus carbon blank, with power carbon wrap
- Split handle ferrule connection, for natural bending and easy transportation
- Guides from Fuji KWAG Alconite, anti-tangle and saltwater resistant
- Fuji stronger reel seat for sea fishing
- Ergonomic shaped, hard EVA handles
- Integrated rubber butt cap/gimbal
- Delivered in Quality cloth bag



AZORES SLOW JIGGING

Model	Rod Power	Length (cm)	Sections	Casting Wt. (g)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Slow Jigging								
AZ-S-682M 20-90g	M	203	1+1	20-90	60	6+Tip	149	151.90
AZ-S-682MH 60-140g	MH	203	1+1	60-140	60	6+Tip	171	151.90

MAGDA AIR

MAGDA AIR RODS FEATURE:

- Slim high modulus carbon blank, with crossed carbon wrap reinforcement
- Okuma patent UFR TIP technology design on Light jig rods
- All 1-pcs design for perfect bending action
- Fuji K-concept tangle free guides with Alconite inserts
- Spiral guides design for all slow jig rods
- Ergonomic shaped, hard EVA handles
- Fuji reel seat
- High quality cloth bag package



MAGDA AIR

Model	Rod Power	Length	Sections	Line Weight	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle	Weight (g)	MSRP (€)
Slow Jig											
MA-C-661MH	MH	6'6" / 198cm	1	PE 3	220	N/A	410	9+Tip	B	163	132.90
Tai Rubber											
MA-C-682H	H	6'8" / 198cm	1+1	PE0.8-1.5	30-170	N/A	430	12+Tip	D	159	189.90

CEDROS "A" JIG

CEDROS RODS FEATURE:

- E-glass blank offers incredible pulling power
- Glass blanks offer shock reduction when using braided line
- Zirconium guide Inserts reduce friction from braided lines
- ALPS high-rise 316 stainless steel guide frames
- High-rise frames keep the line off the blank and fore grip
- ALPS pyramid-shaped 2-tone anodized aluminum reel seat
- Pyramid reel seat is more ergonomic and offers more control
- Ribbed EVA fore grip improves grip and rod control

CEDROS SPEED JIG

Model	Rod Power	Length	Sections	Casting Weight (lb)	Lure Weight (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
CJ-S-601MHa	MH	6'0" / 180cm	1	90-200	90-200	190	65	5+Tip	396	137.90

CEDROS SLOW JIG

Model	Rod Power	Length	Sections	Casting Weight (lb)	Lure Weight (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
CJ-S-601Ha	H	6'0" / 180cm	1	80-220	160-325	190	65	5+Tip	470	142.90

F2

F2 RODS FEATURE:

- 24T modulus carbon blank
- Split handle ferrule connection, for natural bending and easy transportation
- Seaguide deep press frame guides design
- SIC ring reduce friction from braided lines
- Okuma DPS reel seat
- Hard EVA handle and Rubber gimbal for sea fishing



F2

Model	Rod Power	Length	Sections	Lure Wt. (lbs)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
F2-S-902M	M	9'0" / 270cm	2pcs	14-40	170	480	6+Tip	267	82.90

ECLIPZ

ECLIPZ RODS FEATURE:

- High modulus carbon blank
- Deep sea black guides with Titanium Oxide inserts
- Ergonomic shaped, Hard EVA handles
- Strong Okuma graphite DPS reel seat
- Split handle design for reduced weight and add comfort
- Aluminium Butt cap
- Delivered in quality cloth bag



ECLIPZ

Model	Rod Power	Length (cm)	Sections	Line Wt. (lbs)	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Transport Length (cm)	Weight (g)	MSRP (€)
EC-S-612M	M	185	1+1	-	50-100	170	400	6+Tip	-	275	74.90
EC-S-662M	M	198	1+1	-	70-140	170	400	6+Tip	140	268	78.90

FAST INCHIKU 2

FAST INCHIKU 2 RODS FEATURE:

- Slim and lightweight carbon composite blank
- Split handle ferrule connection, for natural bending and easy transportation
- Quality anti-tangle and saltwater resistant Okuma guides
- Okuma reel seat for sea fishing
- Ergonomic shaped, hard EVA handles
- Delivered in cloth bag

FAST INCHIKU 2

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
FI-C-702H	H	7'0" / 212cm	2	N/A	80-180	N/A	430	9+Tip	161	66.90
FI-S-702H	H	7'0" / 212cm	2	N/A	80-180	N/A	430	6+Tip	168	66.90

TATAKY Pro

TATAKY PRO RODS FEATURE:

- 24T ultra-light carbon blank construction with Okuma UFR technology
- UFR: Ultimate Flex Reinforcement rod tip technology
- Visual white tip design
- Fuji Micro guides
- Quality VSS pipe reel seat
- Split EVA handle design to reduce the weight
- Supplied in quality rod bag



TATAKY PRO

Model	Rod Power	Length (cm)	Sections	Lure Weight (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
TTP-S-682MH	MH	6'8" / 202cm	2	150-200	30	430	11+Tip	117	76.90
TTP-S-802MH	MH	8'0" / 244cm	2	150-200	30	430	12+Tip	138	88.90



TRIO FORCE

TRIO FORCE RODS FEATURE:

- High modulus carbon blank with Okuma patent UFR technology reinforcement
- Split handle ferrule connection, for natural bending and easy transportation
- Seaguide deep press frame guides design
- SIC ring reduce friction from braided lines.
- Okuma DPS reel seat.
- Hard EVA handle and Rubber gimbal for sea fishing.



TRIO FORCE

Model	Rod Power	Length	Casting Wt. (g)	Sections	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
TFO-S-662M	M	6'6" / 197cm	90-210	1+1	140	290	10+Tip	183	65.90



RODSTER SPIN

RODSTER SPIN RODS FEATURE:

- Supper strong composite & graphite blank construction
- UFR: Ultimate Flex Reinforced rod tip technology
- 15% lighter than Classic UFR rods
- Double leg SIC guides
- Full EVA handle with Rubber cork top ring
- Strong graphite reel seat with cushions and hoods
- ABS butt cap on spin models
- Soft ABS gimbal on boat models



RODSTER SPIN

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Handle Style	Weight (g)	MSRP (€)
Spinning										
RST-S-562L	L	167	2	5-15	55	175	5+Tip	A	118	38.90
RST-S-562M	M	167	2	10-30	55	175	5+Tip	A	123	38.90
RST-S-702L	L	213	2	4-15	70	225	5+Tip	A	166	45.90
RST-S-702M	M	213	2	10-30	70	225	5+Tip	A	181	45.90
RST-S-702H	H	213	2	20-60	70	225	5+Tip	A	212	47.90
RST-S-802L	L	244	2	5-20	80	285	5+Tip	A	197	49.90
RST-S-802M	M	244	2	10-30	80	285	5+Tip	A	225	49.90
RST-S-802H	H	244	2	20-60	80	285	5+Tip	A	256	51.90
RST-S-902MH	MH	274	2	20-60	80	405	5+Tip	A	288	56.90
RST-S-902H	H	275	2	40-80	80	405	5+Tip	A	306	58.90
RST-S-1002H	H	304	2	40-80	90	465	6+Tip	A	328	62.90
Boat										
RST-C-602M Boat	M	182	2	20-30lbs	120	405	6+Tip	B	246	45.90
RST-C-702M Boat	M	213	2	20-30lbs	140	425	6+Tip	B	301	51.90



ELETTA

Surf Performance

ELETTA SURF RODS FEATURE:

- 24T and 30T carbon blank construction with solid carbon tip
- Fuji resistant guides
- Protected in a quality guide cover
- Fuji DPS pipe reel seat
- Durable shrink tube handle
- Screw end cap
- High quality travel bag



ELETTA TELE SURF

Model	Rod Power	Length (cm)	Sections	Casting Wt. (g)	Foregrip length	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
ELT-S-1446H-T	H	430	6-Tele	150	N/A	660	4+Tip	448	150.90

SURFLINER SURF

SURFLINER SURF RODS FEATURE:

- Light weight and responsive HM carbon construction
- Quality stainless steel guides
- Anti-slip grip for easy put in / take off
- Okuma graphite cushion reel seat
- ALPS rubber end cap for anti-slip
- Delivered in cloth bag



SURFLINER SURF

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
SFL-S-1503H	H	450	3	100-200	N/A	660	5+Tip	507	99.90

DISTANCE SURF ARENA

DISTANCE SURF ARENA RODS FEATURE:

- Light weight and responsive HM carbon construction
- UFR: Ultimate Flex Reinforcement rod tip technology
- Visual Orange tip section
- Lowrider SIC guides
- Anti-slip grip for easy put in/take off
- Okuma graphite cushion reel seat
- ALPS rubber end cap for anti-slip
- Delivered in cloth bag



DISTANCE SURF ARENA

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
DSA-S-1403H	H	420	3	100-200	N/A	660	5+Tip	461	103.90
DSA-S-1503H	H	450	3	100-200	N/A	660	5+Tip	481	109.90

Wave Power

WAVE POWER SURF RODS FEATURE:

- 24T GT blank construction
- Saltwater resistant deep press guides
- Okuma DPS plate reel seat
- Anti slip handle design



WAVE POWER SURF

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
WP-S-1403H	H	420	3	100-200	N/A	670	5+Tip	585	74.90

AVENGER Pro TELE SURF

AVENGER PRO TELE SURF RODS FEATURE:

- High modulus carbon blank construction
- Deep press guide frames with Titanium Oxide inserts
- Protected in a quality guide cover
- Okuma branded quality reel seat
- Anti slip handle design
- Supplied in quality cloth bag

AVENGER PRO TELE SURF

Model	Rod Power	Length (cm)	Sections	Casting Wt. (g)	Foregrip length	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
AVP-S-1406H-T	H	420	6	100-200	N/A	670	5+Tip	453	109.90



AVP-S-1406H-T

ALARIS TELE SURF

ALARIS TELE SURF RODS FEATURE:

- Carbon construction
- Telescopic 5 sections for fast action
- Visual white tip section
- Double legged SIC guides with rubber shock absorbers
- Okuma graphite and Alu reel seat with cushions
- Aluminum screw butt cap
- Delivered in cloth bag



ALARIS TELE SURF

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
ALS-S-1305H-T	H	390	5-Tele	100-200	640	4+Tip	422	79.90
ALS-S-1405H-T	H	420	5-Tele	100-200	640	4+Tip	499	82.90

AVENGER TELE SURF

AVENGER TELE SURF RODS FEATURE:

- Powerful 24T carbon blank
- Strong guide frame with super hard titaniumoxide insert
- FUJI reel seat
- Comfortable handle design, with high quality
- Velvet cloth bag package



AVENGER TELE SURF

Model	Rod Power	Length (cm)	Sections	Casting Wt. (g)	Foregrip length	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
AV-S-1205MH	MH	360	5	60-140	N/A	N/A	5+Tip	398	83.90

AVENGER TELE BOAT

AVENGER TELE BOAT RODS FEATURE:

- 24T carbon blank construction
- Gunsmoke guide frames with Stainless steel insert
- Fast action with 3 difference power tips
- Okuma branded quality reel seat
- Aluminium Butt cap
- Supplied in quality cloth bag and tip tube

ALARIS TELE BOAT

Model	Rod Power	Length (cm)	Sections	Casting Wt. (g)	Foregrip length	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
AV-S-704H-T	H	210	4	250	N/A	N/A	5+Tip	198	69.90
AV-S-804H-T	H	240	4	250	N/A	N/A	5+Tip	223	73.90
AV-S-1005H-T	H	300	5	250	N/A	N/A	6+Tip	278	84.90



Egi Pro

Superlative Carbon Competitors

The Egi pro are designed to handle the light lures and delicate handling of squids and other light range species.

EGIPRO RODS FEATURE:

- Extremely light weight blank under 30T quality carbon construction
- Fuji micro guide set up and SIC top
- Japanese split handle construction
- Hard EVA + rubber cork handles
- Quality reel seat
- Supplied in quality rod bag



EGIPRO

Model	Rod Power	Length	Sections	Casting Weight	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
EGI-S-802M	M	8'0" /245cm	2	Egi#2.0-3.5	115	235	7+Tip	116	86.90
EGI-S-802M-1	M	8'0" /245cm	2	Egi#2.0-3.5	115	235	7+Tip	116	69.90
EGI-S-862M	M	8'6" /260cm	2	Egi#2.0-3.5	115	235	8+Tip	129	96.90

ALTERA Egi

ALTERA EGI RODS FEATURE:

- 24T carbon with Okuma UFR technology blank construction
- UFR II: Ultimate Flex Reinforcement rod tip technology
- Fuji quality guides
- TVS touched rod blank pipe reel seat
- Ergonomic shaped, split EVA handle design to reduce weight
- Supplied in quality rods bag



ALTERA EGI

Model	Rod Power	Length (cm)	Sections	Lure Weight (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
ALT-S-822M	M	249	2	Egi 2.5-4, 12-28	33	260	8+Tip	126	60.90

BIG SQUID

BIG SQUID RODS FEATURE:

- E-glass blank with power action
- Japanese split EVA handles
- Okuma graphite DPS reel seat
- Quality SIC stainless stain frame guides
- Delivered in cloth bag



BIG SQUID

Model	Rod Power	Length	Casting Wt. (g)	Sections	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
BIG-C-602MH	MH	6'0"/180cm	30-60	1+1	100	110	10+Tip	214	53.90
BIG-C-602H	H	6'0"/180cm	40-100	1+1	100	110	10+Tip	238	53.90

EGING SUPER

EGING SUPER RODS FEATURE:

- 24T carbon construction
- SCT Solid Carbon Tip on two action versions
- Ergonomic touch reel seat
- Stainless steel SIC guides
- Delivered in cloth bag



EGING SUPER

Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
ESU-S-2002M/MH	MH	200 cm	2	100-150	55	120	8+Tip	200	45.90
ESU-S-2502M/MH	MH	250 cm	2	100-150	55	120	9+Tip	277	49.90
ESU-S-2702M/MH	MH	270 cm	2	100-150	55	120	10+Tip	321	53.90

ARIA Egi TELE

ARIA EGI TELE RODS FEATURE:

- 40T Toray ultra-light carbon blank construction
- Fuji KR stainless steel frame guides
- Fuji Alconite inserts reduce friction
- Fuji VSS reel seat, Fuji slidable hook keeper
- Ergonomic shaped, split EVA handle design for reduced weight and feel
- Durable rubber cork end cap for good balance
- High quality cloth bag package



ARIA EGI TELE

Model	Rod Power	Length (cm)	Sections	Lure Weight (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
ARA-S-832M	M	251	2	2-4	90	80	8+Tip	113	124.90

ALTERA Egi TELE

ALTERA EGI RODS FEATURE:

- 24T carbon with Okuma UFR technology blank construction
- UFR II: Ultimate Flex Reinforcement rod tip technology
- Fuji quality guides
- TVS touched rod blank pipe reel seat
- Ergonomic shaped, split EVA handle design to reduce weight
- Supplied in quality rods bag



ALTERA EGI

Model	Rod Power	Length (cm)	Sections	Lure Weight (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
ATE-S-806M-T	M	244	2	Egi#1.8-3.5	33	260	7+Tip	121	58.90



LS-8K carp

LS-8K CARP RODS FEATURE:

- Toray 40T high modulus carbon, slim, light and powerful blank construction
- Guns smoke Deep-drawn frame guides with SIC inserts
- Fuji TVS and DNPS reel seat
- Okuma carbon line clip
- Slim cone EVA with durable shrink tube butt handle
- Engraved aluminum butt cap
- New Semi tele version carp rods are available
- High quality cloth bag



LS-8K CARP

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Reargrip Length (mm)	Number of Guide	Handle style	Transport Length (cm)	Weight (g)	MSRP (€)
LS8K-CA-1202XH	XH	12'0" / 366cm	2	3.50	520	5+Tip	A	186	330	163.90
LS8K-CA-1302XH	XH	13'0" / 396cm	2	3.50	545	5+Tip	A	202	365	171.90

8K Carp

8K CARP RODS FEATURE:

- 40T Toray carbon material, slim, light and powerful blank construction
- Black stainless steel frame guides with SIC inserts
- Fuji DPS pate reel seat
- Okuma carbon line clip
- Slim and Ergonomic shape EVA with durable shrink tube butt handle
- Engraved aluminum butt cap
- High quality cloth bag

8K CARP

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
8K-CA-1002MH	MH	10'0" / 305cm	2	3.0	20	560	5+Tip	213	119.90
8K-CA-1202MH	MH	12'0" / 366cm	2	3.0	20	560	5+Tip	252	125.90
8K-CA-1202H	H	12'0" / 366cm	2	3.5	20	560	5+Tip	290	134.90
8K-CA-1302H	H	13'0" / 396cm	2	3.5	20	560	5+Tip	319	144.90

EPIX V2 Carp

EPIX V2 CARP RODS FEATURE:

- Fantastic blank construction with SIC guides.
- High quality reel seat
- Ergo grip construction for extra long casting
- Eight rods are available including a spod rod.



EPIX V2 CARP

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
EP-CA-1202H	H	12'0" / 366cm	2	3.5	N/A	590	5 + Tip	360	109.90
EP-CA-1302H	H	13'0" / 390cm	2	3.5	20	590	5+Tip	384	112.90
EP-CA-1303H	H	13'0" / 390cm	3	3.5	20	590	5+Tip	401	122.90

LS-6K Carp

LS-6K CARP RODS FEATURE:

- Slim and light weight 30T carbon Blank
- Exclusive Okuma BOPP blank covering
- Okuma DPS reel seat
- Okuma carbon line clip
- Ergonomic shape EVA with durable shrink tube butt handle
- Engraved aluminum butt cap
- High quality cloth bag



LS-6K CARP

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
LS-CA-1002MH	MH	10'0" / 305cm	2	3.0	20	560	5+Tip	261	86.90
LS-CA-1202MH	MH	12'0" / 366cm	2	3.0	20	560	5+Tip	296	95.90
LS-CA-1202H	H	12'0" / 366cm	2	3.5	20	560	5+Tip	341	98.90
LS-CA-1302H	H	13'0" / 396cm	2	3.5	20	590	5+Tip	378	107.90
LS-CA-1303H	H	13'0" / 396cm	3	3.5	20	590	5+Tip	385	114.90

Custom Black carp

CUSTOM BLACK CARP RODS FEATURE:

- Slim and light weight 24T carbon blank
- SIC Guides
- Heavy Duty Okuma graphite reel seat
- Ergonomic shaped EVA with durable shrink tube handle
- Supplied in a quality rod bag



CUSTOM BLACK CARP

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
CB-CA-1202MH	MH	12'0" / 366cm	2	3.0	20	560	5+Tip	334	91.90
CB-CA-1202H	H	12'0" / 366cm	2	1.6	20	560	5+Tip	370	97.90
CB-CA-1203H	H	12'0" / 366cm	3	1.6	20	560	5+Tip	367	102.90
CB-CA-1302H	H	13'0" / 396cm	2	1.6	20	590	5+Tip	423	101.90
CB-CA-1303H	H	13'0" / 396cm	3	1.6	20	590	5+Tip	388	109.90
CB-CA-1202XXH	XXH	12'0" / 366cm	2	2.3	20	590	5+Tip	391	104.90
CB-CA-1302XXH	XXH	13'0" / 396cm	2		20	590	5+Tip	430	113.90



C-FIGHT Carp

C-FIGHT CARP RODS FEATURE:

- Light weight 24T carbon blank
- Exclusive camouflage blank covering
- Minimalistic artwork matching UK codes
- Semi matt frame SIC guides
- Starting guide 50mm on 12'0"
- Slim EVA butt handle
- Engraved aluminum butt cap
- Graphite reel sat with cushions
- Telescopic version available



C-FIGHT CARP

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
CF-CA-802M	M	8'0" / 244cm	2	2.50	N/A	380	5+Tip	168	48.90
CF-CA-902M	M	9'0" / 274cm	2	2.75	N/A	450	5+Tip	208	53.90
CF-CA-1002MH	MH	10'0" / 305cm	2	3.00	N/A	500	5+Tip	273	59.90
CF-CA-1202H	H	12'0" / 366cm	2	3.25	N/A	550	5+Tip	354	68.90
CF-CA-1202XH	XH	12'0" / 366cm	3	3.50	N/A	550	5+Tip	378	74.90
CF-CA-1203XH	XH	12'0" / 366cm	3	3.50	N/A	550	5+Tip	350	81.90
CF-CA-1302XH	XH	13'0" / 396cm	2	3.50	N/A	550	6+Tip	408	86.90
TELE									
CF-CA-1206H-T	H	12'0" / 366cm	6-Tele	3.25	N/A	570	5+Tip	295	81.90
CF-CA-1206XH-T	XH	12'0" / 366cm	6-Tele	3.50	N/A	570	5+Tip	312	84.90
CF-CA-1306XH-T	XH	13'0" / 396cm	6-Tele	3.50	N/A	570	5+Tip	334	89.90
SPOD Carp									
CF-CA-1202XXH	XXH	12'0" / 366cm	2	4.5	N/A	550	5+Tip	382	83.90

Longbow Carp

Longbow Carp Rods Feature:

- Durable carbon blanks construction
- Quality stainless steel minima guides
- Okuma DPS pipe reel seat



Longbow Carp

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
CARP									
LB-CA-1202H	H	12'0" / 366cm	2	3.5	20	560	5+Tip	365	58.00
LB-CA-1302H	H	13'0" / 396cm	2	3.5	20	560	5+Tip	388	67.90
TELE CARP									
LB-CA-3607MH-T	MH	12'0" / 360cm	7	3.0	20	550	5+Tip	358	77.90
LB-CA-3907H-T	H	13'0" / 390cm	7	3.5	20	550	5+Tip	382	84.90

AVENGER Carp

AVENGER CARP RODS FEATURE:

- Light weight carbon blanks
- Quality stainless steel guides
- Heavy Duty Okuma graphite reel seat
- Supplied in rod bag

AVENGER CARP

Model	Rod Power	Length	Sections	Line Wt. (lbs)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
AV-CA-1002MH	MH	10'0" / 305cm	2	3.0	20	500	5+Tip	268	54.90
AV-CA-1202MH	MH	12'0" / 366cm	2	3.0	20	560	5+Tip	324	61.90
AV-CA-1202H	H	12'0" / 366cm	2	3.5	20	560	5+Tip	344	66.90
AV-CA-1203H	H	12'0" / 366cm	3	3.5	20	560	5+Tip	367	69.90
AV-CA-1202XH	XH	12'0" / 360cm	2	4.5	20	560	5+Tip	389	71.90
AV-CA-1302H	H	13'0" / 396cm	2	3.5	20	560	6+Tip	420	74.90
TELE									
AV-CA-1206MH-T	MH	12'0" / 366cm	6-Tele	3.5	20	560	5+Tip	305	74.90
AV-CA-1206H-T	H	12'0" / 366cm	6-Tele	3.5	20	560	5+Tip	319	78.90

TOMCAT

TOMCAT RODS FEATURE:

- Responsive and durable 24T carbon blank construction
- Heavy duty matt gunsmoke SIC guides
- CCS Seaguide for Vertical item
- Strong graphite reel seat with cushions
- Rubber round butt cap
- 4 series covering all type of carpfish disciplines
- Supplied in quality cloth bag

TOMCAT

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
SPIN									
TMC-S-702MH	MH	7'0" / 213cm	2	60-160	120	380	6+Tip	300	61.90
TMC-S-802MH	MH	8'0" / 244cm	2	60-160	120	410	6+Tip	350	65.90
TMC-S-902M	M	9'0" / 274cm	2	40-120	120	460	6+Tip	362	68.90
TMC-S-902MH	MH	9'0" / 274cm	2	60-160	120	460	6+Tip	394	69.90
X-STRONG									
TMC-S-902H	H	9'0" / 274cm	2	150-280	135	485	6+Tip	401	71.90
TMC-S-902XH	XH	9'0" / 274cm	2	200-300	135	485	6+Tip	445	71.90
TMC-S-992XH	XH	9'9" / 297cm	2	200-300	135	485	7+Tip	528	75.90
EXPERT									
TMC-S-1062H	H	10'6" / 320cm	2	100-250	200	465	7+Tip	198	94.90
VERTICAL									
TMC-S-601MH	MH	6'0" / 183cm	1	150	130	350	6+Tip	262	73.90

BATTLE CAT

BATTLE CAT RODS FEATURE:

- 30T High modulus carbon blank construction
- X-Heavy 3 footed guides with Zirconium inserts to reduce friction
- Durable X-heavy DPS reel seat
- Grey camouflage EVA handles and integrated rubber gimbal cap
- Quality cloth bag package

BATTLE CAT

Model	Rod Power	Length (cm)	Sections	Line Wt. (g)	Foregrip / middle length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
BC-S-962XH	XH	285	2	150-300	150 mm / 30mm	380	6 + Tip	469	92.90



8K

8K FEEDER RODS FEATURE:

- Ultra light 40T carbon blank construction
- Faster action with 2 different power tips
- Black frame SIC guides
- Fuji DPS plate reel seat
- AAA cork quality full handle
- High quality rods bags



8K FEEDER

Model	Rod Power	Length	Sections	Casting Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
8K-F-1002M	M	10'0" / 305cm	2	30	65	430	12+Tip	130	152.90
8K-F-1102M	M	11'0" / 335cm	2	45	65	430	12+Tip	139	155.90
8K-F-1203M	M	12'0" / 366cm	3	20-60	65	450	13+Tip	186	164.90
8K-F-1203MH	MH	12'0" / 366cm	3	40-80	65	450	13+Tip	192	167.90
8K-F-1203H	H	12'0" / 366cm	3	60-120	65	450	13+Tip	202	174.90
8K-F-1303MH	MH	13'0" / 396cm	3	40-80	65	450	14+Tip	206	174.90
8K-F-1303H	H	13'0" / 396cm	3	60-120	65	450	14+Tip	208	184.90
8K-F-1403XH	XH	14'0" / 427cm	3	150	65	470	15+Tip	264	199.90

LS-6K

LS-6K FEEDER RODS FEATURE:

- Slim and light weight 30T carbon blanks
- Faster action with 2 different power tips
- Exclusive Okuma BOPP blank covering
- Gun-smoke SIC guides
- Okuma DPS reel seat
- Quality cork quality full handle
- Supplied in quality rods bags



LS-6K FEEDER

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
6K-F-1002M	M	10'0" / 305cm	2	30	65	430	12+Tip	163	78.90
6K-F-1102M	M	11'0" / 335cm	2	45	65	430	12+Tip	175	81.90
6K-F-1203M	M	12'0" / 366cm	3	20-60	65	450	13+Tip	191	87.90
6K-F-1203MH	MH	12'0" / 366cm	3	40-80	65	450	13+Tip	204	89.90
6K-F-1203H	H	12'0" / 366cm	3	60-120	65	450	13+Tip	216	94.90
6K-F-1303MH	MH	13'0" / 396cm	3	40-80	65	450	14+Tip	219	96.90
6K-F-1303H	H	13'0" / 396cm	3	60-120	65	450	14+Tip	235	99.90
6K-F-1303XH	XH	13'0" / 396cm	3	> 150	65	470	14+Tip	261	109.90
6K-F-1403XH	XH	14'0" / 427cm	3	> 150	65	470	15+Tip	305	113.90



Custom Black Feeder

CUSTOM BLACK FEEDER RODS FEATURE:

- Slim and light weight 30T carbon blanks
- Fast action with 3 different power tips
- Unique use of Bopp Blank protect film
- Quality stainless steel guides
- Okuma graphite reel seat
- Supplied in quality rod bag



CUSTOM BLACK FEEDER

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Feeder									
CB-F-1003MH	MH	10'0" / 305cm	3	> 80	65	450	12+Tip	172	81.90
CB-F-1203H	H	12'0" / 366cm	3	60-120	65	450	13+Tip	248	93.90
CB-F-1203MH	MH	12'0" / 366cm	3	40-80	65	450	13+Tip	219	87.90
CB-F-1303H	H	13'0" / 396cm	3	60-120	65	450	14+Tip	294	97.90
CB-F-1303MH	MH	13'0" / 396cm	3	40-80	65	450	14+Tip	249	95.90
Method Feeder									
CB-F-1103MH	MH	11'0" / 335cm	3	>60	65	430	12+Tip	197	79.90
CB-F-1203MH	MH	12'0" / 366cm	3	>60	65	450	13+Tip	213	84.90
River Feeder									
CB-F-1303XH	XH	13'0" / 396cm	3	>150	65	470	14+Tip	299	101.90
CB-F-1403XH	XH	14'0" / 427cm	3	>150	65	490	15+Tip	327	106.90

SOLITRON FEEDER

SOLITRON FEEDER FEATURE:

- 24t (IM6 Carbon) construction
- Cork/Eva handle
- Screw down R/S
- Titanium Oxide Guide Inserts
- Aluminium Butt cap
- 3 Interchangeable tips 5 Models 330-390 cm



SOLITRON FEEDER

	Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Feeder Medium										
NEW	SO-F-1103MH	MH	330	3	30-70	65	480	12+Tip	240	112.90
NEW	SO-F-1203MH	MH	360	3	30-70	65	480	13+Tip	245	116.90
Feeder Heavy										
NEW	SO-F-1203H	H	360	3	50-100	65	480	13+Tip	228	120.90
NEW	SO-F-1303H	H	390	3	50-100	65	480	14+Tip	277	124.90
Feeder X-Heavy										
NEW	SO-F-1203XH	XH	360	3	80-130	65	480	13+Tip	247	123.90
NEW	SO-F-1303XH	XH	390	3	80-130	65	480	14+Tip	286	131.90

Ceymar

CEYMAR FEEDER FEATURE:

- Slim and balance carbon blank construction
- Progressive action
- Supplied with 3 solid tips in tube
- Quality stainless steel frame guides
- Polished Titanium Oxide guide inserts
- Okuma DPS reel seat
- Quality cork and EVA handles
- Supplied in quality rods bag



CEYMAR FEEDER

	Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
Feeder										
	C-F-1003MH	MH	300	3	40-80	65	450	12+Tip	202	71.90
	C-F-1203MH	MH	360	3	40-80	65	450	13+Tip	261	74.90
	C-F-1203H	H	360	3	60-120	65	450	13+Tip	282	79.90
	C-F-1303MH	MH	390	3	40-80	65	450	14+Tip	295	79.90
	C-F-1303H	H	390	3	60-120	65	450	14+Tip	334	85.90
Method Feeder										
	C-F-1103MH-1	MH	330	3	>60g	65	430	12+Tip	232	69.90
	C-F-1203MH-1	MH	360	3	>60g	65	450	13+Tip	254	73.90
River Feeder										
	C-F-1303XH-1	XH	390	3	>150g	65	450	14+Tip	369	85.90
	C-F-1403XH-1	XH	420	3	>150g	65	470	15+Tip	386	96.90

REVENGER FEEDER

REVENGER FEEDER RODS FEATURE:

- Slim and balanced carbon blanks.
- Progressive action.
- Supplied with 3 tips in tube for all feeder rods.
- Quality black frame guides.
- Polished Titanium Oxide guide inserts.
- Okuma quality graphite reel seat.
- 3 split hard EVA handles.
- Supplied in quality rod bag.



REVENGER FEEDER

Model	Rod Power	Length (cm)	Sections	Lure Weight (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
RV-F-1203MH	MH	360	3	up to 100	50	125	11+Tip	290	69.90



COMPETITION POLE

COMPETIRION POLE RODS FEATURE:

- Light weight carbon blank construction
- Durable components
- 6 different colors Purple, Yellow, Blue, Red, Green and Orange
- Supplied in quality rods bag

COMPETITION TELE POLE

Model	Rod Power	Length (cm)	Sections	Transport Length (cm)	Weight (g)	MSRP (€)
Competition Pole 4004MH	MH	400	4	120	157	29.90
Competition Pole 5005MH	MH	500	5	120	229	39.90
Competition Pole 6006MH	MH	600	6	120	332	49.90
Competition Pole 7007MH	MH	700	7	120	431	59.90
Competition Pole 8008MH	MH	800	8	120	578	69.90

SIIKA

SIIKA RODS FEATURE:

- 24T GT blank construction
- Saltwater resistant deep press guides
- Okuma DPS plate reel seat
- Anti slip handle design



SIIKA

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
SII-F-802M	M	8'0" / 240cm	2	10-35	30	80	60	9+Tip	216	36.90

G-POWER Tele Pole

G-POWER TELE POLE RODS FEATURE:

- Strong composite blank construction
- Durable components



G-POWER TELE POLE

Model	Rod Power	Length (cm)	Sections	Transport Length (cm)	Weight (g)	MSRP (€)
G-Power Pole 3003M	M	300	3	115	115	6.90
G-Power Pole 4004M	M	400	4	115	200	8.90
G-Power Pole 5005M	M	500	5	115	331	12.90
G-Power Pole 6006M	M	600	6	115	466	18.90
G-Power Pole 7007M	M	700	7	115	618	23.90
G-Power Pole 8008M	M	800	8	115	775	29.90

MERIDIANA Bolo

MERIDIANA RODS FEATURE:

- Toray 46T Hi modulus carbon blank construction with Okuma UFR technology
- UFR II: Ultimate Flex Reinforcement rod tip technology
- Seaguide Saltwater resistant light guides for Tele Bolo
- Fuji NS stainless steel plate reel seat
- Protected in a quality guides cover



MERIDIANA BOLO

Model	Rod Power	Length (cm)	Sections	Reargrip Length (cm)	Number of Guide	Transport Length (cm)	Weight (g)	MSRP (€)
MERIDIANA BOLO 6006MH	MH	600	6	420	8+Tip	148	618	249.90

ASTRAL Bolo

ASTRAL BOLOGNESS ROD FEATURE:

- Full carbon construction
- Stainless steel guides with Titanium Oxide insert
- Adjustable stainless steel reel seat with cushion
- Telescopic construction
- 6 Models available 3-5m
- Supplied quality rod bag



ASTRAL BOLO

Model	Rod Power	Length	Sections	Reargrip Length (cm)	Number of Guide	Transport Length (cm)	Weight (g)	MSRP (€)
ASTRAL BOLO 6006M	M	19'8"/600cm	5	N/A	8+Tip	-	434	84.90



COMPETITION Bolo

COMPETITION BOLO RODS FEATURE:

- Durable 24+30T carbon blank construction
- Quality stainless steel light guides for Tele Bolo
- Protected in a quality guide cover
- Quality stainless steel plate reel seat
- Supplied in a quality rod bag



COMPETITION BOLO

Model	Rod Power	Length (cm)	Sections	Reargrip Length (mm)	Number of Guide	Transport Length (cm)	Weight (g)	MSRP (€)
COMPETITION Bolo 4004MH	MH	400	4-Tele	450	5+Tip	124	186	48.90
COMPETITION Bolo 5005MH	MH	500	5-Tele	450	6+Tip	126	268	57.90
COMPETITION Bolo 6006MH	MH	600	6-Tele	450	7+Tip	127	387	64.90
COMPETITION Bolo 7007MH	MH	700	7-Tele	450	8+Tip	128	499	73.90



SOLITRON MATCH

SOLITRON MATCH RODS FEATURE:

- IM6 Construction
- Titanium oxide guide inserts
- Hard EVA & high quality cork handle
- Stainless steel hooded reel seat
- Aluminium butt cap with logo
- Three piece construction

SOLITRON MATCH

	Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
	Match Medium									
NEW	SO-M-1303M	M	390	3	5-25	-	-	13	190	77.90
NEW	SO-M-1403M	M	420	3	5-25	-	-	14	228	85.90
NEW	SO-M-1503M	M	450	3	5-25	-	-	14	269	91.90



Custom Black

CUSTOM BLACK MATCH FEATURE:

- 30T+40T Hi modulus carbon, slim, light weight and balanced blanks
- Okuma Unique Bopp blank protect film
- Quality stainless steel frame guides
- Polished Titanium Oxide guide inserts
- Okuma DPS pipe reel seat
- Quality cork and EVA handles
- Supplied in quality rods bag



CUSTOM BLACK MATCH

	Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
	CB-MA-1303	M	13'0" / 396cm	3	5-25	65	430	12+Tip	204	79.90
	CB-MA-1403	M	14'0" / 427cm	3	5-25	65	430	13+Tip	224	84.90

Ceymar

CEYMAR MATCH RODS FEATURE:

- Light weight and balance carbon blank construction
- Progressive action
- Quality stainless steel frame guides
- Polished Titanium Oxide guide inserts
- Okuma DPS pipe reel seat
- Quality cork and EVA handles
- Supplied in quality rods bag



CEYMAR MATCH

	Model	Rod Power	Length (cm)	Sections	Lure Wt. (g)	Foregrip length (mm)	Reargrip Length (mm)	Number of Guide	Weight (g)	MSRP (€)
	C-M-1303M	M	390	3	5-25	65	430	12+Tip	237	65.90
	C-M-1303MH	MH	390	3	10-35	65	395	12+Tip	272	67.90
	C-M-1403M	M	420	3	5-25	65	430	13+Tip	257	69.90





COMBOS

A key component of our mission at Okuma Fishing Tackle is to maintain fishing as accessible to all interested people. Part of that effort includes our involvement in numerous conservation and fishing organizations. On the product side, it's our rod and reel combos that receive the focus. Our selection is backed by our commitment to make that first step into fishing an incredibly positive experience. We fill these products with color and excitement in addition to value and performance, because catching the eye is the first step in creating an angler.

FIN-CHASER X

FIN CHASER "X" SERIES COMBOS FEATURE:

- Durable glass fiber rod blank construction
- All models feature a comfortable EVA fore grip
- Rear grip on 6'-7" combos feature split cork
- Rear grips on 8' and larger combos is full EVA
- Multi-disc oil felt drag washers
- All models feature a 1 ball bearing drive system
- Machined aluminum, anodized spool
- Fin Chaser 8' and larger feature double foot guide construction
- All Fin Chaser rods feature 2-pcs blanks for transportation



FIN CHASER "X" SERIES COMBOS

Model	Rod Power	Rod Length	Line Weight	Lure Weight	Sections	Reel Model	Bearings	Reel Color	With Line	Line Capacity	MSRP (€)
FNX-602-30PK	ML	6' 0" / 183cm	N/A	1/8-3/8oz	2	FNX-30	1BB	Pink	Yes	310/3, 250/4, 165/6	33.60
FNX-662-30BL	M	6' 6" / 198cm	N/A	1/8-1/2oz	2	FNX-30	1BB	Blue	Yes	310/3, 250/4, 165/6	35.00
FNX-662-30YL	M	6' 6" / 198cm	N/A	1/8-1/2oz	2	FNX-30	1BB	Yellow	Yes	310/3, 250/4, 165/6	35.00
FNX-662-30PK	M	6' 6" / 198cm	N/A	1/8-1/2oz	2	FNX-30	1BB	Pink	Yes	310/3, 250/4, 165/6	35.00
FNX-70-40BL	MH	7' 0" / 213cm	N/A	1/4-3/4oz	2	FNX-40	1BB	Blue	Yes	190/10, 140/12, 110/15	39.90
FNX-80-40BL	MH	8' 0" / 244cm	N/A	1/2-1 1/2oz	2	FNX-40	1BB	Blue	Yes	190/10, 140/12, 110/15	41.30

STEELER XP

STEELER XP COMBOS FEATURE:

- Durable glass fiber rod blank construction
- Feature comfortable EVA fore and rear split grip
- Multi-disc front drag washer system
- All models feature a 1 ball bearing drive system
- Reels are pre-spooled with monofilament line
- All Steeler rods are 2-pcs for easy transportation



STEELER XP COMBOS

Model	Rod Power	Rod Length	Line Weight	Lure Weight	Sections	Reel Model	Bearings	Reel Color	With Line	Line Capacity	MSRP (€)
SLXP-662-20BO	M	6' 6" / 195cm	N/A	1/8-1/2 oz	2	SLXP-20	1BB	Orange	Yes	265/3, 220/4, 180/6	25.90
SLXP-662-20GR	M	6' 6" / 195cm	N/A	1/8-1/2 oz	2	SLXP-20	1BB	Green	Yes	265/3, 220/4, 180/6	25.90
SLXP-662-20PK	M	6' 6" / 195cm	N/A	1/8-1/2 oz	2	SLXP-20	1BB	Pink	Yes	265/3, 220/4, 180/6	25.90

VIBE COMBOS

VIBE COMBO FEATURE:

- Durable glass fiber rod blank construction
- Feature comfortable EVA split handle
- There are 4 difference color rods for choose
- All models are 2pcs for easy transportation
- Match the Vibe reel to sale



VIBE COMBOS

Model	Rod Power	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip	Reargrip Length (mm)	Number of Guide	MSRP (€)
VB-602M-25BU	M	6'0"/180cm	2	5-20	20	20	55	4+Tip	26.60
VB-602M-25GR	M	6'0"/180cm	2	5-20	20	20	55	4+Tip	26.60
VB-602M-25PK	M	6'0"/180cm	2	5-20	20	20	55	4+Tip	26.60
VB-602M-25OR	M	6'0"/180cm	2	5-20	20	20	55	4+Tip	26.60

AIR FRAME FLY COMBO

AIR FRAME FLY COMBO FEATURE:

- Spooled with backing, fly line and tippet
- 3-piece, sensitive graphite rods
- Aluminum oxide stripper guides
- Stainless steel snake guides
- Fully adjustable disc drag system
- Roller bearing engages drag in one direction
- Lightweight graphite frame construction
- Graphite large arbor spool design
- Quick change left/right hand retrieve



AIR FRAME FLY COMBOS

Model	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip	Reargrip Length (mm)	Number of Guide	MSRP (€)
AFa-903-5	9'0" / 270cm	3	5	180	N/A	N/A	9+Tip	119.00
AFa-903-6	9'0" / 270cm	3	6	180	N/A	N/A	9+Tip	119.00
AFa-963-7	9'6" / 290cm	3	7	180	N/A	N/A	9+Tip	129.00

NOMAD XPRESS FLY COMBO

NOMAD XPRESS FLY COMBO FEATURE:

- 24/30-Ton carbon, ultra-sensitive and responsive blank construction
- 4-pcs rod blank construction for easy transportation
- Aluminum large arbor fly reel design allows for increased line pickup
- Fly reel is pre-spooled with fly line, backing and tippet
- Traditional contoured cork grips for durability and comfort
- Rugged and compact carry bag for hiking and storage



NOMAD XPRESS FLY COMBOS

Model	Length	Sections	Lure Wt. (g)	Foregrip length (mm)	Middlegrip	Reargrip Length (mm)	Number of Guide	MSRP (€)
NTxf-904-5	9'0" / 270cm	4	5	190	N/A	N/A	9+Tip	169.00
NTxf-904-6	9'0" / 270cm	4	6	190	N/A	N/A	9+Tip	175.00
NTxf-904-7	9'0" / 270cm	4	7	190	N/A	N/A	9+Tip	179.00
NTxf-904-8	9'0" / 270cm	4	8<	190	N/A	N/A	9+Tip	179.00



ACCESSORIES

OKUMA CLOTHING



Okuma Motif Tournament Jersey

Size	S	M	L
Model	PA01T030BS	PA01T030BM	PA01T030BL
Size	XL	2L	3L
Model	PA01T030BXL	PA01T030B2L	PA01T030B3L



Okuma Carp Jersey

Size	S	M	L
Model	PA01T055GS	PA01T055GM	PA01T055GL
Size	XL	2L	3L
Model	PA01T055GXL	PA01T055G2L	PA01T055G3L

OKUMA CLOTHING



Okuma Motif Full-Zip Hoodie

Size	S	M	L
Model	PA01J005KS	PA01J005KM	PA01J005KL
Size	XL	2L	3L
Model	PA01J005KXL	PA01J005K2L	PA01J005K3L



Okuma Motif Black Hoodie

Size	S	M	L
Model	PA01T034BS	PA01T034BM	PA01T034BL
Size	XL	2L	3L
Model	PA01T034BXL	PA01T034B2L	PA01T034B3L



Okuma Motif Polo Shirt

Size	S	M	L
Model	PA01T039BS	PA01T039BM	PA01T039BL
Size	XL	2L	3L
Model	PA01T039BXL	PA01T039B2L	PA01T039B3L



Okuma Motif Cotton Short Sleeve Shirt

Size	S	M	L
Model	PA01T033BS	PA01T033BM	PA01T033BL
Size	XL	2L	3L
Model	PA01T033BXL	PA01T033B2L	PA01T033B3L



Okuma Motif Cotton Short Sleeve Shirt

Size	S	M	L
Model	PA01T038WS	PA01T038WM	PA01T038WL
Size	XL	2L	3L
Model	PA01T038WXL	PA01T038W2L	PA01T038W3L

OKUMA CLOTHING



Okuma Motif Cotton Cap
Model: PA01C017B



Okuma Motif Mesh Cap
Model: PA01C018B



Okuma Motif Flat Peak Hat
Model: PA01C022K



Okuma Motif Blue Sun Shield
Model: PA01C020B

Okuma Water Resistant Jacket

- Water-resistant, breathable, seam-sealed, 2-layer stretch shell
- 100% windproof fabric
- Attached, fully adjustable hood
- Water-resistant zip
- Adjustable cuff tabs
- Hem cinch-cord
- Reflection printing

Size	S	M	L
Model	PA01J004BS	PA01J004BM	PA01J004BL
Size	XL	2L	3L
Model	PA01J004BXL	PA01J004B2L	PA01J004B3L



OKUMA DISPLAYS



Okuma Rod Display 6+6
Model: M6OK0271537



Okuma Rod Display 12+12
Model: M6OK0271538



Okuma Iron Display
Blue model: M6OK0271542
Gray model: M6OK0271543



Okuma Rod Display 18+18
Model: M6OK0271539



Okuma Reel stand
Blue model: M6OK0271540
Gray model: M6OK0271541



Okuma Dealer Sticker
Model: M5OK0011623
Size: 20 x 8 cm

okuma
INSPIRED FISHING

www.okumafishing.com